

FROM
BELGIUM
WITH
LOVE



WEVER & DUCRÉ
LIGHTING











































**LIFE IS
TOO SHORT
FOR BORING
LIGHTING**




































WEVER & DUCRÉ
LIGHTING




























CONTENT

DESIGNER FAMILIES








ROOMOR p. 23 – 41	 CEILING p. 25	 CEILING p. 27	 SUSPENDED p. 29	 WALL p. 31	 WALL p. 35	 TABLE p. 39	 FLOOR p. 41	
WIRO p. 43 – 73	 CONE p. 46	 WIRO p. 47	 DIAMOND p. 53	 INDUSTRY p. 61	 GLOBE p. 61	 WALL p. 67	 TABLE p. 71	 FLOOR p. 73
MIRRO p. 75 – 87	 CEILING p. 77	 SUSPENDED p. 79	 WALL p. 81	 WALL p. 81	 TABLE p. 85	 FLOOR p. 87		
DRO p. 89 – 101	 CEILING p. 89	 SUSPENDED p. 91	 WALL p. 93	 WALL p. 93	 TABLE p. 97	 TABLE p. 99	 FLOOR p. 101	 FLOOR p. 101
ROCK p. 103 – 113	 SUSPENDED p. 103	 TABLE p. 109	 FLOOR p. 109	 NAKED p. 113				
REVER p. 115 – 133	 SUSPENDED p. 117	 WALL p. 119	 TABLE p. 123	 TABLE p. 127	 FLOOR p. 131			
J.J.W. p. 135 – 147	 CEILING p. 137	 SUSPENDED p. 139	 SUSPENDED p. 141	 WALL p. 143				

INDOOR

CEILING RECESSED p. 149 – 229								
 DEEP PETIT p. 153	 DEEP p. 155	 DEEP AD. PETIT p. 159	 DEEP ADJUST p. 161	 DEEP ASYM p. 167	 DEEP IP44 p. 169	 DEEP 2.0 p. 171	 DEEPER p. 173	
 DEEPER IP44 p. 175	 RONY p. 179	 RON p. 181	 RINI IP44 p. 185	 RINI SNEAK IP44 p. 187	 PYRAMID p. 189	 PLANO PETIT p. 191	 PLANO p. 193	 STRANGE PETIT p. 197
 STRANGE p. 199	 LUNA ROUND IP44 p. 201	 LUNA SQUARE IP44 p. 203	 LITO p. 205	 SNEAK TRIM p. 207	 SNEAK TRIMLESS p. 209	 HIDE p. 211	 CITY IP44 p. 215	 CORY p. 217
 CORO p. 219	 MIRBI IP44 p. 221	 MIRBI IP44 p. 221	 SPYDER p. 223	 SPINEO p. 225	 NOP PETIT p. 227	 NOP p. 229		

CEILING SURFACE p. 231 – 305								
 ROOMOR p. 27	 MIRRO p. 77	 DRO p. 89	 J.J.W. p. 137	 VENN p. 233	 BEBOW p. 235	 SOLID p. 239	 SIRRA p. 243	 SIRRO p. 245
 BOX p. 249	 DOCUS p. 255	 HEXO p. 259	 RAY p. 265	 ROB IP44 p. 269	 ROBY IP44 p. 271	 TOWNA IP44 p. 273	 CORY p. 275	 CORO p. 277
 MIRBI IP44 p. 279	 MIRBI IP44 p. 279	 PLUXO p. 281	 SARA p. 283	 SARA p. 285	 TORCO p. 287	 SQUBE p. 289	 SQUBE p. 295	 ELLO p. 303































CEILING SUSPENDED p. 307 – 379													
 ROOMOR p. 29	 CONE p. 46	 WIRO p. 47	 DIAMOND p. 53	 INDUSTRY p. 61	 GLOBE p. 61	 MIRRO p. 79	 DRO p. 91						
 ROCK p. 103	 REVER p. 117	 J.J.W. p. 139	 WETRO p. 309	 DINOR p. 313	 DINOR p. 313	 DINOR p. 313	 SHIEK p. 315	 SHIEK p. 317					
 BISHOP p. 325	 BEBOW p. 333	 VENN p. 337	 GIGANT p. 339	 CYCLONE p. 343	 BOX p. 347	 DOCUS p. 349	 HEXO p. 351	 RAY p. 355					
 CORK p. 357	 BOX p. 363	 DOCUS p. 365	 HEXO p. 367	 RAY p. 369	 CORK p. 371	 CONE p. 373	 SELO p. 375	 ELLO p. 379					

WALL RECESSED p. 381 – 395						
 SMILE IN p. 383	 LITO p. 385	 EYE p. 387	 THEMIS p. 389	 STRANGE p. 391	 STRIPE p. 393	 ORIS p. 395



































WALL SURFACE p. 397 – 453													
 ROOMOR p. 35	 WIRO p. 67	 MIRRO p. 81	 DRO p. 93	 REVER p. 119	 J.J.W. p. 143	 VENN p. 399	 SMILE ON p. 403						
 SMILE p. 405	 BENTO p. 407	 BENTA p. 409	 MOON p. 411	 LEENS p. 413	 MIRBI LONG IP44 p. 415	 MIRBA IP44 p. 417	 CENTRAL p. 419						

MORE ON THE NEXT PAGE

INDOOR

 STATION p. 421	 TRAIN p. 423	 BOX MINI p. 427	 BOX p. 429	 DOCUS MINI p. 433	 HEXO MINI p. 435	 RAY MINI p. 437	 RAY p. 439	 INCH p. 443		
 MILES p. 445	 MILES p. 445	 MILES p. 449	 LIGHTDROP IP44 p. 451	 ARZY p. 453	TABLE			 ROOMOR p. 39	 WIRO p. 71	 MIRRO p. 85
 DRO p. 97	 DRO p. 99	 ROCK p. 109	 REVER p. 123	 REVER p. 127	FLOOR SURFACE			 ROOMOR p. 41	 WIRO p. 73	 MIRRO p. 87
 DRO p. 101	 DRO p. 101	 ROCK p. 109	 NAKED p. 113	 REVER p. 131						

OUTDOOR

CEILING RECESSED p. 457 – 459		 INTRA p. 459	CEILING SURFACE p. 461 – 475		 BLAS p. 463	 BLAS p. 463	 BOX p. 465	 RAY p. 469	 TUBE p. 471	 TUBE CARRÉ p. 473
 ROB p. 475		WALL RECESSED p. 477 – 485		 SMILE IN p. 479	 SMILE IN p. 479	 ORIS p. 481	 ORIS p. 481	 ATIM p. 483	 ATIM CARRÉ p. 485	
WALL SURFACE p. 487 – 527		 SMILE ON p. 489	 SMILE ON p. 489	 SMILE p. 491	 TAPE p. 493	 TUBE p. 495	 TUBE CARRÉ p. 499	 TUBE CARRÉ p. 501	 GETTON p. 503	
 CENTRAL p. 505	 STATION p. 507	 TRAIN p. 509	 TRAIN NARROW p. 513	 BOX p. 515	 BOXX p. 519	 RAY p. 521	 PALOS p. 523	 PALOS p. 525		
 X-BEAM p. 527	FLOOR RECESSED p. 529 – 539		 CARD p. 531	 MAP p. 533	 MAP ASYM p. 535	 CHART p. 537	 CHART ASYM p. 539	FLOOR SURFACE p. 541 – 569		 COSTA p. 543
 COSTA p. 545	 TAPE p. 549	 PACE p. 551	 GETTON p. 553	 LINUS p. 555	 EDGE p. 557	 PALLUZ C p. 559	 SMILE p. 561	 FIFTY FIFTY p. 563		
 SWAY p. 565	 PALOS p. 567	 PALOS p. 569	FLOOR PROJECTOR p. 571 – 579		 STIPO p. 573	 STAKE p. 575	 STAKE FOLD p. 577	 X-BEAM p. 579		

FROM BELGIUM WITH LOVE

LIGHT UP YOUR LIFE

Delicious fries prepared with love – that's what Belgium is famous for, right? Not exactly. For a while now, Belgium has also become known for trendy lights that not only look great, but also have compelling inner values. State-of-the-art LEDs that feel equally at home in a cosy attic apartment or in the hippest club in the city. Because they save space, preserve resources, and offer a higher quality of life. And that is exactly what we at Wever & Ducré want. Where do we get our inspiration? From people like you, who share our passion for beautiful things and who pay as much attention to great design as to high-quality products. Sounds good? Then keep reading. The newest highlights are waiting for you.

WIR BRINGEN SIE ZUM STRAHLEN

Köstliche und mit viel Liebe zubereitete Pommes – dafür ist Belgien berühmt. Stimmt's? Nicht ganz. Seit einiger Zeit steht Belgien auch für trendige Leuchten, die nicht nur toll aussehen, sondern auch mit inneren Werten punkten. LEDs der jüngsten Generation, die sich in einer kleinen Dachgeschoßwohnung ebenso wohlfühlen wie im angesagtesten Club der Stadt. Denn sie sparen Platz, schonen die Ressourcen und sorgen so ganz einfach für mehr Lebensqualität. Und genau das ist es auch, was wir von Wever & Ducré möchten. Von wem wir uns dabei inspirieren lassen? Von Menschen wie Ihnen, die unsere Begeisterung für schöne Dinge teilen und auf edles Design ebensoviel Wert legen wie auf eine hochwertige Verarbeitung. Klingt interessant? Dann blättern Sie doch einfach weiter. Die neuesten Hotspots warten schon auf Sie.



JUST COME OVER

HOMETOWN GLORY KORTRIJK

The moving boxes are unpacked, all the luminaires are mounted, and the coffee machine is running. The only thing still missing is you. Where? At our new headquarters in Kortrijk, of course, which are now open and ready for your visit. So save the address and head right over. This is the place where you can experience the latest collections up close and personal. And not just in our brand new showroom – you'll also find them in the best restaurants, cafés, and bars in town. No wonder the Broel Towers are trembling. After all, Kortrijk's famous attraction is now facing some fierce competition. The latest Wever & Ducré lighting trends easily outshine even the most beautiful medieval façade.

Die Umzugskartons sind ausgepackt, alle Leuchten montiert und die Kaffeemaschine läuft. Das Einzige, was jetzt noch fehlt, sind Sie. Wo? Natürlich in unserem neuen Headquarter in Kortrijk, das ab sofort für Sie geöffnet hat. Also gleich Adresse speichern und losfahren. Schließlich kann man die aktuellen Kollektionen hier hautnah erleben. Und das nicht nur in unserem nagelneuen Showroom – sondern auch in den besten Restaurants, Cafés und Bars der Stadt. Tja, kein Wunder, dass die Broeltürme zittern. Schließlich bekommen die berühmten Sehenswürdigkeiten jetzt mächtig Konkurrenz. Und zwar von den neuesten Wever & Ducré-Leuchtentrends, die selbst die schönste mittelalterliche Fassade locker überstrahlen.



SHOWROOM

WEVER&DUCRÉ
SHOWROOM
Spinnerijstraat 99/03
8500 Kortrijk
+32 56 49 28 00

REFERENCES

PARKHOTEL
HOTEL
Stationsplein 2
8500 Kortrijk
+32 56 22 03 03

BUDA KITCHEN
RESTAURANT
Budastraat 30
8500 Kortrijk
+32 56 32 13 98

**HUIS VAN DE
GROOTJUFFROUW**
BAR
Begijnhof 36
8500 Kortrijk
+32 49 87 61 624

BEUDAERT
RESTAURANT
Sint-Maartenskerkhof 8
8500 Kortrijk
+32 56 32 82 70



EXPLORE KORTRIJK
weverducre.com/kortrijk



THE WAY OF LIGHT



UP AND DOWN AND STRAIGHT AHEAD

“Light permeates everything in a way that is ethereal and invisible,” says Steffen Seeger, surveying his well-lit studio in Berlin. The artist from Berlin, best known for his multiple line drawings, was immediately intrigued by the idea of rendering this intangible aspect visually. So we invited him to Kortrijk to create a mural for us. Flowing, intuitively arranged lines that emanate like rays and waves form an energy field on the wall. “I wanted to capture the universal and all-enlivening energy of light with this landscape of overlapping oscillations,” says the artist. The image thereby leaves ample room for interpretation. There’s no better way to put light in the limelight.

HOCH, RUNTER UND GERADEAUS

„Licht durchströmt alles auf eine feinstoffliche und unsichtbare Weise“, sagt Steffen Seeger und blickt sich dabei in seinem hellen Studio in Berlin um. Die Idee, diesen nicht greifbaren Aspekt zu visualisieren, hat den Berliner Künstler, der mit seinen Multiple-Line-Drawings bekannt wurde, deshalb sofort fasziniert. Also haben wir ihn nach Kortrijk eingeladen, um für uns ein Mural zu gestalten. Fließende, intuitiv gesetzte Linien, die sich strahlen- und wellenförmig ausbreiten, haben auf der Wand ein Energiefeld geformt. „Mit dieser Landschaft aus sich überlagernden Schwingungen wollte ich die universelle und alles belebende Energie des Lichts einfangen“, sagt der Künstler. Damit lässt das Bild viel Raum für Deutungen offen. Schöner kann man Licht nicht in Szene setzen.

“The power of
intuition leads to
enlightenment.”

STEFFEN SEEGER



SIGNED, SEALED, AND DELIVERED

YOU'VE BEEN EXPECTING ME



... SO WHAT NOW?


Now that you've fallen head over heels in love with one of our luminaires, there's only one last thing you want – and that's to have it as soon as possible. We understand that all too well. That's why we do everything we can to ensure that your new treasure arrives in record time. Here's an example. If we receive an order by 2:30 pm, we can ship it the very next day, since we have nearly all our luminaires in stock. That way, nothing stands in the way of your first evening together.

... UND AB DIE POST

Sie haben sich Hals über Kopf in eine unserer Leuchten verliebt und möchten jetzt nur noch eines: sie so schnell wie möglich bei sich haben? Verstehen wir gut. Deshalb tun wir alles, um Ihren neuen Liebling im Rekordtempo zu Ihnen zu bringen. Kleines Beispiel gefällig? Erreicht uns eine Bestellung bis 14:30 Uhr, können wir sie – da wir fast alle unsere Leuchten lagernd haben – gleich am nächsten Tag versenden. So steht dem ersten gemeinsamen Abend nichts mehr im Wege.

“When I see something beautiful, I simply have to have it.”

YVES MARGINET
SALES AREA MANAGER

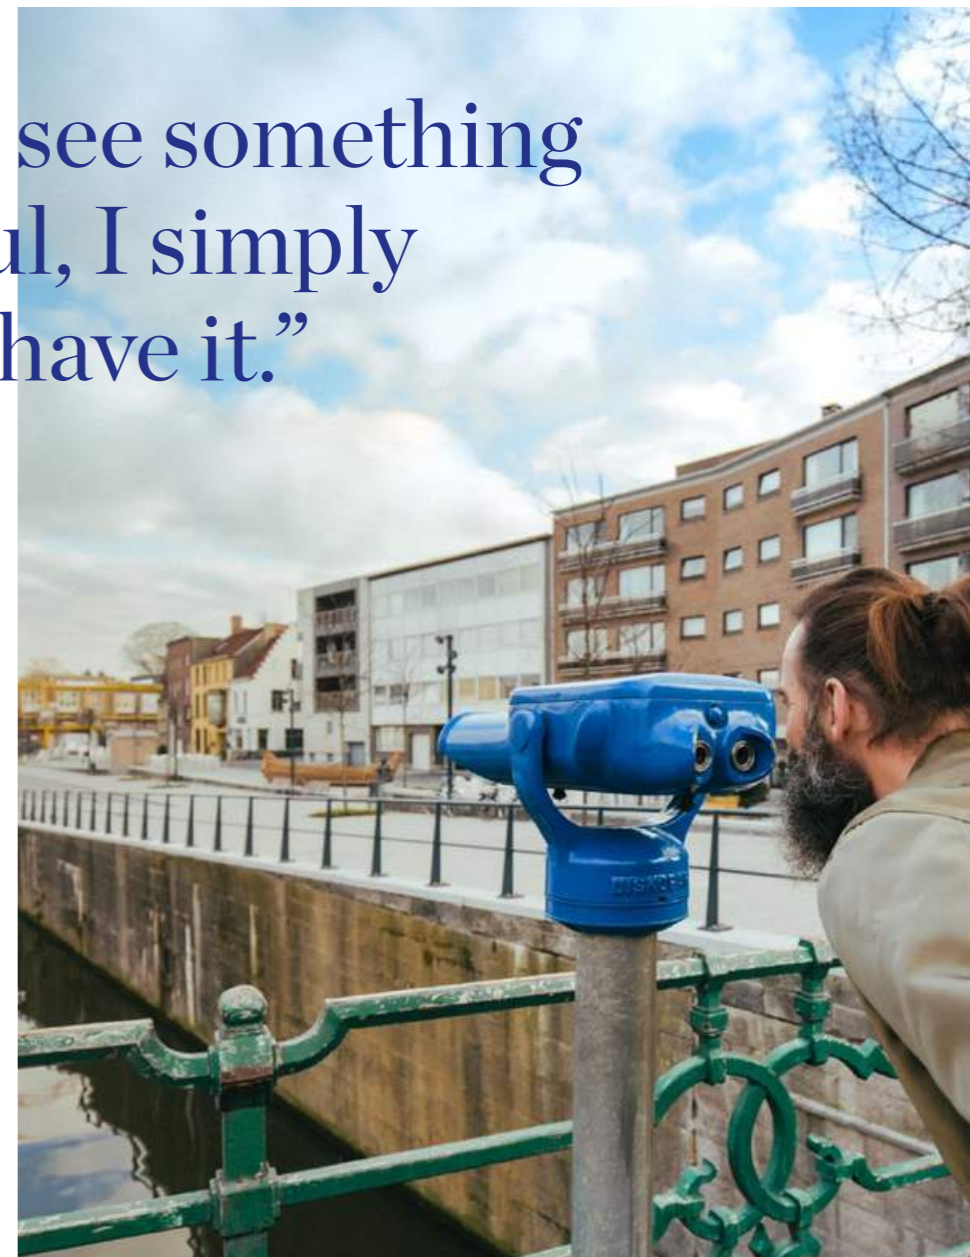

FROM DUSK TILL DAWN

RIGHT ATMOSPHERE AND MOOD



TURN IT HOWEVER YOU WANT

You can now set the right light for any mood with a simple twist. Do you want a chipper morning at 3000 K, or a romantic evening with a candlelight atmosphere at 1800 K? Either way, we have it covered! And the best thing is, the Ambient White Dim is available for nearly all of our lights. So you don't have to compromise on design. All you need is a three-wire cable, a phase cut dimmer, and one of our lights. Keep shining!

DREHN SIE'S, WIE SIE'S MÖCHTEN


Ab sofort können Sie im Handumdrehen genau die Lichtstimmung zaubern, die Ihnen gefällt. Ein munterer Morgen bei 3000 K oder lieber ein romantischer Abend mit Candlelight-Stimmung bei 1800 K? Kein Problem. Und das Beste: Das Ambient White Dim ist für fast alle unsere Leuchten erhältlich. Damit sind Ihnen in puncto Design keine Grenzen gesetzt. Alles, was Sie brauchen, sind ein 3-poliges Kabel, ein Phasenabschnittsdimmer und eine unserer Leuchten. Also keep shining!

GET YOURSELF

IN THE MOOD FOR

2700 K for
lunch

3000 K for
breakfast

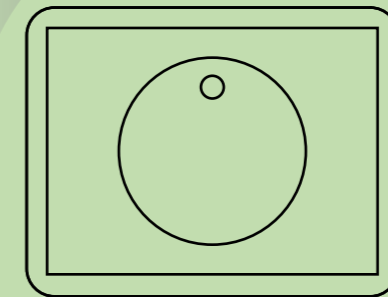

1800 K for
dinner

3000 K to 1800 K in
less than a second

IN

DOOR

DESIGNER FAMILIES

p. 23 – 147



**ROOMOR
CEILING 1.0**
p. 25



**ROOMOR
CEILING 2.0**
p. 27



**ROOMOR
SUSPENDED**
p. 29



**ROOMOR
WALL**
p. 31



**ROOMOR
TABLE**
p. 39



**ROOMOR
FLOOR**
p. 41



**WIRO
SUSPENSION
SYSTEM**
p. 45



**WIRO
WALL**
p. 67



**WIRO
TABLE**
p. 71



**WIRO
FLOOR**
p. 73



**ROCK
SUSPENDED**
p. 103



**ROCK
FLOOR**
p. 109



**ROCK
NAKED**
p. 113



**MIRRO
CEILING**
p. 77



**MIRRO
SUSPENDED**
p. 79



**MIRRO
WALL**
p. 81



**MIRRO
TABLE**
p. 85



**MIRRO
FLOOR**
p. 87



**REVER
SUSPENDED**
p. 117



**REVER
WALL**
p. 119



**REVER
TABLE**
p. 123



**REVER
DINING**
p. 127



**REVER
FLOOR**
p. 131



**DRO
CEILING**
p. 89



**DRO
SUSPENDED**
p. 91



**DRO
WALL**
p. 93



**DRO
TABLE**
p. 97



**DRO
TABLE**
p. 99



**DRO
FLOOR**
p. 101



**J.J.W.
SURFACE**
p. 137



**J.J.W.
SUSPENDED**
p. 139



**J.J.W.
WALL**
p. 143

A TRUE ALL-ROUNDER

ROOMOR HAS IT




MIX AND MATCH
weverducre.com/roomor

It's safe to believe the rumours: ROOMOR is a lamp that can change its appearance faster than a chameleon. And all it takes is a few simple steps. Just choose the shape and colour and combine them to your heart's content. As a result, ROOMOR can be transformed into everything from a minimalistic floor lamp to an opulent suspended luminaire to a discreet table lamp that can be used to create exceptional design accents at the office and beyond. And because ROOMOR is entirely adaptable to its surroundings when it comes to materials, all of the shade designs are offered in either brushed aluminium or finely textured felt. Nothing could be more flexible.

Sie können den Gerüchten ruhig glauben: ROOMOR ist eine Leuchte, die ihre Optik schneller wechselt als ein Chamäleon. Und das mit nur wenigen Handgriffen. Einfach Form und Farbe auswählen und loskombinieren. So wird aus ROOMOR mal eine minimalistische Stehlampe, mal eine opulente Hängeleuchte und mal eine dezente Tischlampe, mit der sich nicht nur im Büro schöne Design-Akzente setzen lassen. Und weil sich ROOMOR auch in puncto Material ganz ihrer Umgebung anpasst, sind alle Schirmformen entweder in gebürstetem Aluminium oder in fein strukturiertem Filz erhältlich. Flexibler geht's nicht.

MIX AND MATCH

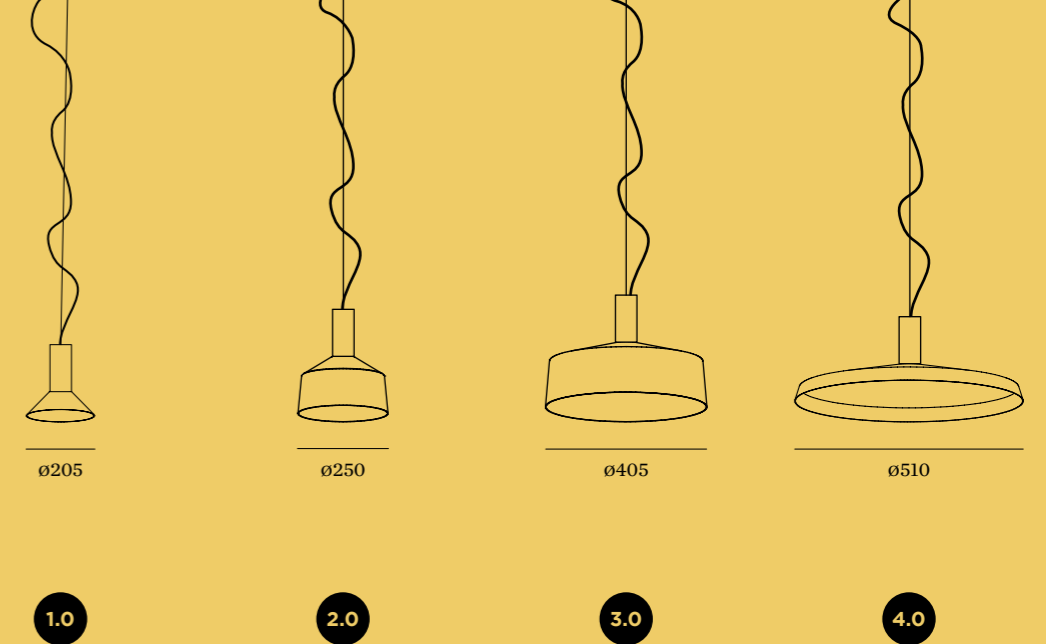


MATERIAL	ALUMINIUM	FELT	ALUMINIUM	FELT	ALUMINIUM	FELT	ALUMINIUM	FELT
CEILING								
1.0 PAR16	●●	●	●●	●	●●	●	●●	●
1.0 E27	●●	●	●●	●	●●	●	●●	●
2.0 PAR16	●●	●	●●	●	●●	●	●●	●
2.0 E27	●●	●	●●	●	●●	●	●●	●
SUSPENDED								
1.0 PAR16	●●●●	●	●●●●	●	●●●●	●	●●●●	●
1.0 E27	●●●●	●	●●●●	●	●●●●	●	●●●●	●
WALL								
1.0	●●●●	●						
2.0	●●	●	●●	●				
3.0	●●	●						
4.0	●●	●	●●	●	●●	●	●●	●
5.0	●●	●						
TABLE								
1.0	●●●●	●						
2.0	●●	●						
FLOOR								
1.0	●●	●	●●	●				

back



1.0



1.0 PAR16

PAR16 max. 35W | GU10
100-240VAC | 50-60Hz
wet painted aluminium
shade in felt grey max. 15W

1.10kg IP20 45°/45°

mounting only

CODE
168120B_

OPTIONAL


PAR16 LED GU10 7W phase-cut dim
2700K | 360lm

CODE
901228B3

more lamps and specs on page 593

extension tube

CODE
0.5m 90019192
1.0m 90019191



1.0 E27

QA60 max. 12W | E27
220-240VAC | 50-60Hz
wet painted aluminium
shade in felt grey max. 15W

1.10kg IP20 45°/45°

mounting only

CODE
1681E0B_

OPTIONAL

QA60 LED E27 9W dim

CODE
2800K | 810lm 9003E148

more lamps and specs on page 594

extension tube

CODE
0.5m 90019192
1.0m 90019191

OPTIONAL

shade 1.0

	CODE
	B1
	K1
	F1

shade 2.0

	CODE
	B2
	K2
	F2

shade 3.0

	CODE
	B3
	K3
	F3

shade 4.0

	CODE
	B4
	K4
	F4

no shade

	CODE
	00

overview on page 23



2.0



3.0



4.0



ROOMOR

CEILING SURFACE



1.0




2.0



3.0



4.0



2.0 PAR16

2x PAR16 max. 35W | GU10
100-240VAC | 50-60Hz
wet painted aluminium
shade in felt grey max. 15W

1.75kg IP20 45°/45°

mounting only

CODE	169120B_
------	----------

OPTIONAL


PAR16 LED GU10 7W phase-cut dim
2700K | 360lm

CODE	901228B3
------	----------

more lamps and specs on page 593

extension tube

CODE	90019192
0.5m	90019192
1.0m	90019191



2.0 E27

2x QA60 max. 12W | E27
220-240VAC | 50-60Hz
wet painted aluminium
shade in felt grey max. 15W

1.75kg IP20 45°/45°

mounting only

CODE	1691E0B_
------	----------

OPTIONAL

QA60 LED E27 9W dim
2800K | 810lm

CODE	9003E148
------	----------

more lamps and specs on page 594

extension tube

CODE	90019192
0.5m	90019192
1.0m	90019191

OPTIONAL

shade 1.0 | 2 shades included

CODE	B1
K1	
F1	felt

shade 2.0 | 2 shades included

CODE	B2
K2	
F2	felt

shade 3.0 | 2 shades included

CODE	B3
K3	
F3	felt

shade 4.0 | 2 shades included

CODE	B4
K4	
F4	felt

no shade

CODE	00
------	----

overview on page 23



2.0




1.0



3.0



4.0



1.0 PAR16

PAR16 max. 35W | GU10
100-240VAC | 50-60Hz
wet painted aluminium
incl. cable and ceiling base in
the same colour as the lamp body
shade in felt grey max. 15W

0.80kg IP20 0,9+D

mounting only

	CODE
	248120B _ _
	248120R _ _
	248120G _ _

6.0m suspension on page 607

OPTIONAL

PAR16 LED GU10 7W phase-cut dim
2700K | 360lm

	CODE
	901228W3
	901228B3

more lamps and specs on page 593

1.0 E27

QA60 max. 12W | E27
220-240VAC | 50-60Hz
wet painted aluminium
incl. cable and ceiling base in
the same colour as the lamp body
shade in felt grey max. 15W

0.80kg IP20 0,9+D

mounting only

	CODE
	2481E0B _ _
	2481E0R _ _
	2481E0G _ _

6.0m suspension on page 607

OPTIONAL

QA60 LED E27 9W dim

	CODE
2800K 810lm	9003E148

more lamps and specs on page 594

OPTIONAL

shade 1.0

	CODE
	B1
	K1
	R1
	G1
	F1

shade 2.0

	CODE
	B2
	K2
	R2
	G2
	F2

shade 3.0

	CODE
	B3
	K3
	R3
	G3
	F3

shade 4.0

	CODE
	B4
	K4
	R4
	G4
	F4

no shade



	CODE
	00

overview on page 23



ROOMOR

WALL SURFACE



2.0



1.0

1.0

PAR16 max. 35W | GU10
100-240VAC | 50-60Hz
wet painted steel and aluminium
shade in felt grey max. 15W

0.90kg IP20 45°/45°

mounting only

	CODE
	338120B__
	338120R__
	338120G__

OPTIONAL

shade 1.0

	CODE
	B1
	K1
	R1
	G1
felt	F1

no shade

	CODE
	00

overview on page 23

PAR16 LED GU10 7W phase-cut dim
2700K | 360lm

	CODE
	901228W3
	901228B3

more lamps and specs on page 593

2.0

PAR16 max. 35W | GU10
100-240VAC | 50-60Hz
wet painted steel and aluminium
shade in felt grey max. 15W

1.10kg IP20 45°/45°

mounting only

	CODE
	338220B__

OPTIONAL

shade 1.0

	CODE
	B1
	K1
felt	F1

shade 2.0

	CODE
	B2
	K2
felt	F2

no shade

	CODE
	00

overview on page 23

PAR16 LED GU10 7W phase-cut dim
2700K | 360lm

	CODE
	901228B3


more lamps and specs on page 593





ROOMOR

WALL SURFACE




3.0

PAR16 max. 35W | GU10
100-240VAC | 50-60Hz
wet painted aluminium
incl. cable with plug
shade in felt grey max. 15W


0.85kg IP20 45°/45° 30°/30°

mounting
cable plug with hand switch

CODE
339120B_



cable base round
CODE
339220B_




OPTIONAL

shade 1.0
CODE
B1
K1
felt F1

no shade
CODE
00

PAR16 LED GU10 7W phase-cut dim
2700K | 360lm
CODE
901228B3

more lamps and specs on page 593




4.0

PAR16 max. 35W | GU10
100-240VAC | 50-60Hz
wet painted aluminium
incl. cable with plug
shade in felt grey max. 15W


1.30kg IP20 45°/45° 30°/30°

mounting
cable plug with floor switch

CODE
339520B_



cable base round
CODE
339620B_




OPTIONAL

shade 1.0
CODE
B1
K1
felt F1

no shade
CODE
00

PAR16 LED GU10 7W phase-cut dim
2700K | 360lm
CODE
901228B3

more lamps and specs on page 593




5.0

PAR16 max. 35W | GU10
100-240VAC | 50-60Hz
wet painted steel and aluminium
incl. cable with plug
shade in felt grey max. 15W


1.45kg IP20 45°/45° 30°/30°

mounting
cable plug with hand switch

CODE
340120B_



cable base round
CODE
340220B_



OPTIONAL

shade 1.0
CODE
B1
K1
felt F1

no shade
CODE
00

PAR16 LED GU10 7W phase-cut dim
2700K | 360lm
CODE
901228B3

more lamps and specs on page 593

OPTIONAL

shade 2.0 for wall 4.0
CODE
B2
K2
felt F2

shade 3.0 for wall 4.0
CODE
B3
K3
felt F3

shade 4.0 for wall 4.0
CODE
B4
K4
felt F4


overview on page 23





ROOMOR

TABLE




1.0

PAR16 max. 35W | GU10
100-240VAC | 50-60Hz
wet painted steel and aluminium
incl. cable in the same colour as
the lamp body | black plug with
switch for black cable otherwise
transparent plug with switch
shade in felt grey max. 15W

3.40kg IP20 45°/45° 30°/30°

mounting
cable plug with hand switch

	CODE
	637120B
	637120R
	637120G



OPTIONAL

shade 1.0


	CODE
	B1
	K1
	R1
	G1
felt	F1

no shade

	CODE
	00

PAR16 LED GU10 7W phase-cut dim
2700K | 360lm

	CODE
	901228W3
	901228B3




2.0

PAR16 max. 35W | GU10
100-240VAC | 50-60Hz
wet painted steel and aluminium
incl. cable in the same colour as
the lamp body | black plug with
switch for black cable otherwise
transparent plug with switch
shade in felt grey max. 15W

4.50kg IP20 45°/45° 30°/30°

mounting
cable plug with hand switch

	CODE
	639120B



OPTIONAL

shade 1.0

	CODE
	B1
	K1
felt	F1

no shade



	CODE
	00

PAR16 LED GU10 7W phase-cut dim
2700K | 360lm

	CODE
	901228B3

more lamps and specs on page 593



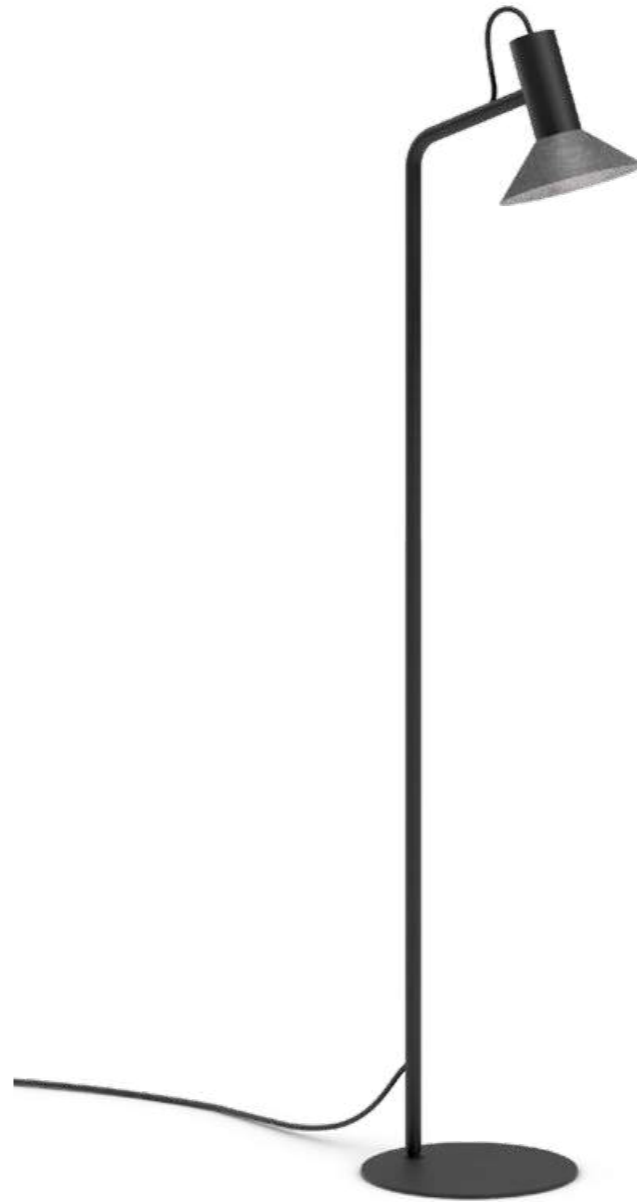


1.0

PAR16 max. 35W | GU10
 100-240VAC | 50-60Hz
 wet painted steel and aluminium
 incl. black cable plug with switch
 shade in felt grey max. 15W

5.60kg IP20 45°/45° 30°/30°

mounting
 cable plug with floor switch

CODE
 638120B



OPTIONAL

PAR16 LED GU10 7W phase-cut dim
 2700K | 360lm

CODE
 901228B3

more lamps and specs on page 593

OPTIONAL

shade 1.0
 CODE
 B1
 K1
 felt F1

shade 2.0
 CODE
 B2
 K2
 felt F2

no shade
 CODE
 00

overview on page 23



 **MIX AND MATCH**
 weverducre.com/wiro



DESIGNER

“Design is good if it brings something new and timeless to the world.”


BERND STEINHUBER

And with WIRO, Bernd Steinhuber has accomplished exactly that. What inspires the Austrian designer the most? Plainly said: Everything. Therefore, his little sketchbook is his constant companion. “Ideas are fleeting,” he says, “and they don’t stick to office hours.” That’s an attitude we truly admire. After all, the most beautiful things are often found when you are not looking for them. So keep your eyes open ...

Und das ist Bernd Steinhuber mit der WIRO auf jeden Fall gelungen. Wovon sich der 1972 geborene Designer am liebsten inspirieren lässt? Von allem, was ihm begegnet. Darum ist sein kleines Skizzenbuch auch sein steter Begleiter. „Ideen sind flüchtig und halten sich nicht an Bürozeiten.“ Eine Einstellung, die uns gut gefällt. Denn die schönsten Dinge findet man bekanntlich meist dann, wenn man nicht nach ihnen sucht. Also: Keep your eyes open!



WIRO
SUSPENSION SYSTEM





PLUG + PLAY

connector set for one lamp
incl. cable plug with dimmer
shade not included

CODE

90015165

cable plug with dimmer




DECENTER 1.0

connector set for one lamp
round ceiling base
shade not included

CODE

90052050

6.0m suspension on page 607




DECENTER 2.0

connector set for two lamps
round ceiling base
shade not included

CODE

90052055

6.0m suspension on page 607



DECENTER 3.0

connector set for three lamps
round ceiling base
shade not included

CODE

90052060

6.0m suspension on page 607



SUSPENSION

connector set for one lamp
round ceiling base | shade not included

with steel wire | 2.6m

CODE

90015175

with steel wire | 6.0m

90015176

no steel wire | 2.6m

90015171

no steel wire | 6.0m

90015172



WIRO

SHADES WITHOUT STEEL WIRE



1.0 CONE

☐ E27 max. 60W
220-240VAC | 50-60Hz
varnished steel | lacquered

☑ ☒ 1.00kg ☑-0,9-☐ IP20

shade only

	CODE
	245100V0
	245100B0

OPTIONAL

T30-225 LED E27 6W	CODE
2200K 450lm	9003E129
2700K 500lm	9003E136

T32-180 carbon filament E27 15W	CODE
2200K 50lm	9003E106

QA60 LED E27 6W	CODE
2200K 450lm	9003E109

QA60 carbon filament E27 15W	CODE
2200K 50lm	9003E124

more lamps and specs on page 594



2.0 WIRO

☐ QA60 max. 60W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

☑ ☒ 0.35kg ☑-0,9-☐ IP20


shade only

	CODE
	209600V0
	209600B0

OPTIONAL

QA60 LED E27 6W dim	CODE
2200K 400lm	9003E109
2700K 500lm	9003E138

QA60 carbon filament E27 15W	CODE
2200K 50lm	9003E124



1.8 WIRO

☐ QA60 max. 60W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

☑ ☒ 1.15kg ☑-0,9-☐ IP20

shade only

	CODE
	209200V0
	209200B0


OPTIONAL

QA60 carbon filament E27 15W	CODE
2200K 50lm	9003E124

T32-180 carbon filament E27 15W	CODE
2200K 50lm	9003E106

T30-225 LED E27 6W	CODE
2200K 450lm	9003E129
2700K 500lm	9003E136

more lamps and specs on page 594



3.8 WIRO

☐ QA60 max. 60W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

☑ ☒ 2.35kg ☑-0,9-☐ IP20

shade only

	CODE
	209300V0
	209300B0

OPTIONAL

QA60 LED E27 6W dim	CODE
2200K 400lm	9003E109
2700K 500lm	9003E138

QA60 carbon filament E27 15W	CODE
2200K 50lm	9003E124

T30-225 LED E27 6W	CODE
2200K 450lm	9003E129
2700K 500lm	9003E136

more lamps and specs on page 594

ALWAYS USE

Plug + Play | connector set for one lamp | incl. cable plug with dimmer

	CODE
	90015165

Decenter 1.0 | connector set for one lamp | round ceiling base

	CODE
	90052050

Decenter 2.0 | connector set for two lamps | round ceiling base

	CODE
	90052055

Decenter 3.0 | connector set for three lamps | round ceiling base

	CODE
	90052060

Suspension | connector set for one lamp | round ceiling base | no steel wire | 2.6m

	CODE
	90015171

Suspension | connector set for one lamp | round ceiling base | no steel wire | 6.0m

	CODE
	90015172


more information on page 45





WIRO

SHADES WITH STEEL WIRE



6.1 WIRO

QA60 max. 60W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

2.70kg | 0.9m | IP20

shade only

	CODE
	209400V0
	209400B0

OPTIONAL

QA60 LED E27 6W dim

	CODE
2200K 400lm	9003E109
2700K 500lm	9003E138


T30-300 LED E27 6W

	CODE
2200K 450lm	9003E130
2700K 500lm	9003E135

ST64 carbon filament E27 15W

	CODE
2200K 50lm	9003E105

more lamps and specs on page 594



6.5 WIRO

QA60 max. 60W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

3.85kg | 0.9m | IP20

shade only

	CODE
	209500V0
	209500B0

OPTIONAL

QA60 LED E27 6W dim

	CODE
2200K 400lm	9003E109
2700K 500lm	9003E138

T30-300 LED E27 6W

	CODE
2200K 450lm	9003E130
2700K 500lm	9003E135

T32-300 carbon filament E27 15W

	CODE
2200K 50lm	9003E127

more lamps and specs on page 594

ALWAYS USE

Plug + Play | connector set for one lamp | incl. cable plug with dimmer

	CODE
	90015165

Decenter 1.0 | connector set for one lamp | round ceiling base

	CODE
	90052050

Decenter 2.0 | connector set for two lamps | round ceiling base

	CODE
	90052055

Decenter 3.0 | connector set for three lamps | round ceiling base

	CODE
	90052060

Suspension | connector set for one lamp | round ceiling base | with steel wire | 2.6m

	CODE
	90015175

Suspension | connector set for one lamp | round ceiling base | with steel wire | 6.0m


	CODE
	90015176

more information on page 45



WIRO

SHADES WITH STEEL WIRE



1.0 DIAMOND

E27 max. 60W
220-240VAC | 50-60Hz
varnished steel | lacquered

2.90kg | IP20

shade only

	CODE
	229100P0
	229100B0

OPTIONAL


T30-300 LED E27 6W

	CODE
2200K 450lm	9003E130
2700K 500lm	9003E135

T32-300 carbon filament E27 15W

	CODE
2200K 50lm	9003E127

more lamps and specs on page 596



1.1 DIAMOND

E27 max. 60W
220-240VAC | 50-60Hz
varnished steel | lacquered

2.00kg | IP20

shade only

	CODE
	244100P0
	244100B0

OPTIONAL

T30-300 LED E27 6W

	CODE
2200K 450lm	9003E130
2700K 500lm	9003E135

T32-300 carbon filament E27 15W

	CODE
2200K 50lm	9003E127

more lamps and specs on page 596

ALWAYS USE

Plug + Play | connector set for one lamp | incl. cable plug with dimmer

	CODE
	90015165

Decenter 1.0 | connector set for one lamp | round ceiling base

	CODE
	90052050

Decenter 2.0 | connector set for two lamps | round ceiling base

	CODE
	90052055

Decenter 3.0 | connector set for three lamps | round ceiling base

	CODE
	90052060

Suspension | connector set for one lamp | round ceiling base | with steel wire | 2.6m

	CODE
	90015175

Suspension | connector set for one lamp | round ceiling base | with steel wire | 6.0m

	CODE
	90015176

more information on page 45




AIRBASE HOTEL | STUDIO WG3 & ZT GELDNER | CHRISTINA ZETTL GRAZ | AUSTRIA





As awarded by The Chicago Athenaeum:
Museum of Architecture and Design



2.0 DIAMOND

E27 max. 60W
220-240VAC | 50-60Hz
varnished steel | lacquered

5.70kg ±0,9 IP20

shade only

	CODE
	229200P0
	229200B0

OPTIONAL


T30-300 LED E27 6W

	CODE
2200K 450lm	9003E130
2700K 500lm	9003E135

T32-300 carbon filament E27 15W

	CODE
2200K 50lm	9003E127

more lamps and specs on page 596



3.0 DIAMOND

E27 max. 60W
220-240VAC | 50-60Hz
varnished steel | lacquered

6.50kg ±0,9 IP20

shade only

	CODE
	229300P0
	229300B0

OPTIONAL


T30-300 LED E27 6W

	CODE
2200K 450lm	9003E130
2700K 500lm	9003E135

T32-300 carbon filament E27 15W

	CODE
2200K 50lm	9003E127

more lamps and specs on page 596



4.0 DIAMOND

E27 max. 60W
220-240VAC | 50-60Hz
varnished steel | lacquered

6.00kg ±0,9 IP20

shade only

	CODE
	229400P0
	229400B0

OPTIONAL

T30-300 LED E27 6W

	CODE
2200K 450lm	9003E130
2700K 500lm	9003E135

T32-300 carbon filament E27 15W

	CODE
2200K 50lm	9003E127

more lamps and specs on page 596

WIRO

SHADES WITH STEEL WIRE

ALWAYS USE


Suspension | connector set for one lamp | round ceiling base | with steel wire | 2.6m

	CODE
	90015175

Suspension | connector set for one lamp | round ceiling base | with steel wire | 6.0m

	CODE
	90015176

more information on page 45



back





WIRO

SHADES WITH STEEL WIRE



1.0 INDUSTRY

E27 max. 60W
220-240VAC | 50-60Hz
varnished steel | lacquered

3.00kg ±0,9-1 IP20

shade only

	CODE
	230100T0
	230100B0

OPTIONAL

T30-300 LED E27 6W

	CODE
2200K 450lm	9003E130
2700K 500lm	9003E135


T32-300 carbon filament E27 15W

	CODE
2200K 50lm	9003E127

T32-180 carbon filament E27 15W

	CODE
2200K 50lm	9003E106

more lamps and specs on page 596



2.0 GLOBE

E27 max. 60W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

3.80kg ±0,9-1 IP20

shade only

	CODE
	228200B0

OPTIONAL


QA60 LED E27 6W dim

	CODE
2200K 400lm	9003E109
2700K 500lm	9003E138

T30-300 LED E27 6W

	CODE
2200K 450lm	9003E130
2700K 500lm	9003E135

more lamps and specs on page 594



3.0 GLOBE

QA60 max. 60W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

2.30kg ±0,9-1 IP20

shade only

	CODE
	228300W0
	228300B0

OPTIONAL

QA60 LED E27 6W dim

	CODE
2200K 400lm	9003E109
2700K 500lm	9003E138

ST64 LED E27 6W

	CODE
2200K 450lm	9003E110

more lamps and specs on page 594

ALWAYS USE

Plug + Play | connector set for one lamp | incl. cable plug with dimmer

	CODE
	90015165

Decenter 1.0 | connector set for one lamp | round ceiling base

	CODE
	90052050

Decenter 2.0 | connector set for two lamps | round ceiling base

	CODE
	90052055

Decenter 3.0 | connector set for three lamps | round ceiling base

	CODE
	90052060


Suspension | connector set for one lamp | round ceiling base | with steel wire | 2.6m

	CODE
	90015175

Suspension | connector set for one lamp | round ceiling base | with steel wire | 6.0m

	CODE
	90015176

more information on page 45



4.0 GLOBE

E27 max. 60W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

1.30kg ±0,9 IP20

shade only

	CODE
	243100W0
	243100V0
	243100B0

OPTIONAL

T30-225 LED E27 6W	CODE
2200K 450lm	9003E129
2700K 500lm	9003E136

T32-180 carbon filament E27 15W	CODE
2200K 50lm	9003E106

more lamps and specs on page 596



5.0 GLOBE

E27 max. 60W
220-240VAC | 50-60Hz
varnished steel | lacquered

2.70kg ±0,9 IP20

shade only


	CODE
	243200W0
	243200V0
	243200B0

OPTIONAL

T30-300 LED E27 6W	CODE
2200K 450lm	9003E130
2700K 500lm	9003E135

T32-300 carbon filament E27 15W	CODE
2200K 50lm	9003E127

more lamps and specs on page 596



6.0 GLOBE

E27 max. 60W
220-240VAC | 50-60Hz
varnished steel | lacquered

3.30kg ±0,9 IP20

shade only

	CODE
	243300W0
	243300V0
	243300B0

OPTIONAL

T30-300 LED E27 6W	CODE
2200K 450lm	9003E130
2700K 500lm	9003E135

T32-300 carbon filament E27 15W	CODE
2200K 50lm	9003E127

more lamps and specs on page 596

ALWAYS USE

Plug + Play | connector set for one lamp | incl. cable plug with dimmer

	CODE
	90015165

Decenter 1.0 | connector set for one lamp | round ceiling base

	CODE
	90052050

Decenter 2.0 | connector set for two lamps | round ceiling base

	CODE
	90052055

Decenter 3.0 | connector set for three lamps | round ceiling base

	CODE
	90052060

Suspension | connector set for one lamp | round ceiling base | with steel wire | 2.6m

	CODE
	90015175

Suspension | connector set for one lamp | round ceiling base | with steel wire | 6.0m



	CODE
	90015176

more information on page 45



WIRO

SHADES WITH STEEL WIRE



2.0 INDUSTRY

E27 max. 60W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

4.50kg 8-0.9-D IP20

shade only

	CODE
	23020000
	230200B0

OPTIONAL

T30-300 LED E27 6W

	CODE
2200K 450lm	9003E130
2700K 500lm	9003E135

T32-300 carbon filament E27 15W

	CODE
2200K 50lm	9003E107

more lamps and specs on page 596

1.0 GLOBE

E27 max. 60W | E27
220-240VAC | 50-60Hz
varnished steel | lacquered

5.20kg 8-0.9-D IP20

shade only

	CODE
	228100W0
	228100R0
	228100B0

OPTIONAL

T30-300 LED E27 6W

	CODE
2200K 450lm	9003E130
2700K 500lm	9003E135

QA60 LED E27 6W dim

	CODE
2200K 450lm	9003E109
2700K 500lm	9003E138

more lamps and specs on page 596

ALWAYS USE


Suspension | connector set for one lamp | round ceiling base | with steel wire | 2.6m

	CODE
	90015175

Suspension | connector set for one lamp | round ceiling base | with steel wire | 6.0m

	CODE
	90015176

more information on page 45




1.0 CONE

E27 max. 60W
220-240VAC | 50-60Hz
varnished steel | lacquered

1.45kg IP20

	CODE
	3341E8VBO
	3341E8BBO




1.1 CONE

E27 max. 60W
220-240VAC | 50-60Hz
varnished steel | lacquered
incl. cable plug with dimmer

1.65kg IP20

	CODE
	3342E8VBO
	3342E8BBO

cable plug with dimmer



OPTIONAL

T30-225 LED E27 6W

	CODE
2200K 450lm	9003E129
2700K 500lm	9003E136

T32-180 carbon filament E27 15W

2200K 50lm	9003E106
--------------	----------

QA60 LED E27 6W

2200K 450lm	9003E109
---------------	----------

QA60 carbon filament E27 15W

2200K 50lm	9003E124
--------------	----------

more lamps and specs on page 594

OPTIONAL

T30-225 LED E27 6W

	CODE
2200K 50lm	9003E129
2700K 500lm	9003E136

T32-180 carbon filament E27 15W

2200K 50lm	9003E106
--------------	----------


QA60 LED E27 6W

2200K 450lm	9003E109
---------------	----------

QA60 carbon filament E27 15W

2200K 50lm	9003E124
--------------	----------

more lamps and specs on page 594




1.0 DIAMOND

E27 max. 60W
220-240VAC | 50-60Hz
varnished steel | lacquered

2.45kg IP20

CODE	
	3351E8PBO
	3351E8BBO




1.1 DIAMOND

E27 max. 60W
220-240VAC | 50-60Hz
varnished steel | lacquered
incl. cable plug with dimmer

2.45kg IP20

CODE	
	3352E8PBO
	3352E8BBO

cable plug with dimmer



OPTIONAL


T30-225 LED E27 6W

CODE	
2200K 450lm	9003E129
2700K 500lm	9003E136

T32-180 carbon filament E27 15W

2200K 50lm	9003E106
--------------	----------

more lamps and specs on page 596



1.0 GLOBE

E27 max. 60W
220-240VAC | 50-60Hz
varnished steel | lacquered

1.95kg IP20

CODE	
	3353E8WBO
	3353E8VBO
	3353E8BBO

OPTIONAL


T30-225 LED E27 6W

CODE	
2200K 450lm	9003E129
2700K 500lm	9003E136

T32-180 carbon filament E27 15W

2200K 50lm	9003E106
--------------	----------

more lamps and specs on page 596




1.1 GLOBE

E27 max. 60W
220-240VAC | 50-60Hz
varnished steel | lacquered
incl. cable plug with dimmer

1.95kg IP20

CODE	
	3354E8WBO
	3354E8VBO
	3354E8BBO

cable plug with dimmer



OPTIONAL

T30-225 LED E27 6W

CODE	
2200K 450lm	9003E129
2700K 500lm	9003E136

T32-180 carbon filament E27 15W


2200K 50lm	9003E106
--------------	----------

more lamps and specs on page 596



WIRO

TABLE




1.0 DIAMOND

☐ E27 max. 60W
220-240VAC | 50-60Hz
varnished steel | lacquered
incl. cable plug with dimmer

📦 2.90kg 📏 IP20

CODE	
	6603ESPBO
	6603EBBBO

cable plug with dimmer




OPTIONAL

T30-225 LED E27 6W

CODE	
2200K 450lm	9003E129
2700K 500lm	9003E136

T32-180 carbon filament E27 15W
2200K | 50lm 9003E106

more lamps and specs on page 596




1.0 GLOBE

☐ E27 max. 60W
220-240VAC | 50-60Hz
varnished steel | lacquered
incl. cable plug with dimmer

📦 2.20kg 📏 IP20

CODE	
	6601ESWBO
	6601ESVBO
	6601EBBBO

cable plug with dimmer




OPTIONAL

T30-225 LED E27 6W

CODE	
2200K 450lm	9003E129
2700K 500lm	9003E136

T32-180 carbon filament E27 15W
2200K | 50lm 9003E106

more lamps and specs on page 596




2.0 GLOBE

☐ E27 max. 60W
220-240VAC | 50-60Hz
varnished steel | lacquered
incl. cable plug with dimmer

📦 3.20kg 📏 IP20

CODE	
	6602ESWBO
	6602ESVBO
	6602EBBBO

cable plug with dimmer



OPTIONAL



T30-300 LED E27 6W

CODE	
2200K 450lm	9003E130
2700K 500lm	9003E135

T32-300 carbon filament E27 15W
2200K | 50lm 9003E127

more lamps and specs on page 596



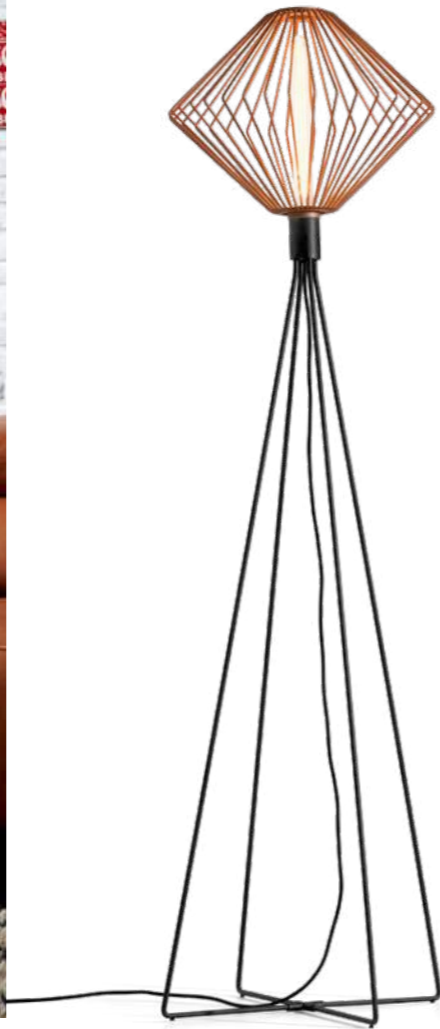


DIAMOND 1.0

E27 max. 60W
220-240VAC | 50-60Hz
varnished steel | lacquered
incl. cable plug with dimmer

5.40kg IP20

CODE	
	6614ESPBO
	6614ESBBO

cable plug with dimmer



OPTIONAL


T30-225 LED E27 6W

CODE	
2200K 450lm	9003E129
2700K 500lm	9003E136

T32-180 carbon filament E27 15W

2200K 50lm	9003E106
--------------	----------

more lamps and specs on page 596




GLOBE 1.0

E27 max. 60W
220-240VAC | 50-60Hz
varnished steel | lacquered
incl. cable plug with dimmer

6.10kg IP20

CODE	
	6611E8WBO
	6611E8VBO
	6611E8BBO

cable plug with dimmer



OPTIONAL


T30-225 LED E27 6W

CODE	
2200K 450lm	9003E130
2700K 500lm	9003E136

T32-300 carbon filament E27 15W

2200K 50lm	9003E107
--------------	----------

more lamps and specs on page 596




GLOBE 2.0

E27 max. 60W
220-240VAC | 50-60Hz
varnished steel | lacquered
incl. cable plug with dimmer

6.70kg IP20

CODE	
	6612E8WBO
	6612E8VBO
	6612E8BBO

cable plug with dimmer



OPTIONAL

T30-300 LED E27 6W

CODE	
2200K 450lm	9003E135
2700K 500lm	9003E135

T32-300 carbon filament E27 15W

2200K 50lm	9003E127
--------------	----------

more lamps and specs on page 596



DESIGNER

“We want to instill soul, to imbue products with emotional added value.”

ANASTASIA SU & MARTIN LESJAK, 13&9 DESIGN

Anastasia Su and Martin Lesjak from the studio 13&9 are completely focused on “transferring the creative energy of a brand to the product itself”. This approach is also reflected in the three collections that the Austrian design team has created exclusively for Wever & Ducré.

First and foremost: the natural shale veneer of ROCK with its expressive character and varying degrees of transparency, which makes every luminaire completely unique. And DRO, for which the two designers have succeeded in permanently capturing the fleeting beauty of a dewdrop. “We dealt intensively with the so-called hydrophobic effect when designing this luminaire,” explains Anastasia Su. “It causes water to bead off or adhere to the surface, thus creating nestling or upright shapes – an aesthetic that made a special impression on us.” Besides finding inspiration in nature, 13&9 also draws upon an abundance of other creative realms such as art, fashion, and architecture – a transdisciplinary approach that is articulated so eloquently in the MIRRO collection designed by Sabrina Stadlober. Both the beholder and the surroundings can be mirrored simultaneously in the reflective metallic surface of the luminaires. A masterful technique that 13&9 employs to create an intense connection between user and product. And that is exactly what makes all of the pieces designed by 13&9 so fascinating.

Anastasia Su und Martin Lesjak vom Studio 13&9 konzentrieren sich ganz darauf, „die kreative Energie einer Marke auf das Produkt zu übertragen“. Dieser Ansatz spiegelt sich auch in den insgesamt drei Kollektionen wider, die das österreichische Designerteam exklusiv für Wever & Ducré entworfen hat. Allen voran: die charakterstarke ROCK, deren unterschiedlich transparentes Schieferfurnier jede Leuchte zu einem absoluten Unikat macht. Aber auch die DRO, mit der es den beiden Designern gelungen ist, die flüchtige Schönheit eines Tautropfens dauerhaft einzufangen. „Für diese Leuchte haben wir uns intensiv mit dem sogenannten hydrophoben Effekt auseinandergesetzt.“, erklärt Anastasia Su. „Er bewirkt, dass Wasser abperlt oder anhaftet, und lässt dadurch sich anschmiegende oder stehende Formen entstehen. Eine Ästhetik, die uns besonders beeindruckt hat.“

Inspirieren lassen sich 13&9 aber nicht nur von der Natur, sondern auch von vielen anderen Kreativbereichen wie Kunst, Mode oder Architektur. Eine transdisziplinäre Herangehensweise, die bei der mit Designerin Sabrina Stadlober entworfenen Kollektion MIRRO besonders schön zum Ausdruck kommt. Gleichzeitig können sich Betrachter und Umgebung in der metallisch-reflektierenden Oberfläche der Leuchten spiegeln. Ein gekonnter Kunstgriff, mit dem 13&9 eine intensive Verbindung zwischen Benutzer und Produkt herstellen. Und genau das ist es auch, was die besondere Faszination aller von 13&9 entworfenen Objekte ausmacht.




HAVE A LOOK
weverducre.com/dro




MORE INFOS
weverducre.com/mirro






CURIOUS?
weverducre.com/rock




back



MIRRO
CEILING SURFACE

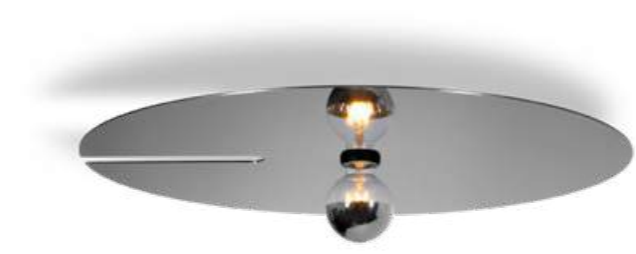

1.0


☞ QA60 max. 15W | E27
aluminium | steel powder coated
aluminium composite panel

☑ 0.70kg ± IP20

	CODE
	6321E8GB0
	6321E8NB0

OPTIONAL

QA60 LED E27 6W 500lm 2700K	CODE
gold mirror	9003E139
silver mirror	9003E140



2.0


☞ LED G95 max. 15W | E27
aluminium | steel powder coated
aluminium composite panel

☑ 1.00kg ± IP20

	CODE
	6322E8GB0
	6322E8NB0

OPTIONAL

G95 LED E27 6W 500lm 2700K	CODE
gold mirror	9003E142
silver mirror	9003E149



3.0


☞ LED G95 max. 15W | E27
aluminium | steel powder coated
aluminium composite panel

☑ 2.10kg ± IP20

	CODE
	6323E8GB0
	6323E8NB0

OPTIONAL

G95 LED E27 6W 500lm 2700K	CODE
gold mirror	9003E142
silver mirror	9003E149





MIRRO

CEILING SUSPENDED



1.0

☞ QA60 max. 15W | E27
aluminium | steel powder coated
aluminium composite panel

☑ ☒ 0.70kg ⊕ IP20

2.5m

	CODE
	6341E8GB0
	6341E8NB0


6.0m

	CODE
	6344E8GB0
	6344E8NB0

OPTIONAL

QA60 LED E27 6W 500lm 2700K

	CODE
gold mirror	9003E139
silver mirror	9003E140



2.0

☞ LED G95 max. 15W | E27
aluminium | steel powder coated
aluminium composite panel

☑ ☒ 1.00kg ⊕ IP20

2.5m

	CODE
	6342E8GB0
	6342E8NB0


6.0m

	CODE
	6345E8GB0
	6345E8NB0

OPTIONAL

G95 LED E27 6W 500lm 2700K

	CODE
gold mirror	9003E142
silver mirror	9003E149



3.0

☞ LED G95 max. 15W | E27
aluminium | steel powder coated
aluminium composite panel

☑ ☒ 2.10kg ⊕ IP20

2.5m

	CODE
	6343E8GB0
	6343E8NB0

6.0m

	CODE
	6346E8GB0
	6346E8NB0

OPTIONAL


G95 LED E27 6W 500lm 2700K

	CODE
gold mirror	9003E142
silver mirror	9003E149



MIRRO

WALL SURFACE




1.0 EXTENDED

QA60 max. 15W | E27
aluminium | steel powder coated
aluminium composite panel
incl. cable plug with dimmer

0.70kg IP20

	CODE
	6331E8GBO
	6331E8NBO


cable plug with dimmer



OPTIONAL

QA60 LED E27 6W 500lm 2700K

	CODE
gold mirror	9003E139
silver mirror	9003E140



1.0

QA60 max. 15W | E27
aluminium | steel powder coated
aluminium composite panel


0.70kg IP20

	CODE
	6321E8GBO
	6321E8NBO

OPTIONAL

QA60 LED E27 6W 500lm 2700K

	CODE
gold mirror	9003E139
silver mirror	9003E140



2.0

LED G95 max. 15W | E27
aluminium | steel powder coated
aluminium composite panel


1.00kg IP20

	CODE
	6322E8GBO
	6322E8NBO

OPTIONAL

G95 LED E27 6W 500lm 2700K

	CODE
gold mirror	9003E142
silver mirror	9003E149



3.0

LED G95 max. 15W | E27
aluminium | steel powder coated
aluminium composite panel

2.10kg IP20

	CODE
	6323E8GBO
	6323E8NBO

OPTIONAL

G95 LED E27 6W 500lm 2700K


	CODE
gold mirror	9003E142
silver mirror	9003E149





MIRRO

TABLE




1.0

QA60 max. 15W | E27
aluminium | steel powder coated
aluminium composite panel
incl. cable plug with dimmer

1.30kg IP20

	CODE
	6301E8GBO
	6301E8NBO

cable plug with dimmer



OPTIONAL

QA60 LED E27 6W 500lm 2700K

	CODE
gold mirror	9003E139
silver mirror	9003E140





back

ME



MIRRO
FLOOR SURFACE




2.0

LED G95 max. 15W | E27
aluminium | steel powder coated
aluminium composite panel
incl. cable plug with floor switch

3.30kg IP20

	CODE
	6311E8GB0
	6311E8NB0

cable plug with floor switch



OPTIONAL

G95 LED E27 6W 500lm 2700K

	CODE
gold mirror	9003E142
silver mirror	9003E149


3.0

LED G95 max. 15W | E27
aluminium | steel powder coated
aluminium composite panel
incl. cable plug with floor switch

3.70kg IP20

	CODE
	6312E8GB0
	6312E8NB0

cable plug with floor switch



OPTIONAL

G95 LED E27 6W 500lm 2700K

	CODE
gold mirror	9003E142
silver mirror	9003E149



DRO




CEILING SURFACE



BROWN OPAL GLASS
ON



BROWN OPAL GLASS
OFF



1.0

LED QT14 max. 3W | G9
220-240VAC | 50-60Hz
white/brown opal glass hand blown
aluminium powder coated

0.60kg IP20

	CODE
	1721G0WB0
	1721G0YB0

OPTIONAL

QT14 LED opal 2.6W

	CODE
2700K 170lm	9019G706

more lamps and specs on page 595

2.0

LED C35 max. 6W | E14
220-240VAC | 50-60Hz
white/brown opal glass hand blown
aluminium powder coated

1.20kg IP20

	CODE
	1722C0WB0
	1722C0YB0

OPTIONAL

C35 LED E14 6W opal dim

	CODE
2700K 470lm	9003C101

more lamps and specs on page 595

3.0

QA60 max. 12W | E27
220-240VAC | 50-60Hz
white/brown opal glass hand blown
aluminium powder coated

2.70kg IP20

	CODE
	1723E0WB0
	1723E0YB0

OPTIONAL


QA60 LED E27 9W dim

	CODE
2800K 810lm	9003E148

more lamps and specs on page 594



DRO
CEILING SUSPENDED



1.0

LED QT14 max. 3W | G9
220-240VAC | 50-60Hz
white/brown opal glass hand blown
aluminium + steel powder coated
black textile cable

0.70kg IP20


CODE	
	2521G0WB0
	2521G0YB0

OPTIONAL

QT14 LED opal 2.6W

CODE	
2700K 170lm	9019G706

more lamps and specs on page 595



2.0

LED C35 max. 6W | E14
220-240VAC | 50-60Hz
white/brown opal glass hand blown
aluminium + steel powder coated
black textile cable

1.30kg IP20


CODE	
	2522C0WB0
	2522C0YB0

OPTIONAL

C35 LED E14 6W opal dim

CODE	
2700K 470lm	9003C101

more lamps and specs on page 595



3.0

QA60 max. 12W | E27
220-240VAC | 50-60Hz
white/brown opal glass hand blown
aluminium + steel powder coated
black textile cable

2.70kg IP20


CODE	
	2523E0WB0
	2523E0YB0

OPTIONAL

QA60 LED E27 9W dim

CODE	
2800K 810lm	9003E148

more lamps and specs on page 594



4.0

QA60 max. 15W | E27
220-240VAC | 50-60Hz
white/brown opal glass hand blown
aluminium + steel powder coated
black textile cable

4.10kg IP20




CODE	
	2524E0WB0
	2524E0YB0

OPTIONAL

QA60 LED E27 13W dim

CODE	
2700K 1520lm	9003E131

more lamps and specs on page 594



1.0

LED QT14 max. 3W | G9
220-240VAC | 50-60Hz
white/brown opal glass hand blown
aluminium powder coated

0.60kg IP44

CODE	
	3431GOWO
	3431GOYO

OPTIONAL

QT14 LED opal 2.6W

CODE	
2700K 170lm	9019G706

more lamps and specs on page 595

2.0

LED C35 max. 6W | E14
220-240VAC | 50-60Hz
white/brown opal glass hand blown
aluminium powder coated

1.20kg IP44

CODE	
	3432COWO
	3432COYO

OPTIONAL

C35 LED E14 6W opal dim

CODE	
2700K 470lm	9003C101

more lamps and specs on page 595


1.0 COMP

LED QT14 max. 3W | G9
220-240VAC | 50-60Hz
white/brown opal glass hand blown
aluminium powder coated
black textile cable | incl. cable
plug with dimmer

2.50kg IP20

CODE	
	3441GOWBO
	3441GOYBO

cable plug with dimmer






OPTIONAL

QT14 LED opal 2.6W

CODE	
2700K 170lm	9019G706

more lamps and specs on page 595






1.0

LED QT14 max. 3W | G9
220-240VAC | 50-60Hz
white/brown opal glass hand blown
aluminium powder coated | black
textile cable incl. cable plug with
hand switch

0.75kg IP20

CODE
6421G0WBO
6421G0YBO

cable plug with switch



OPTIONAL

QT14 LED opal 2.6W

2700K | 170lm
9019G706

more lamps and specs on page 595


2.0

LED C35 max. 6W | E14
220-240VAC | 50-60Hz
white/brown opal glass hand blown
aluminium powder coated | black
textile cable incl. cable plug with
dimmer

1.30kg IP20

CODE
6422C0WBO
6422C0YBO

cable plug with dimmer



OPTIONAL

C35 LED E14 6W opal dim

2700K | 470lm
9003C101

more lamps and specs on page 595


3.0

QA60 max. 12W | E27
220-240VAC | 50-60Hz
white/brown opal glass hand blown
aluminium powder coated | black
textile cable incl. cable plug with
dimmer

2.30kg IP20

CODE
6423E0WBO
6423E0YBO

cable plug with dimmer




OPTIONAL

QA60 LED E27 9W dim

2800K | 810lm
9003E148

more lamps and specs on page 594



2.0

LED C35 max. 6W | E14
220-240VAC | 50-60Hz
opal glass hand blown | aluminium
steel powder coated | black textile
cable | incl. cable plug with
dimmer

2.30kg IP20

CODE
6432COWBO
6432COYBO

cable plug with dimmer




OPTIONAL

C35 LED E14 6W opal dim

2700K | 470lm CODE 9003C101

more lamps and specs on page 595




3.0

QA60 max. 12W | E27
220-240VAC | 50-60Hz
opal glass hand blown | aluminium
steel powder coated | black textile
cable | incl. cable plug with
dimmer

3.30kg IP20

CODE
6433EOWBO
6433EOYBO

cable plug with dimmer



OPTIONAL

QA60 LED E27 9W dim




2800K | 810lm CODE 9003E148

more lamps and specs on page 594





DRO
FLOOR SURFACE

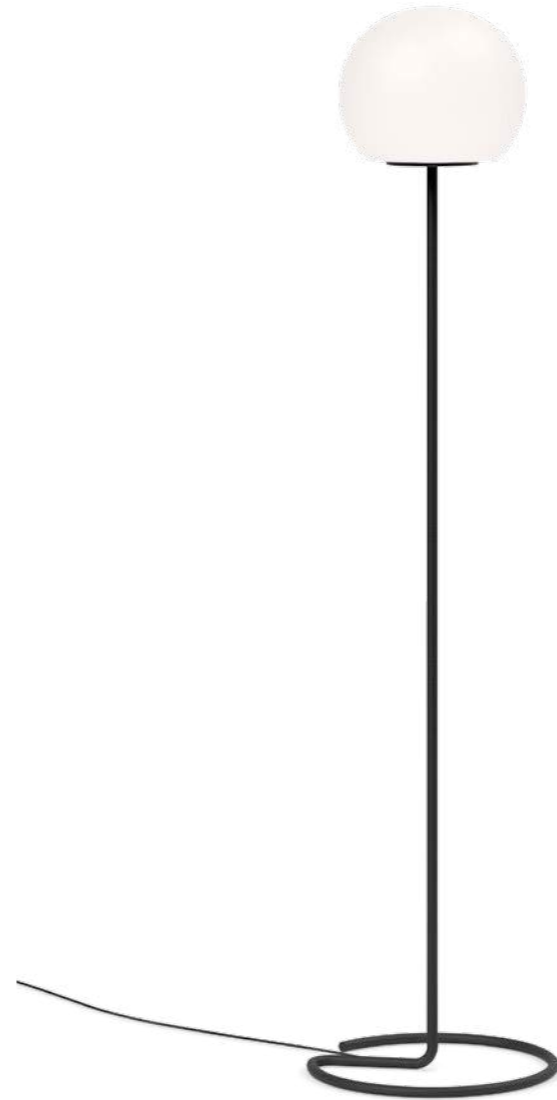


3.0

☛ QA60 max. 12W | E27
220-240VAC | 50-60Hz
opal glass hand blown | aluminium
steel powder coated | black
textile cable | incl. cable plug with
dimmer

📦 5.00kg 📦 IP20

	CODE
☐ ☐ ☐	6442E0WB0
☐ ☐ ☐	6442E0YB0

cable plug with dimmer



OPTIONAL

QA60 LED E27 9W dim

	CODE
☐ ☐ ☐	9003E148

2800K | 810lm
more lamps and specs on page 594


1.0 COMP

☛ 3x LED QT14 max. 3W | G9
220-240VAC | 50-60Hz
opal glass hand blown | aluminium
steel powder coated | black
textile cable | incl. cable plug with
dimmer

📦 4.60kg 📦 IP20

	CODE
☐ ☐ ☐	6443G0WB0
☐ ☐ ☐	6443G0YB0

cable plug with dimmer



OPTIONAL

QT14 LED opal 2.6W



	CODE
☐ ☐ ☐	9019G706

2700K | 170lm
more lamps and specs on page 595



ROCK COLLECTION

CEILING SUSPENDED



3.0

QA60 max.100W | E26-E27
220-240VAC | 50-60Hz
stone veneer | MDF lacquered

⏱ 3.5-5.5kg ⚡ IP20 ⚙ -0,9+D

370mm	CODE
	2201E8W0
	2201E8D0
560mm	CODE
	2203E8W0
	2203E8D0
740mm	CODE
	2205E8W0
	2205E8D0

4.0

QA60 max.100W | E26-E27
220-240VAC | 50-60Hz
stone veneer | MDF lacquered

⏱ 3.5-5.5kg ⚡ IP20 ⚙ -0,9+D

370mm	CODE
	2202E8W0
	2202E8D0
560mm	CODE
	2204E8W0
	2204E8D0
740mm	CODE
	2206E8W0
	2206E8D0

OPTIONAL

QA60 LED E27 6W dim	CODE
2200K 400lm	9003E109
2700K 600lm	9003E138

G95 LED E27 6W dim	CODE
2200K 400lm	9003E111

G95 LED E27 12W dim opal	CODE
2700K 1050lm	9003E137

more lamps and specs on page 595


OPTIONAL

QA60 LED E27 6W dim	CODE
2200K 400lm	9003E109
2700K 600lm	9003E138

G95 LED E27 6W dim	CODE
2200K 400lm	9003E111

G95 LED E27 12W dim opal	CODE
2700K 1050lm	9003E137

more lamps and specs on page 595

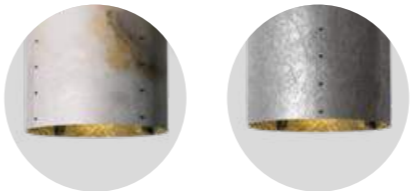


Stone is a pure natural product, there may be deviations from the pictures in shape and colour.



CLUBHOUSE FONTANA | INNOCAD ARCHITEKTUR ZT GMBH OBERWALTERSDORF | AUSTRIA




PRO MEDICO | INNOCAD ARCHITEKTUR ZT GMBH GRAZ | AUSTRIA

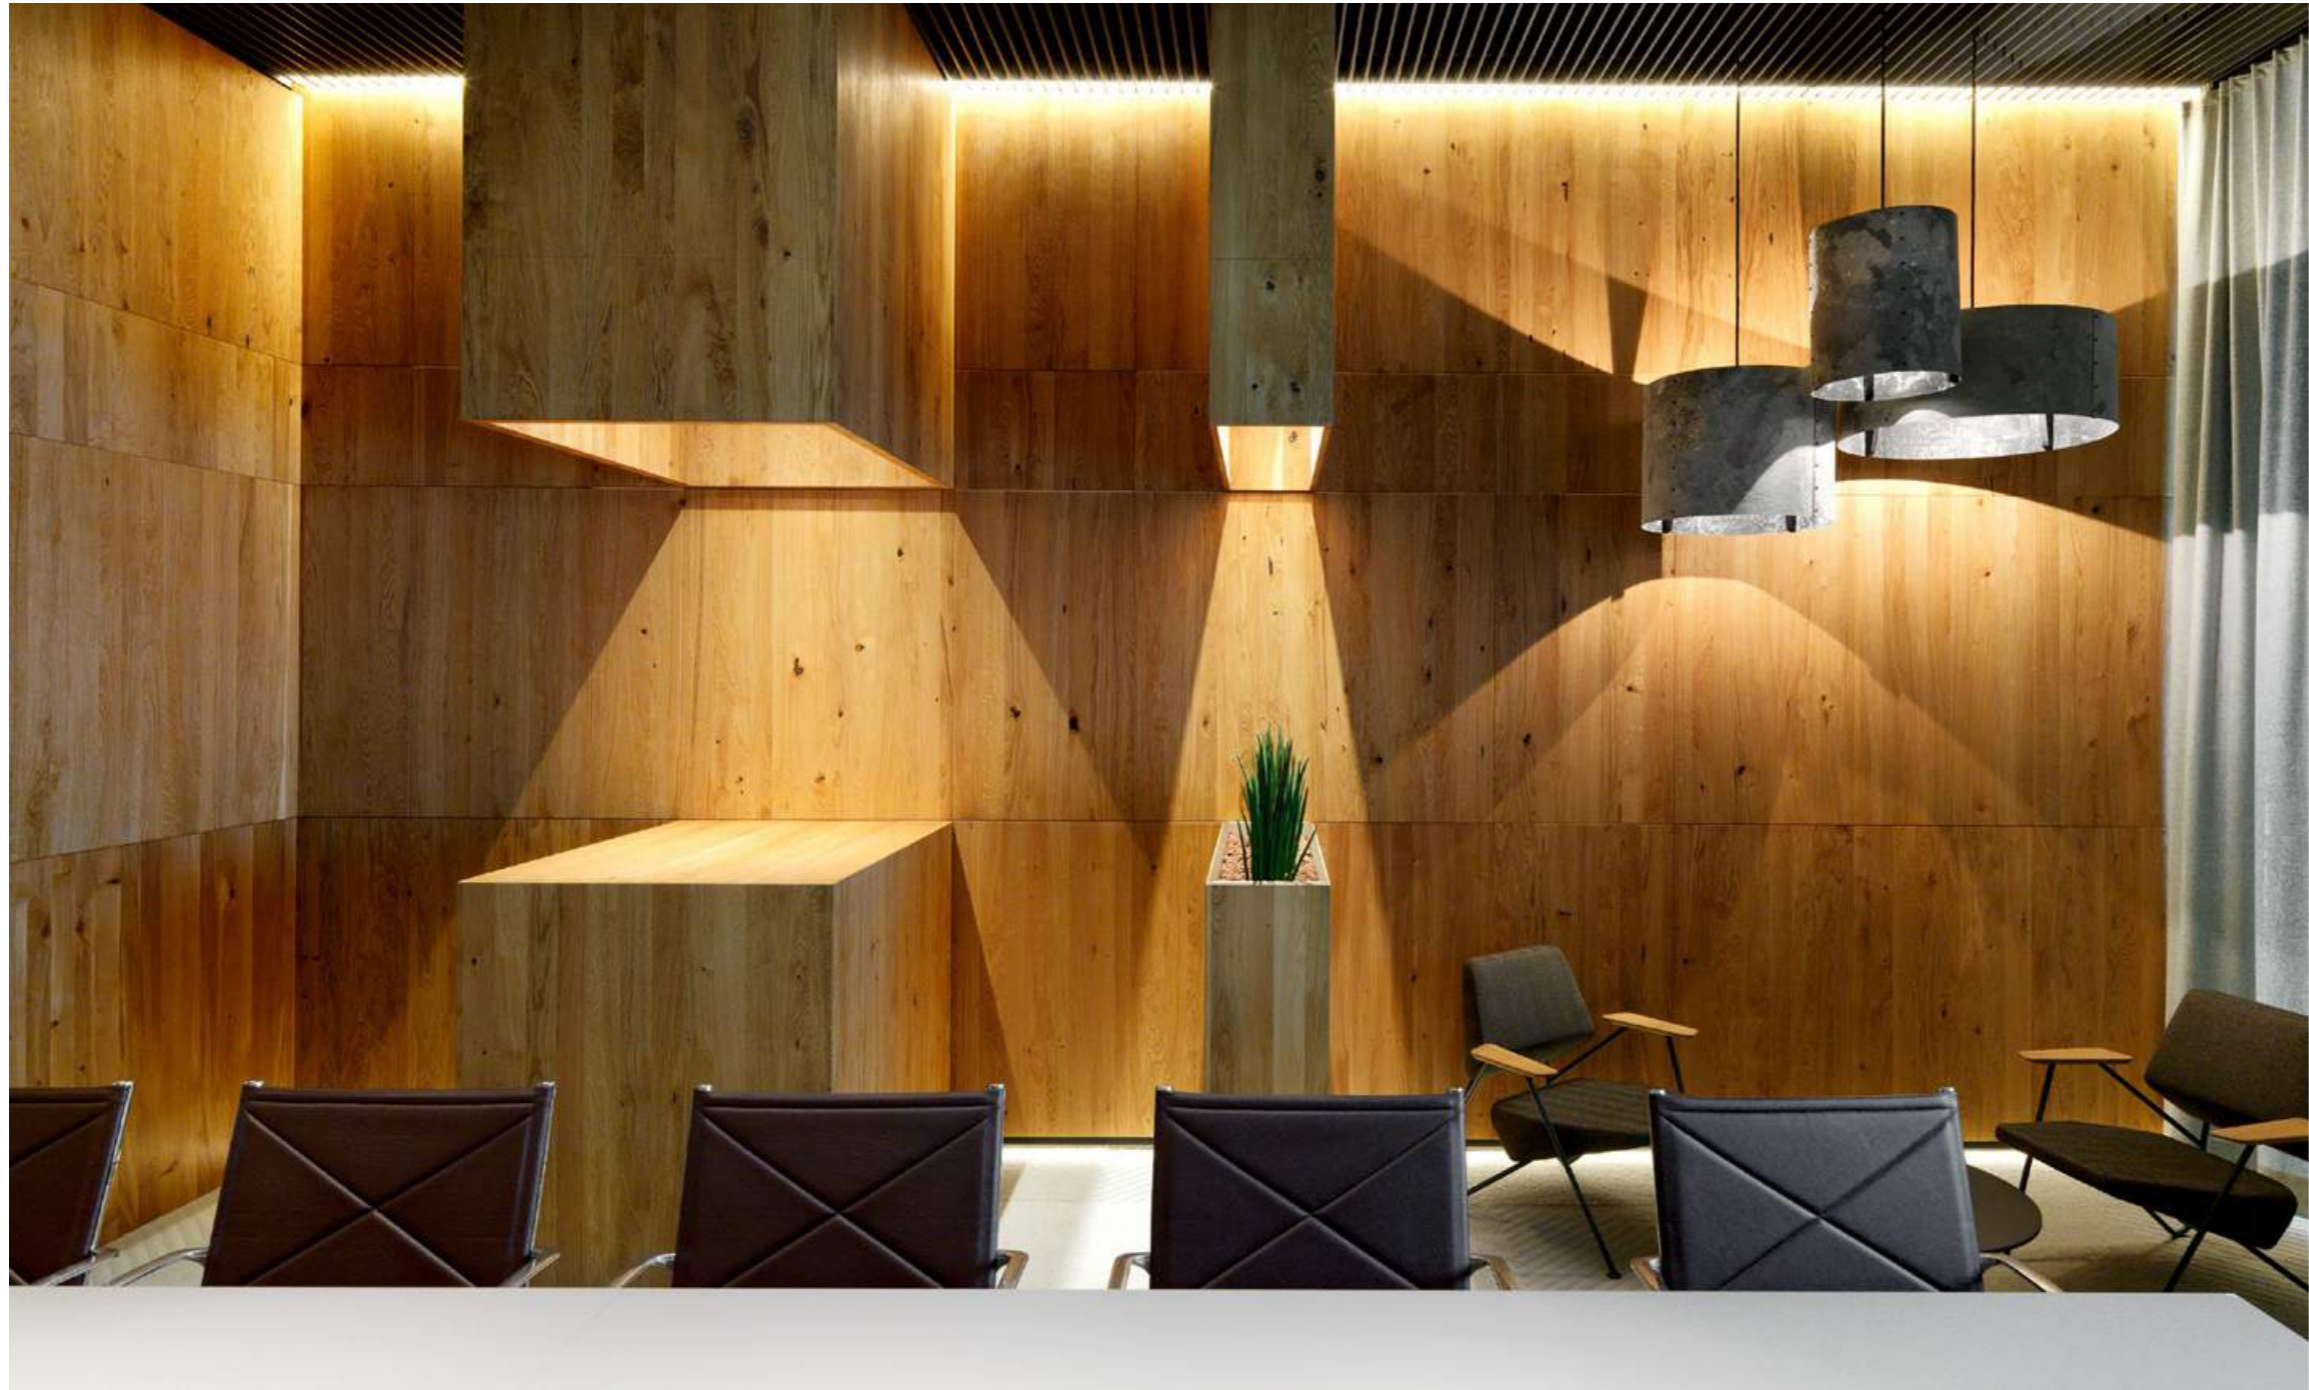

ROCK COLLECTION

FLOOR SURFACE



6.0

QA60 max.100W | E27
220-240VAC | 50-60Hz
stone veneer | MDF lacquered
incl. dimmer and switch

6.00kg IP20 0,9-D

CODE	
	2221E8W0
	2221E8D0

OPTIONAL


QA60 LED E27 6W dim

CODE	
2200K 400lm	9003E109
2700K 600lm	9003E138

G95 LED E27 6W dim	
2200K 400lm	9003E111

G95 LED E27 12W dim opal	
2700K 1050lm	9003E137

more lamps and specs on page 595



7.0

QA60 max.100W | E27
220-240VAC | 50-60Hz
stone veneer | MDF lacquered
incl. dimmer and switch

7.00kg IP20 0,9-D

CODE	
	2222E8W0
	2222E8D0

OPTIONAL


QA60 LED E27 6W dim

CODE	
2200K 400lm	9003E109
2700K 600lm	9003E138

G95 LED E27 6W dim	
2200K 400lm	9003E111

G95 LED E27 12W dim opal	
2700K 1050lm	9003E137

more lamps and specs on page 595



8.0

QA60 max.100W | E27
220-240VAC | 50-60Hz
stone veneer | MDF lacquered
incl. dimmer and switch

8.00kg IP20 0,9-D

CODE	
	2241E8W0
	2241E8D0

OPTIONAL

QA60 LED E27 6W dim


CODE	
2200K 400lm	9003E109
2700K 600lm	9003E138

G95 LED E27 6W dim	
2200K 400lm	9003E111

G95 LED E27 12W dim opal	
2700K 1050lm	9003E137

more lamps and specs on page 595

Stone is a pure natural product, there may be deviations from the pictures in shape and colour.





HAIRDRESSER ZEITGEIST | INNOCAD ARCHITEKTUR ZT GMBH GRAZ | AUSTRIA




CLUBHOUSE FONTANA | INNOCAD ARCHITEKTUR ZT GMBH OBERWALTERSDORF | AUSTRIA
back



ROCK COLLECTION

FLOOR SURFACE



1.0 NAKED

E27 max.100W
220-240VAC | 50-60Hz
MDF lacquered

CODE

2223E800

OPTIONAL

T32-300 carbon filament E27 15W

CODE

2200K | 50lm 9003E127

more lamps and specs on page 596

DESIGNER

Designing luminaires is a very niche art.

MARCELLO ZILIANI




MORE INFOS

weverducre.com/rever

Wever & Ducré teamed up with renowned designer Marcello Ziliani, who created an eclectic collection of luminaires. The lapels of men's jackets served as a model for the diffusers' shape. The lamp body is composed of a single piece of injection-moulded polycarbonate. Inspired by delicate linens, the surface texture is achieved by a complex, cutting-edge laser technology. Available in a variety of colours and metal finishes, REVER provides every room with an elegant yet warm atmosphere.

In Zusammenarbeit mit dem renommierten italienischen Designer Marcello Ziliani realisierte Wever & Ducré eine eklektische Leuchtenserie, die gekonnt zeitloses Design mit Funktionalität verbindet. Modernste Lasertechnologien verleihen der Oberfläche ihre zarte, von Leinen inspirierte Struktur. Der elegante Leuchtenkörper erinnert an ein Herrenanzugrevers. Klingt gut? Dann freut es Sie sicher auch zu hören, dass die REVER-Kollektion in ihrer Vielzahl an Farb- und Oberflächen-Kombinationen perfekt in jede Lobby passt. Und natürlich auch in jedes Hotelzimmer.



 back



REVER

CEILING SUSPENDED

1.0

- LED QA60 max. 15W | E27
- metalized or painted ABS
- polycarbonate | hanging in both ways

IP20 3.5kg

lamp body

CODE	Color
6521ETG	Teal
6521ESG	Grey
6521ECW	White
6521EAY	Yellow
6521EHR	Orange

mounting detail

CODE	Color
C	Black
N	White
G	Grey
P	Black
W	White
B	Black

mounting detail

CODE	Color
W	White
B	Black

6m cable available on request

OPTIONAL


QA60 LED E27 13W dim

CODE	Color
2700K 1520lm	9003E131



REVER

WALL SURFACE



1.0

LED C35 or P25 max. 6W | E14
plated or powder coated steel
polycarbonate

IP20 1kg

lamp body

	CODE
	6511CTG_
	6511CSG_
	6511CCW_
	6511CAY_
	6511CHR_


tray colours

	CODE
	C_
	N_
	G_
	P_
	W_
	B_

OPTIONAL

C35 LED E14 6W dim

	CODE
2700K 470lm	9003C101



1.1

LED C35 or P25 max. 6W | E14
plated or powder coated steel
polycarbonate | incl. cable plug
and dimmer


IP20 1kg

lamp body

	CODE
	6511CTG_
	6511CSG_
	6511CCW_
	6511CAY_
	6511CHR_

tray colours

	CODE
	C_
	N_
	G_
	P_
	W_
	B_



Cable Plug Colours


cable plug with dimmer

	CODE
	_W
	_B



REVER

WALL SURFACE



2.0

LED C35 or P25 max. 6W | E14
plated or powder coated steel
polycarbonate

IP20 0.7kg

lamp body

	CODE
	6512CTG_
	6512CSG_
	6512CCW_
	6512CAY_
	6512CHR_


mounting detail

	CODE
	C_
	N_
	G_
	P_
	W_
	B_

OPTIONAL

C35 LED E14 6W dim

	CODE
2700K 470lm	9003C101



2.1

LED C35 or P25 max. 6W | E14
plated or powder coated steel
polycarbonate | incl. cable plug
and dimmer


IP20 0.8kg

lamp body

	CODE
	6512CTG_
	6512CSG_
	6512CCW_
	6512CAY_
	6512CHR_

mounting detail

	CODE
	C_
	N_
	G_
	P_
	W_
	B_



Cable Plug Colours
cable plug with dimmer


	CODE
	_W
	_B



As awarded by The Chicago Athenaeum: Museum of Architecture and Design

REVER

TABLE



1.0

LED QA60 max. 12W | E27
plated or powder coated steel
polycarbonate | incl. white cable
for white tray otherwise black
cable

IP20 1.5kg


lamp body

	CODE
	6501ETG_
	6501ESG_
	6501ECW_
	6501EAY_
	6501EHR_

tray colours

	CODE
	C
	N
	G
	P
	W
	B


cable plug with dimmer



OPTIONAL

QA60 LED E27 9W dim

	CODE
2800K 810lm	9003E148



2.0

LED QA60 max. 12W | E27
plated or powder coated steel
polycarbonate | incl. black cable

IP20 1.1kg 12


lamp body

	CODE
	6502ETG_
	6502ESG_
	6502ECW_
	6502EAY_
	6502EHR_

mounting detail

	CODE
	C

cable plug with dimmer



OPTIONAL

QA60 LED E27 9W dim


	CODE
2800K 810lm	9003E148





REVER DINING

TABLE



1.0

LED 2.5W | 160 lm | 2700 K | touch dim | magnetic pole with optional base | rechargeable li-ion battery incl. 1.5m usb charging cable | lights up to 8 hours
powder coated zink alloy | PMMA

IP23 0.8kg

lamp body

	CODE
	655184C2
	655184N2
	655184G2
	655184P2
	655184W2
	655184B2

ALWAYS USE

Magnetic flat plate to add to REVER DINING with magnetic fixation suitable to put under the table cloth powder coated steel

plate colours

	CODE
	90019163
	90019164



ALWAYS USE

Single metal charging tray with magnetic fix to add to REVER DINING plated or powder coated steel

OPTIONAL

multiple charging tray | up to 4 fixtures



	CODE
	90018007

tray colours

	CODE
	90019171
	90019172
	90019173
	90019174
	90019165
	90019166



As awarded by
The Chicago Athenaeum:
Museum of Architecture
and Design






RESTAURANT FREIGEIST BRAUQUARTIER | FIPE ARCHITECTURE ZT KG & HERZBLUTDESIGN GMBH GRAZ | AUSTRIA



REVER

FLOOR SURFACE



1.0 XS

LED QA60 max. 12W | E27
 plated or powder coated steel
 polycarbonate | incl. white cable
 for white tray otherwise black cable

IP20 4.7kg

lamp body

CODE	CODE
6531ETG_	6532ETG_
6531ESG_	6532ESG_
6531ECW_	6532ECW_
6531EAY_	6532EAY_
6531EHR_	6532EHR_

mounting detail

CODE	CODE
C	C
N	N
G	G
P	P
W	W
B	B


cable plug with dimmer



OPTIONAL

QA60 LED E27 9W dim

CODE	CODE
2800K 810lm	9003E148



1.0 S

LED QA60 max. 12W | E27
 plated or powder coated steel
 polycarbonate | incl. white cable
 for white tray otherwise black cable

IP20 5kg


lamp body

CODE	CODE
6532ETG_	6533ETG_
6532ESG_	6533ESG_
6532ECW_	6533ECW_
6532EAY_	6533EAY_
6532EHR_	6533EHR_

mounting detail

CODE	CODE
C	C
N	N
G	G
P	P
W	W
B	B


cable plug with dimmer



OPTIONAL

QA60 LED E27 9W dim

CODE	CODE
2800K 810lm	9003E148



1.0 M

LED QA60 max. 12W | E27
 plated or powder coated steel
 polycarbonate | incl. white cable
 for white tray otherwise black cable

IP20 5.3kg


lamp body

CODE	CODE
6533ETG_	6533ETG_
6533ESG_	6533ESG_
6533ECW_	6533ECW_
6533EAY_	6533EAY_
6533EHR_	6533EHR_

mounting detail

CODE	CODE
C	C
N	N
G	G
P	P
W	W
B	B

cable plug with dimmer



OPTIONAL

QA60 LED E27 9W dim


CODE	CODE
2800K 810lm	9003E148





REVER

FLOOR SURFACE



2.0 M

LED QA60 max. 12W | E27
 plated or powder coated steel
 polycarbonate | incl. white cable
 for white tray otherwise black cable

IP20 5.7kg


lamp body

	CODE
	6541ETG_
	6541ESG_
	6541ECW_
	6541EAY_
	6541EHR_

mounting detail

	CODE
	C
	N
	G
	P
	W
	B


cable plug with dimmer



OPTIONAL

QA60 LED E27 9W dim

	CODE
2800K 810lm	9003E148



1.0 L

LED QA60 max. 12W | E27
 plated or powder coated steel
 polycarbonate | incl. white cable
 for white tray otherwise black cable

IP20 5.4kg


lamp body

	CODE
	6534ETG_
	6534ESG_
	6534ECW_
	6534EAY_
	6534EHR_

mounting detail

	CODE
	C
	N
	G
	P
	W
	B


cable plug with dimmer



OPTIONAL

QA60 LED E27 9W dim

	CODE
2800K 810lm	9003E148



2.0 L

LED QA60 max. 12W | E27
 plated or powder coated steel
 polycarbonate | incl. white cable
 for white tray otherwise black cable

IP20 5.8kg


lamp body

	CODE
	6542ETG_
	6542ESG_
	6542ECW_
	6542EAY_
	6542EHR_

mounting detail

	CODE
	C
	N
	G
	P
	W
	B

cable plug with dimmer



OPTIONAL

QA60 LED E27 9W dim

	CODE
2800K 810lm	9003E148



J.J.W. 042



J.J.W. 05



J.J.W. 02



CURIOUS?

weverducre.com/jjw

DESIGNER

You can learn new things from old ones.


JULES WABBES




Jules Wabbes (1919–1974), who had a penchant for finding new ideas at flea markets, must have had the same thought. It's no wonder people said that the Belgian architect and furniture designer had a unique eye for shapes and materials. And that is apparent in his countless designs even today. A primary example: The chandelier, developed in the 1970s, whose futuristic, floral form is as much at home in a modern bar as in a posh hotel lobby.

So oder so ähnlich könnte Jules Wabbes (1919–1974) gedacht haben, der sich gerne auf Flohmärkten inspirieren ließ. Kein Wunder, dass man dem belgischen Architekten und Möbeldesigner einen ganz besonderen Blick für Formen und Materialien nachsagte. Dieser manifestiert sich in seinen zahlreichen Entwürfen, die bis heute nicht aus der Mode gekommen sind. Bestes Beispiel: Ein in den 1970er Jahren entworfener Kronleuchter, dessen futuristische, florale Form sich damals wie heute gleichermaßen perfekt in moderne Bars und edle Hotel-Lobbys einfügt.

Jules Wabbes with one of his desks at the Royale Belge, Brussels, 1971, © Wabbes Sofam, Brussels, 2017.





03

3x QA60 max. 53W | E27
220-240VAC | 50-60Hz
aluminium lacquered


☑ ⏸ ⊕ ⚡

CODE	
	2051E8S0
	2051E8G0

OPTIONAL

CODE	
QA60 LED E27 6W dim	
2200K 400lm	9003E109
2700K 600lm	9003E138

more lamps and specs on page 595



04

6x QA60 max.53W | E27
220-240VAC | 50-60Hz
aluminium lacquered

4.50kg IP20


CODE	
	2052E8S0
	2052E8G0

OPTIONAL

QA60 LED E27 6W dim

CODE	
2200K 400lm	9003E109
2700K 600lm	9003E138

more lamps and specs on page 595



042

6x QA60 max.53W | E27
220-240VAC | 50-60Hz
aluminium lacquered

8.10kg IP20


CODE	
	2056E8S0
	2056E8G0

OPTIONAL

QA60 LED E27 6W dim

CODE	
2200K 400lm	9003E109
2700K 600lm	9003E138

more lamps and specs on page 595



05

3x QA60 max.53W | E27
220-240VAC | 50-60Hz
aluminium lacquered





	CODE
	2053E8S0
	2053E8G0

OPTIONAL

QA60 LED E27 6W dim	CODE
2200K 400lm	9003E109
2700K 600lm	9003E138

more lamps and specs on page 595





01

2x QA60 max.53W | E27
220-240VAC | 50-60Hz
aluminium lacquered

2.92kg IP20 0-10V

CODE

2054E8S0
2054E8G0


OPTIONAL

QA60 LED E27 6W dim

CODE

2200K | 400lm 9003E109
2700K | 600lm 9003E138

more lamps and specs on page 595



02

QA60 max.53W | E27
220-240VAC | 50-60Hz
aluminium lacquered



	CODE
	2055E8S0
	2055E8G0

OPTIONAL

QA60 LED E27 6W dim

	CODE
2200K 400lm	9003E109
2700K 600lm	9003E138

more lamps and specs on page 595



CEILING RECESSED

p. 151 – 229



DEEP
p. 153



DEEP ADJUST
p. 159



DEEP ASYM
p. 167



DEEP IP44
p. 169



DEEP 2.0
p. 171



DEEPER
p. 173



DEEPER IP44
p. 175



RONY
p. 179



RON
p. 181




RINI IP44
p. 185



RINI SNEAK IP44
p. 187



PYRAMID
p. 189



SNEAK TRIMLESS
p. 209



HIDE
p. 211



CITY IP44
p. 215



CORY
p. 217



CORO
p. 219



PLANO
p. 191



STRANGE
p. 197




LUNA ROUND IP44
p. 201



LUNA SQUARE IP44
p. 203



LITO
p. 205



SNEAK TRIM
p. 207



MIRBI IP44 1.0
p. 221



MIRBI IP44 2.0
p. 221



SPYDER
p. 223



SPINEO
p. 225



NOP
p. 227

HOW DEEP IS YOUR DEEP?




HAVE A LOOK
weverducre.com/deep

THE ALL-ROUNDER

The recessed luminaires in our DEEP series prefer a more understated approach. They prefer to stay out of sight, hidden deep in the ceiling. Their narrow edge makes that possible, allowing them to blend seamlessly with it. This trimless effect makes these space-saving multi-talents particularly popular. Thanks to the recessed installation in a round ceiling cut-out, the visible support is concealed. The result is a particularly attractive, sophisticated look which reduces glare to a minimum. All with minimal effort. Because DEEP is extremely easy to mount and – in contrast to conventional recessed luminaires – also creates a lot of fantastic effects. That's its speciality. With its three different beam options – BASIC, ADJUST, and ASYM – both individual objects and entire walls can be accentuated.

EINE FÜR ALLES


Die Einbauleuchten unserer DEEP-Serie mögen's lieber dezent. Deshalb verstecken sie sich gerne tief in der Decke. Möglich macht's ihr schmaler Rand, der sie nahtlos mit ihr verschmelzen lässt. Dieser Trimless-Effekt macht die platzsparenden Alleskönner natürlich ganz besonders beliebt. Denn durch den in einen runden Deckenausschnitt zurückversetzten Einbau verschwindet die sichtbare Halterung. So wird eine besonders schöne, wertige Optik erzielt und die Blendwirkung auf ein Minimum reduziert. Und das mit minimalem Aufwand. Denn DEEP lässt sich super-easy montieren und sorgt – im Gegensatz zu herkömmlichen Einbauleuchten – auch für viele tolle Effekte. Dafür ist sie nämlich Spezialistin. Denn durch ihre 3 unterschiedlichen Abstrahlvarianten – BASIC, ADJUST und ASYM – lassen sich nicht nur einzelne Objekte, sondern auch ganze Wände toll akzentuieren.



PETIT

may be small, but it has a lot to offer. After all, it can be used as a fixed or as a pivoting spotlight. Very smart.


ist zwar klein, hat aber einiges zu bieten. Denn sie kann als fixer oder schwenkbarer Spot eingesetzt werden. Echt clever.



BASIC

is a classic downlight whose light beam is directed straight downwards. Perfect for corridors or large ceilings.


ist ein klassisches Downlight, dessen Lichtstrahl gerade nach unten verläuft. Perfekt für den Flur oder großflächige Decken.



LED111

provides a great deal of light but has a very shallow installation depth. This translates into bright, friendly rooms with a glare-free light source.


spendet viel Licht, hat aber eine sehr geringe Einbautiefe. Das heißt: helle, freundliche Räume mit blendfreier Lichtquelle.



ADJUST

unlike BASIC, can be pivoted. This makes it easy to put individual objects in the right light.


ist im Unterschied zu BASIC schwenkbar. So können einzelne Objekte ganz einfach ins rechte Licht gerückt werden.



ASYM

is the artist among the recessed luminaires. It can be used to highlight surface structures on the wall.


ist der Künstler unter den Einbauleuchten. Mit ihm lassen sich Oberflächenstrukturen an der Wand gekonnt hervorheben.



IP44

loves the water. That's because water can't do it any harm. So it is the perfect choice for providing brilliant illumination in the bathroom.


liebt Wasser. Und zwar, weil es ihr nichts anhaben kann. Also passt sie gut ins Bad, wo sie für eine brillante Ausleuchtung sorgt.



TWO LAMPS ADJUST

creates a magnificent ceiling visual. For elongated rooms, the light point can be reduced to a single source and lengthened.


kreiert ein tolles Deckenbild. Bei länglichen Räumen kann der Lichtpunkt auf eine Quelle reduziert und langgezogen werden.



DEEPER

eliminates glare and provides optimum illumination for individual seating areas. Perfect for use in bars and restaurants.

blendet nicht und leuchtet einzelne Sitzbereiche optimal aus. Denn sie ist tief in der Decke versenkt. Perfekt für den Bar- und Restaurantbereich.



back



DEEP petit

CEILING RECESSED



1.0 LED

LED 6W | 350mA | 18V
COB 3-step | excl. power supply
aluminium powder coated

0.04kg IP20 0.3-1 A 34°

68 60 4-25

CODE

White	153161W
Grey	153161S
Black	153161B

Light Colour Selection

	LUMEN	CRI	CODE
2700K	580	>90	3
3000K	610	>90	5
1800-2700K 15V	360	>95	9


ALWAYS USE

power supply

CODE

350mA 10W	90223401
350mA 10W dim	90223402

more power supplies on page 588
fits into Kaiser ThermoX® 9320-11



back




DEEP

CEILING RECESSED



p. 587



1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated

0.31kg IP20 3-0,3-D P 36°

76 90 4-30

CODE
112161W_
112161S_
112161B_

blade springs 78

CODE
112161W_C
112161B_C

Light Colour Selection

LUMEN CRI	CODE
2700K 520/710 >90	3
3000K 540/740 >90	5
4000K 580/790 >90	6
1800-2850K 16V 330/450 >95	9

ALWAYS USE

power supply

CODE
350mA 10W 90223401
500mA 10W 90214404
500mA 15W dim 90224501

more power supplies on page 588



1.0 MR16

QR-CBC51 max.35W | GU5.3
12V | excl. power supply
aluminium powder coated

0.25kg IP20 3-0,9-D

76 90 4-30

CODE
112110W0
112110S0
112110B0

blade springs 78

CODE
112110W0C
112110B0C

ALWAYS USE

power supply

CODE
12V 10W dim 90221401
12V 25W dim 90221701
12V 70W dim 90221904

more specs on page 591



1.0 PAR16

PAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.29kg IP20 3-0,9-D

76 105 4-30

CODE
112120W0
112120S0
112120B0

blade springs 78

CODE
112120W0C
112120B0C

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

CODE
2700K 901228W2
3000K 901228W4
1800-2850K 901229S9

more lamps and specs on page 593



Allianz Benelux

Carly J. Jans

FOYER

ivate estate LIFE


DELTA LLOYD life

AG Insurance

DHS


Meridi Belgium

[back](#)

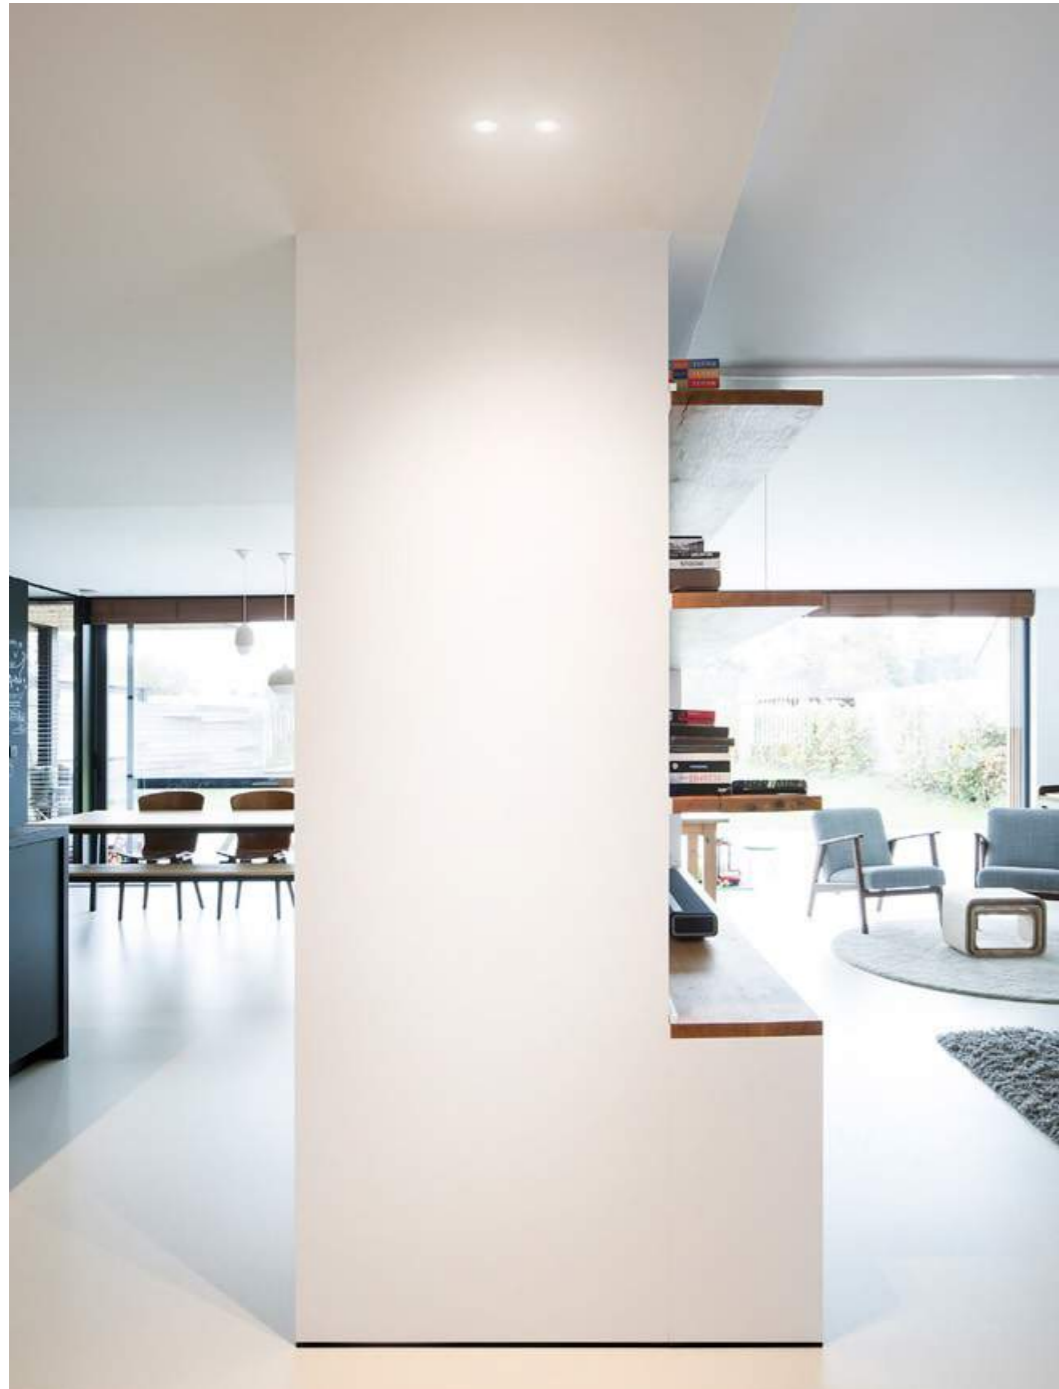

DEEP ADJUST petit

CEILING RECESSED



1.0 LED

LED 6W | 350mA | 18V
COB 3-step | excl. power supply
aluminium powder coated

0.05kg IP20 0,3-1 P A 34°

68 35°/35° 355° 60 4-25

CODE

	153361W_
	153361G_
	153361Q_
	153361B_

blade springs 70

CODE

	153361W_C
	153361B_C

Light Colour Selection

	LUMEN	CRI	CODE
2700K	580	>90	3
3000K	610	>90	5
1800-2700K 15V	360	>95	9

ALWAYS USE

power supply

CODE


350mA 10W	90223401
350mA 10W dim	90223402

more power supplies on page 588
fits into Kaiser ThermoX® 9320-11



DEEP ADJUST

CEILING RECESSED



1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated

0.23kg IP20 35°/35° 355° 90° 4-30

87 35°/35° 355° 90° 4-30

	CODE
	112361W
	112361S
	112361G
	112361Q
	112361B

blade springs 89

	CODE
	112361W_C
	112361B_C

Light Colour Selection

	LUMEN	CRI	CODE
2700K	520/710	>90	3
3000K	540/740	>90	5
4000K	580/790	>90	6
1800-2850K	16V 330/450	>95	9

ALWAYS USE

power supply

	CODE
350mA 10W	90223401
500mA 10W	90214404
500mA 15W dim	90224501

more power supplies on page 588



1.0 MR16

QR-CBC51 max.35W | GU5.3
12V | excl. power supply
aluminium powder coated

0.17kg IP20 35°/35° 355° 90° 4-30

87 35°/35° 355° 90° 4-30

	CODE
	112310W0
	112310S0
	112310G0
	112310Q0
	112310B0

blade springs 89


	CODE
	112310W0C
	112310B0C

ALWAYS USE

power supply

	CODE
12V 10W dim	90221401
12V 25W dim	90221701
12V 70W dim	90221904

more specs on page 591



1.0 PAR16

PAR16 max.12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.21kg IP20 35°/35° 355° 105° 4-30

87 35°/35° 355° 105° 4-30

	CODE
	112320W0
	112320S0
	112320G0
	112320Q0
	112320B0

blade springs 89

	CODE
	112320W0C
	112320B0C

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9




more lamps and specs on page 593





DEEP ADJUST

CEILING RECESSED



1.0 LED111

LED 12W | 220-240VAC | 50-60Hz
AC-COB 3-step | phase-cut dim
aluminium powder coated

0.65kg IP20 3-0,3-D 38°

177 35°/35° 355° 100 4-30

	CODE
White	112568W
Black	112568B

Light Colour Selection

	LUMEN CRI	CODE
2700K	680 >90	3
3000K	720 >90	5
1800-2850K	830 >80	9

1.0 LED111 HO

LED 15W | 220-240VAC | 50-60Hz
AC-COB 3-step | phase-cut dim
aluminium powder coated

0.65kg IP20 3-0,3-D 30°

177 35°/35° 355° 100 4-30

	CODE
White	112578W
Black	112578B

Light Colour Selection

	LUMEN CRI	CODE
2700K	1050 >80	2
3000K	1200 >80	4

1.0 QR111

QR111 max.75W | G53
12V | excl. power supply
aluminium powder coated

0.41kg IP20 3-0,9-D

177 35°/35° 355° 100 4-30

	CODE
White	112530W
Black	112530B

ALWAYS USE

power supply

	CODE
12V 10W dim	90221401
12V 25W dim	90221701
12V 70W dim	90221904

more specs on page 591



DEEP ASYM

CEILING RECESSED



p. 587



1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated

0.25kg IP20 35° 100 4-30

87 35°/35° 355° 100 4-30

CODE
112461W
112461S
112461G
112461B

Light Colour Selection

LUMEN	CRI	CODE
2700K	450/610	>90 3
3000K	470/640	>90 5
1800-2850K	16V 290/390	>95 9

ALWAYS USE

power supply

CODE
350mA 10W
500mA 10W
500mA 15W dim

more power supplies on page 588



1.0 MR16

QR-CBC51 max.35W | GU5.3
12V | excl. power supply
aluminium powder coated

0.19kg IP20 35° 90 4-30

87 35°/35° 355° 90 4-30

CODE
112410W0
112410S0
112410G0
112410B0

ALWAYS USE

power supply

CODE
12V 10W dim
12V 25W dim
12V 70W dim

more specs on page 591



1.0 PAR16

PAR16 max.12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.23kg IP20 35° 115 4-30

87 35°/35° 355° 115 4-30

CODE
112420W0
112420S0
112420G0
112420B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

CODE
2700K
3000K
1800-2850K

more lamps and specs on page 593




DEEP IP44

CEILING RECESSED



p. 587



1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated

0.32kg | IP44 | 36°

87 90 4-30

CODE
112661W_
112661B_

blade springs 89

CODE
112661W_C
112661B_C

Light Colour Selection


LUMEN	CRI	CODE
2700K	470/630 >90	3
3000K	490/660 >90	5
1800-2850K	16V 300/400 >95	9

ALWAYS USE

power supply

CODE
350mA 10W
500mA 10W
500mA 15W dim

more power supplies on page 588



1.0 MR16

QR-CBC51 max. 35W | GU5.3
12V | excl. power supply
aluminium powder coated

0.26kg | IP44

87 90 4-30

CODE
112610W0
112610B0

blade springs 89


CODE
112610W0C
112610B0C

ALWAYS USE

power supply

CODE
12V 10W dim
12V 25W dim
12V 70W dim

more specs on page 591



1.0 PAR16

PAR16 max. 35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.30kg | IP44

87 105 4-30

CODE
112620W0
112620B0

blade springs 89


CODE
112620W0C
112620B0C

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

CODE
2700K
3000K
1800-2850K

more lamps and specs on page 593



back





DEEP 2.0

CEILING RECESSED



p. 587



2.0 LED

2xLED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated
1800-2850K 16V

0.61kg IP20 0.3-1D 36°

87x176 35°/35° 355° 90 4-30

2.0 PAR16

2xPAR16 max.12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.42kg IP20 0.9-1D

87x176 35°/35° 355° 105 4-30

CODE

112761W_

112761B_

CODE

112720W0

112720B0

Light Colour Selection

	LUMEN	CRI	CODE
2700K	2x520/710	>90	3
3000K	2x540/740	>90	5
1800-2850K	2x330/450	>95	9

ALWAYS USE

power supply

CODE

350mA | 10W 90223401

500mA | 10W 90214404

500mA | 15W dim 90224501

more power supplies on page 588

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

CODE

2700K 901228W2

3000K 901228W4

1800-2850K 901229S9

more lamps and specs on page 593




DEEPER

CEILING RECESSED



p. 587



1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated

0.17kg IP20 3+D 36°

76 95 4-30

Color	CODE
White	152161W
Grey	152161S
Gold	152161Q
Black	152161B

Light Colour Selection


Color	LUMEN	CRI	CODE
2700K	440/590	>90	3
3000K	450/620	>90	5
1800-2850K	16V 280/370	>95	9

ALWAYS USE

power supply

Specs	CODE
350mA 10W	90223401
500mA 10W	90214404
500mA 15W dim	90224501

more power supplies on page 588



1.0 MR16

QR-CBC51 max.35W | GU5.3
12V | excl. power supply
aluminium powder coated

0.11kg IP20 0.9+D

76 100 4-30


Color	CODE
White	152110W0
Grey	152110S0
Gold	152110Q0
Black	152110B0

ALWAYS USE

power supply

Specs	CODE
12V 10W dim	90221401
12V 25W dim	90221701
12V 70W dim	90221904

more specs on page 591



1.0 PAR16

PAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.15kg IP20 0.9+D

76 115 4-30

Color	CODE
White	152120W0
Grey	152120S0
Gold	152120Q0
Black	152120B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

Color	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593




DEEPER IP44

CEILING RECESSED



p. 587



1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated

0.17kg | IP44 | 30° | 36°

76 | 95 | 4-30

	CODE
White	152261W
Black	152261B

Light Colour Selection

	LUMEN	CRI	CODE
2700K	440/590	>90	3
3000K	450/620	>90	5
1800-2850K	16V 280/370	>95	9

ALWAYS USE

power supply

	CODE
350mA 10W	90223401
500mA 10W	90214404
500mA 15W dim	90224501

more power supplies on page 588

1.0 MR16

QR-CBC51 max.35W | GU5.3
12V | excl. power supply
aluminium powder coated

0.11kg | IP44

76 | 100 | 4-30

	CODE
White	152210W0
Black	152210B0

ALWAYS USE

power supply

	CODE
12V 10W dim	90221401
12V 25W dim	90221701
12V 70W dim	90221904

more specs on page 591

1.0 PAR16

PAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.15kg | IP44

76 | 115 | 4-30


	CODE
White	152220W0
Black	152220B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593



back





1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated

0.34kg IP20 360° 36°

102 35°/35° 355° 90 4-40

CODE
110161W_
110161B_

blade springs

CODE
110161W_C
110161B_C

Light Colour Selection

LUMEN	CRI	CODE
2700K	520/710 >90	3
3000K	540/740 >90	5
1800-2850K 16V	330/450 >95	9

ALWAYS USE

power supply

CODE	
350mA 10W	90223401
500mA 10W	90214404
500mA 15W dim	90224501

more power supplies on page 588



1.0 MR16

QR-CBC51 max.35W | GU5.3
12V | excl. power supply
aluminium powder coated

0.28kg IP20 90°

102 35°/35° 355° 75 4-40

CODE
110110W0
110110B0

blade springs

CODE
110110W0C
110110B0C

ALWAYS USE

power supply

CODE	
12V 10W dim	90221401
12V 25W dim	90221701
12V 70W dim	90221904

more specs on page 591



1.0 PAR16

PAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.32kg IP20 90°

102 35°/35° 355° 100 4-40

CODE
110120W0
110120B0

blade springs

CODE
110120W0C
110120B0C


OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

CODE	
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593





1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated
round cut-out for mounting

0.36kg IP20 360° 36°

102 35°/35° 355° 90° 4-40

CODE
111161W_
111161B_

blade springs

CODE
111161W_C
111161B_C

Light Colour Selection

LUMEN	CRI	CODE
2700K	520/710 >90	3
3000K	540/740 >90	5
1800-2850K 16V	330/450 >95	9

ALWAYS USE

power supply

CODE
350mA 10W
500mA 10W
500mA 15W dim

more power supplies on page 588

1.0 MR16

QR-CBC51 max.35W | GU5.3
12V | excl. power supply
aluminium powder coated
round cut-out for mounting

0.30kg IP20 360°

102 35°/35° 355° 75° 4-40

CODE
111110W0
111110B0

blade springs

CODE
111110W0C
111110B0C

ALWAYS USE

power supply

CODE
12V 10W dim
12V 25W dim
12V 70W dim

more specs on page 591

1.0 PAR16

PAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
round cut-out for mounting

0.34kg IP20 360°

102 35°/35° 355° 100° 4-40

CODE
111120W0
111120B0

blade springs

CODE
111120W0C
111120B0C

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

CODE
2700K
3000K
1800-2850K

more lamps and specs on page 593







RON

CEILING RECESSED



p. 587



2.0 LED

2xLED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated
1800-2850K 16V

0.73kg IP20 0,3-1D 36°

102x210 35°/35° 355° 90 4-40

CODE

	111261W_
	111261B_

Light Colour Selection

	LUMEN	CRI	CODE
2700K	2x520/710	>90	3
3000K	2x540/740	>90	5
1800-2850K	2x330/450	>95	9

ALWAYS USE

power supply

CODE

350mA 10W	90223401
500mA 10W	90214404
500mA 15W dim	90224501

more power supplies on page 588

2.0 PAR16

2xPAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.69kg IP20 0,9-1D

102x210 35°/35° 355° 100 4-40

CODE

	111220W0
	111220B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

CODE

2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593

3.0 LED

3xLED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated
1800-2850K 16V

1.08kg IP20 0,3-1D 36°

102x320 35°/35° 355° 90 4-40

CODE

	111361W_
	111361B_

Light Colour Selection

	LUMEN	CRI	CODE
2700K	3x520/710	>90	3
3000K	3x540/740	>90	5
1800-2850K	3x330/450	>95	9

ALWAYS USE

power supply

CODE

350mA 10W	90223401
500mA 10W	90214404
500mA 15W dim	90224501

more power supplies on page 588

3.0 PAR16

3xPAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

1.02kg IP20 0,9-1D

102x320 35°/35° 355° 100 4-40

CODE

	111320W0
	111320B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

CODE

2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593





RINI IP44

CEILING RECESSED



p. 587



1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated

0.16 kg | IP44 | 36°

76 | 60 | 4-30

CODE	
154161W	154161B

Light Colour Selection

LUMEN	CRI	CODE
2700K	470/640 >90	3
3000K	490/660 >90	5
1800-2850K 16V 300/400	>95	9

ALWAYS USE

power supply

	CODE
350mA 10W	90223401
500mA 10W	90214404
500mA 15W dim	90224501

more power supplies on page 588

1.0 MR16

QR-CBC51 max. 35W | GU5.3
12V | excl. power supply
aluminium powder coated

0.10 kg | IP44

76 | 70 | 4-30

CODE	
154110W0	154110B0

ALWAYS USE

power supply

	CODE
12V 10W dim	90221401
12V 25W dim	90221701
12V 70W dim	90221904

more specs on page 591

1.0 PAR16

PAR16 max. 35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.14 kg | IP44

76 | 95 | 4-30

CODE	
154120W0	154120B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593




RINI SNEAK IP44

CEILING RECESSED



p. 587



1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated

0.18 kg | IP44 | 36°

76 | 46 | 4-30

	CODE
White	154261W
Black	154261B

Light Colour Selection


	LUMEN	CRI	CODE
2700K	460/620	>90	3
3000K	480/640	>90	5
1800-2850K	16V 290/390	>95	9

ALWAYS USE

power supply

	CODE
350mA 10W	90223401
500mA 10W	90214404
500mA 15W dim	90224501

more power supplies on page 588



1.0 MR16

QR-CBC51 max. 35W | GU5.3
12V | excl. power supply
aluminium powder coated

0.12 kg | IP44

76 | 55 | 4-30


	CODE
White	154210W0
Black	154210B0

ALWAYS USE

power supply

	CODE
12V 10W dim	90221401
12V 25W dim	90221701
12V 70W dim	90221904

more specs on page 591



1.0 PAR16

PAR16 max. 35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.16 kg | IP44

76 | 80 | 4-30

	CODE
White	154220W0
Black	154220B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593






PYRAMID

CEILING RECESSED



p. 587



1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated
1800-2850K 16V

0.28kg IP20 35°/35° 355° 90° 4-30

102x102 35°/35° 355° 90° 4-30

CODE

113161W

Light Colour Selection

	LUMEN	CRI	CODE
2700K	490/660	>90	3
3000K	500/680	>90	5
1800-2850K	310/410	>95	9

ALWAYS USE

power supply

CODE

350mA 10W	90223401
500mA 10W	90214404
500mA 15W dim	90224501

more power supplies on page 588

1.0 PAR16

PAR16 max.12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.26kg IP20 35°/35° 115° 4-30

102x102 35°/35° 355° 115° 4-30

CODE

1132120W

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

CODE

2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593

2.0 LED

2xLED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated
1800-2850K 16V

0.50kg IP20 35°/35° 355° 90° 4-30

102x172 35°/35° 355° 90° 4-30

CODE

113261W

Light Colour Selection

	LUMEN	CRI	CODE
2700K	2x490/660	>90	3
3000K	2x500/680	>90	5
1800-2850K	2x310/410	>95	9

ALWAYS USE

power supply

CODE

350mA 10W	90223401
500mA 10W	90214404
500mA 15W dim	90224501

more power supplies on page 588

2.0 PAR16

2xPAR16 max.12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.46kg IP20 35°/35° 115° 4-30

102x172 35°/35° 355° 115° 4-30

CODE

113220W

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

CODE




2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593



PLANO petit

CEILING RECESSED



1.0 LED

LED 6W | 350mA | 18V
COB 3-step | excl. power supply
aluminium powder coated

0.08kg IP20 $\theta < 0,3^\circ$ $\Delta < 34^\circ$

54x59 $\theta < 25^\circ/25^\circ$ $\psi < 355^\circ$ $\text{IP} < 65$ $\text{C} < 2-22$

	CODE
	162161W
	162161Q
	162161B

Light Colour Selection

	LUMEN	CRI	CODE
2700K	580	>90	3
3000K	610	>90	5
1800-2700K 15V	360	>95	9

ALWAYS USE

power supply

	CODE
350mA 10W	90223401
350mA 10W dim	90223402

more power supplies on page 588

2.0 LED

2xLED 6W | 350mA | 18V
COB 3-step | excl. power supply
aluminium powder coated

0.15kg IP20 $\theta < 0,3^\circ$ $\Delta < 34^\circ$

54x110 $\theta < 25^\circ/25^\circ$ $\psi < 355^\circ$ $\text{IP} < 65$ $\text{C} < 2-22$

	CODE
	162261W
	162261Q
	162261B

Light Colour Selection

	LUMEN	CRI	CODE
2700K	2x580	>90	3
3000K	2x610	>90	5
1800-2700K 15V	2x360	>95	9

ALWAYS USE

power supply

	CODE
350mA 10W	90223401
350mA 10W dim	90223402

more power supplies on page 588

3.0 LED

3xLED 6W | 350mA | 18V
COB 3-step | excl. power supply
aluminium powder coated

0.22kg IP20 $\theta < 0,3^\circ$ $\Delta < 34^\circ$

54x162 $\theta < 25^\circ/25^\circ$ $\psi < 355^\circ$ $\text{IP} < 65$ $\text{C} < 2-22$

	CODE
	162361W
	162361Q
	162361B

Light Colour Selection

	LUMEN	CRI	CODE
2700K	3x580	>90	3
3000K	3x610	>90	5
1800-2700K 15V	3x360	>95	9

ALWAYS USE

power supply

	CODE
350mA 10W	90223401
350mA 10W dim	90223402

more power supplies on page 588



p. 587



1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated
1800-2850K 16V

0.26kg IP20 36°

74x78 35°/35° 355° 95 2-18

CODE
118161W_
118161S_
118161Q_
118161B_

Light Colour Selection

	LUMEN CRI	CODE
2700K	520/710 >90	3
3000K	540/740 >90	5
1800-2850K	330/450 >95	9

ALWAYS USE


power supply

	CODE
350mA 10W	90223401
500mA 10W	90214404
500mA 15W dim	90224501

more power supplies on page 588

OPTIONAL

	CODE
plasterkit	90017104



1.0 PAR16

PAR16 max.12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.24kg IP20 36°

74x78 35°/35° 355° 120 2-18

CODE
11820W0
11820S0
11820Q0
11820B0

OPTIONAL


PAR16 LED GU10 7W
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593

OPTIONAL

	CODE
plasterkit	90017104



2.0 LED

2xLED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated
1800-2850K 16V

0.48kg IP20 36°

74x148 35°/35° 355° 95 2-18

CODE
118261W_
118261S_
118261Q_
118261B_

Light Colour Selection

	LUMEN CRI	CODE
2700K	2x520/710 >90	3
3000K	2x540/740 >90	5
1800-2850K	2x330/450 >95	9

ALWAYS USE


power supply

	CODE
350mA 10W	90223401
500mA 10W	90214404
500mA 15W dim	90224501

more power supplies on page 588

OPTIONAL


	CODE
plasterkit	90017105



back

PLANO

CEILING RECESSED



2.0 PAR16

2xPAR16 max.12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.44kg IP20 36°

74x148 35°/35° 355° 120 2-18

CODE
118220W0
118220S0
118220Q0
118220B0

OPTIONAL




PAR16 LED GU10 7W
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593

OPTIONAL

	CODE
plasterkit	90017105



PLANO

CEILING RECESSED

1.0 LED111

LED 12W | 220-240VAC | 50-60Hz
AC-COB 3-step | phase-cut dim
aluminium powder coated

0.65kg IP20 0.3-D 30°

141x145 35°/35° 355° 90 2-18

	CODE
	118368W
	118368S
	118368B

Light Colour Selection

	LUMEN CRI	CODE
2700K	680 >90	3
3000K	720 >90	5
1800-2850K	830 >80	9

OPTIONAL

	CODE
plasterkit	90017106

1.0 LED111 HO

LED 15W | 220-240VAC | 50-60Hz
AC-COB 3-step | phase-cut dim
aluminium powder coated

0.65kg IP20 0.3-D 30°

141x145 35°/35° 355° 90 2-18

	CODE
	118378W
	118378S
	118378B

Light Colour Selection

	LUMEN CRI	CODE
2700K	1050 >80	2
3000K	1200 >80	4

OPTIONAL

	CODE
plasterkit	90017106

1.0 QR111

QR111 max.75W | G53
12V | excl. power supply
aluminium powder coated

0.41kg IP20 0.9-D

141x145 35°/35° 355° 90 2-18

	CODE
	118330W0
	118330S0
	118330B0

ALWAYS USE

power supply

	CODE
12V 10W dim	90221401
12V 25W dim	90221701
12V 70W dim	90221904

more specs on page 591




OPTIONAL

	CODE
plasterkit	90017106



STRANGE petit

CEILING RECESSED



1.0 LED

LED 6W | 350mA | 18V
COB 3-step | excl. power supply
aluminium powder coated

0.07kg IP20 \varnothing 0.3m A 31°

25°/25° 355° 47

CODE	
	163161W
	163161B

Light Colour Selection

LUMEN	CRI	CODE
2700K	580 >90	3
3000K	610 >90	5
1800-2700K 15V	360 >95	9

ALWAYS USE

plastic plasterkit \varnothing 65x65 \varnothing 10 or 13

CODE	
	90017200
	90017201

aluminium plasterkit \varnothing 64x64 \varnothing 7-7

	90017202
--	----------

power supply

CODE	
350mA 10W	90223401
350mA 10W dim	90223402

more power supplies on page 588

2.0 LED

2xLED 6W | 350mA | 18V
COB 3-step | excl. power supply
aluminium powder coated

0.13kg IP20 \varnothing 0.3m A 31°

25°/25° 355° 47

CODE	
	163261W
	163261B

Light Colour Selection

LUMEN	CRI	CODE
2700K	2x580 >90	3
3000K	2x610 >90	5
1800-2700K 15V	2x360 >95	9

ALWAYS USE

plastic plasterkit \varnothing 67x118 \varnothing 10 or 13

CODE	
	90017203
	90017204

aluminium plasterkit \varnothing 64x115 \varnothing 7-7

	90017205
--	----------

power supply

CODE	
350mA 10W	90223401
350mA 10W dim	90223402

more power supplies on page 588

3.0 LED

3xLED 6W | 350mA | 18V
COB 3-step | excl. power supply
aluminium powder coated

0.19kg IP20 \varnothing 0.3m A 31°

25°/25° 355° 47

CODE	
	163361W
	163361B

Light Colour Selection

LUMEN	CRI	CODE
2700K	3x580 >90	3
3000K	3x610 >90	5
1800-2700K 15V	3x360 >95	9

ALWAYS USE

plastic plasterkit \varnothing 68x168 \varnothing 10 or 13

CODE	
	90017206
	90017207

aluminium plasterkit \varnothing 64x167 \varnothing 7-7

	90017208
--	----------





power supply

CODE	
350mA 10W	90223401
350mA 10W dim	90223402

more power supplies on page 588




p. 587



STRANGE

CEILING RECESSED

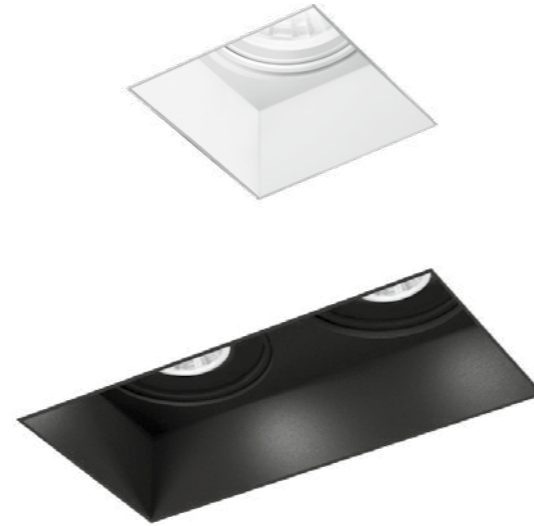

1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated
1800-2850K 16V

0.43kg IP20 35°/35° 355° 95°

86x86 35°/35° 355° 95°

1.0 PAR16

PAR16 max.12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.41kg IP20 35°/35° 355° 120°

86x86 35°/35° 355° 120°

2.0 LED

2xLED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated
1800-2850K 16V

0.74kg IP20 35°/35° 355° 95°

86x156 35°/35° 355° 95°

2.0 PAR16

2xPAR16 max.12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.70kg IP20 35°/35° 355° 120°

86x156 35°/35° 355° 120°

CODE
131161W
131161B

Light Colour Selection

LUMEN CRI	CODE
2700K 500/680 >90	3
3000K 520/710 >90	5
1800-2850K 320/430 >95	9

ALWAYS USE

plastic plasterkit 10 or 13

CODE
90017122
90017116

aluminium plasterkit 4-25

90017120

power supply

CODE
350mA 10W 90223401
500mA 10W 90214404
500mA 15W dim 90224501

more power supplies on page 588

CODE
13120W0
13120B0

ALWAYS USE

plastic plasterkit 10 or 13

CODE
90017122
90017116

aluminium plasterkit 4-25

90017120

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

CODE
2700K 901228W2
3000K 901228W4
1800-2850K 901229S9

more lamps and specs on page 593

CODE
131261W
131261B

Light Colour Selection

LUMEN CRI	CODE
2700K 2x500/680 >90	3
3000K 2x520/710 >90	5
1800-2850K 2x320/430 >95	9

ALWAYS USE

plastic plasterkit 10 or 13

CODE
90017123
90017117

aluminium plasterkit 4-25

90017121

power supply

CODE
350mA 10W 90223401
500mA 10W 90214404
500mA 15W dim 90224501

more power supplies on page 588

CODE
131220W0
131220B0

ALWAYS USE

plastic plasterkit 10 or 13

CODE
90017123
90017117

aluminium plasterkit 4-25

90017121

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim


CODE
2700K 901228W2
3000K 901228W4
1800-2850K 901229S9

more lamps and specs on page 593



LUNA ROUND IP44

CEILING RECESSED



1.0 LED HV

LED 7W | 220-240VAC
PCB 3-step | incl. PS | phase-cut dim
aluminium | stainless steel
opal cover | polyamide | PMMA

0.18kg | IP44 | 0.3-1 | P

76 | 50 | 2-25

3000K | >90 CRI | 350lm


Color	CODE
White	114388W5
Grey	114388M5
Black	114388B5

OPTIONAL

dimmer

	CODE
for switch	90019017
for din rail	90019018

more specs on page 591



1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium | stainless steel
opal glass | polyamide

0.19kg | IP44 | 0.3-1 | G

80 | 100 | 2-25

Color	CODE
White	114381W
Grey	114381M
Black	114381B

Light Colour Selection

LUMEN CRI	CODE
2700K 370/500 >90	3
3000K 390/520 >90	5
1800-2850K 16V 230/320 >95	9

ALWAYS USE

power supply

	CODE
350mA 10W	90223401
500mA 10W	90214404
500mA 15W dim	90224501

more power supplies on page 588

OPTIONAL

	CODE
recessed housing	90012026
plasterkit	90017101



1.0 PAR16

PAR16 max.10W | GU10
100-240VAC | 50-60Hz
aluminium | stainless steel
opal glass | polyamide

0.24kg | IP44 | 0.9-1 | G

80 | 120 | 2-25

Color	CODE
White	114120W0
Grey	114120M0
Black	114120B0


OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593

	CODE
recessed housing	90012026
plasterkit	90017101



1.0 MR16

QR-CBC51 max.10W | GU5.3
12V | excl. power supply
aluminium | stainless steel
opal glass | polyamide

0.28kg | IP44 | 0.9-1 | G

80 | 100 | 2-25

Color	CODE
White	114110W0
Grey	114110M0
Black	114110B0

ALWAYS USE

power supply

	CODE
12V 10W dim	90221401
12V 25W dim	90221701
12V 70W dim	90221904

more specs on page 591


OPTIONAL

	CODE
recessed housing	90012026
plasterkit	90017101



LUNA SQUARE IP44

CEILING RECESSED



1.0 LED HV

LED 7W | 220-240VAC
PCB 3-step | incl. PS | phase-cut dim
aluminium | stainless steel
opal cover | polyamide | PMMA

0.19kg | IP44 | 2-3 | P

72x72 | 50 | 2-25

3000K | >90 CRI | 350lm


CODE	CODE
114488W5	114488M5
114488B5	

OPTIONAL

dimmer

CODE	CODE
90019017	90019018

more specs on page 591



1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium | stainless steel
opal glass | polyamide

0.20kg | IP44 | 2-3 | G

76x76 | 100 | 2-25

CODE	CODE
114481W	114481M
114481B	

Light Colour Selection

LUMEN CRI	CODE
2700K 370/500 >90	3
3000K 390/520 >90	5
1800-2850K 16V 230/320 >95	9

ALWAYS USE


power supply

CODE	CODE
90223401	90214404
90224501	

more power supplies on page 588

OPTIONAL

CODE	CODE
90012026	90017102



1.0 PAR16

PAR16 max.10W | GU10
100-240VAC | 50-60Hz
aluminium | stainless steel
opal glass | polyamide

0.26kg | IP44 | 2-3 | G

76x76 | 120 | 2-25

CODE	CODE
114220W0	114220M0
114220B0	

OPTIONAL


PAR16 LED GU10 7W
phase-cut dim

CODE	CODE
901228W2	901228W4
901229S9	

more lamps and specs on page 593

CODE	CODE
90012026	90017102

recessed housing
plasterkit



1.0 MR16

QR-CBC51 max.10W | GU5.3
12V | excl. power supply
aluminium | stainless steel
opal glass | polyamide

0.28kg | IP44 | 2-3 | G

76x76 | 100 | 2-25

CODE	CODE
114210W0	114210M0
114210B0	

ALWAYS USE

power supply

CODE	CODE
90221401	90221701
90221904	



more specs on page 591

OPTIONAL

CODE	CODE
90012026	90017102

recessed housing
plasterkit





1.0

LED 2/3W | 350/500mA | 6Vf
PCB 3-step | excl. power supply
aluminium powder coated
anodised

0.09kg IP20 0.3-16

70x70 35 12-18

3000K | >80 CRI | 160/210lm

	CODE
	145181W4
	145181A4
	145181B4

ALWAYS USE

power supply

	CODE
350mA 6W	90213202
500mA 6W	90214201

more power supplies on page 588

2.0

LED 2/3W | 350/500mA | 6Vf
PCB 3-step | excl. power supply
aluminium powder coated
anodised

0.09kg IP20 0.3-16

70x70 35 12-18

3000K | >80 CRI | 160/210lm

	CODE
	145281W4
	145281A4
	145281B4

ALWAYS USE

power supply



	CODE
350mA 6W	90213202
500mA 6W	90214201

more power supplies on page 588



SNEAK TRIM

CEILING RECESSED



1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated
1800-2850K 16V

0.19 kg IP20 0.3-1° 28°

74x78 35°/35° 355° 95 2-18

2.0 LED

2xLED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated
1800-2850K 16V

0.34 kg IP20 0.3-1° 28°

74x148 35°/35° 355° 95 2-18

	CODE
	155351W_
	155351B_

Light Colour Selection

	LUMEN	CRI	CODE
2700K	390/520	>90	3
3000K	400/540	>90	5
1800-2850K	240/330	>95	9

ALWAYS USE

power supply

	CODE
350mA 10W	90223401
500mA 10W	90214404
500mA 15W dim	90224501

more power supplies on page 588

	CODE
	155451W_
	155451B_

Light Colour Selection


	LUMEN	CRI	CODE
2700K	2x390/520	>90	3
3000K	2x400/540	>90	5
1800-2850K	2x240/330	>95	9

ALWAYS USE

power supply

	CODE
350mA 10W	90223401
500mA 10W	90214404
500mA 15W dim	90224501



more power supplies on page 588





SNEAK TRIMLESS

CEILING RECESSED




1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated
1800-2850K 16V

0.19 kg IP20 35°/35° 355° 95

86x86 35°/35° 355° 95



2.0 LED

2xLED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated
1800-2850K 16V

0.34 kg IP20 35°/35° 355° 95

86x156 35°/35° 355° 95

CODE	
155151W	155151B

Light Colour Selection

LUMEN	CRI	CODE
2700K	390/520 >90	3
3000K	400/540 >90	5
1800-2850K	240/330 >95	9

CODE	
155251W	155251B

Light Colour Selection

LUMEN	CRI	CODE
2700K	2x390/520 >90	3
3000K	2x400/540 >90	5
1800-2850K	2x240/330 >95	9

ALWAYS USE

plastic plasterkit 10 or 13

CODE	
90017122	90017116

aluminium plasterkit 4-25

90017120

power supply

CODE	
350mA 10W	90223401
500mA 10W	90214404
500mA 15W dim	90224501

more power supplies on page 588

ALWAYS USE

plastic plasterkit 10 or 13

CODE	
90017123	90017117


aluminium plasterkit 4-25

90017121

power supply

CODE	
350mA 10W	90223401
500mA 10W	90214404
500mA 15W dim	90224501

more power supplies on page 588







HIDE

CEILING RECESSED



p. 587



1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium powder coated

0.45kg IP20 β -0.3 α 36°

45/45° \downarrow 10° β 125 α 4-25

	CODE
	117161W
	117161S
	117161B

Light Colour Selection

	LUMEN	CRI	CODE
2700K	540/730	>90	3
3000K	560/710	>90	5
1800-2850K	16V 340/460	>95	9

ALWAYS USE

power supply

	CODE
350mA 10W	90223401
500mA 10W	90214404
500mA 15W dim	90224501

more power supplies on page 588

1.0 PAR16

PAR16 max.12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.41kg IP20 β -0.9 α

45/45° \downarrow 13° β 125 α 4-25

	CODE
	117120W0
	117120S0
	117120B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593

ALWAYS USE

recessed housing + plasterkit

one lamp | 111x111x117mm

β 115x115 β 125 α 4-25

	CODE
	90012009
	90012017

two lamps | 208x111x117mm

β 212x115 β 125 α 4-25

	CODE
	90012010
	90012018

three lamps | 302x111x117mm

β 306x115 β 125 α 4-25


	CODE
	90012011
	90012019


four lamps | 398x111x117mm

β 402x115 β 125 α 4-25

	CODE
	90012012
	90012020

more information on page 601



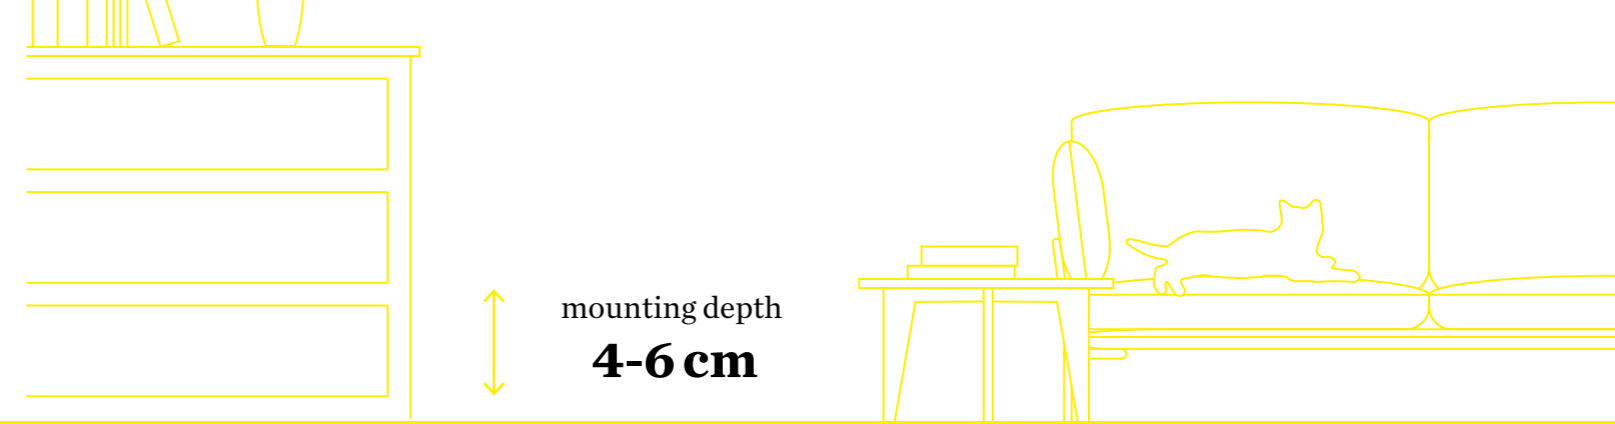

HIDDEN CHAMPIONS

FLAT'N'FANCY

Sleek built-in luminaires like CITY, RINI, LITO and LUNA are subtle, elegant and let every room shine in the brightest light. No wonder the space-saving allrounders are among the most popular lighting choices these days. Nevertheless: There are some requirements you'll need to consider when mounting recessed luminaires. Especially low ceilings in modern living spaces or too little space in the suspended ceilings can be really tricky – and every centimetre counts! The solution: extra low recessed ceiling luminaires by Wever & Ducré. The small, compact lights have been specifically designed for low ceilings with low installation depths and are not only true spacesavers, but also a design highlight – perfect for renovation projects and small city apartments.

HOCH HINAUS

Schlichte Einbauleuchten wie CITY, RINI, LITO und LUNA halten sich optisch elegant im Hintergrund, während sie jeden Raum in seinem besten Licht erstrahlen lassen. Kein Wunder also, dass die platzsparenden Alleskönner so beliebt sind. Trotzdem: Gewisse Voraussetzungen müssen für den Einbau gegeben sein. Denn vor allem mit niedrigen Deckenhöhen in modernen Wohnräumen oder zu wenig Platz in den Zwischendecken kann es schon mal ganz schön knifflig werden – dabei zählt jeder Zentimeter. Die Lösung: besonders flache Einbauleuchten von Wever & Ducré. Die kleinen, kompakten Leuchten wurden speziell für niedrige Räume mit wenig Einbautiefe entwickelt und sind nicht nur platzsparend, sondern vor allem auch ein echtes Designhighlight – perfekt für Renovierungsprojekte und kleine City-Apartments.






back



CITY IP44

UPDATE

CEILING RECESSED



1.6

LED 13W | 220-240VAC | 50-60Hz
incl. PS | phase-cut dim
aluminium powder coated
opal PMMA cover

0.64 kg IP44

202 50 4-30

2.6

LED 18W | 220-240VAC | 50-60Hz
incl. PS | phase-cut dim
aluminium powder coated
opal PMMA cover

1.05 kg IP44

297 50 4-30

3.5

LED 32W | 220-240VAC | 50-60Hz
incl. PS | phase-cut dim
aluminium powder coated
opal PMMA cover

1.70 kg IP44

387 50 4-30

CODE
115184W

CODE
115284W

CODE
115384W

Light Colour Selection


	LUMEN CRI	CODE
2700K	770 >90	3
3000K	840 >90	5

Light Colour Selection





	LUMEN CRI	CODE
2700K	1160 >90	3
3000K	1260 >90	5

Light Colour Selection

	LUMEN CRI	CODE
2700K	1730 >90	3
3000K	1850 >90	5



back

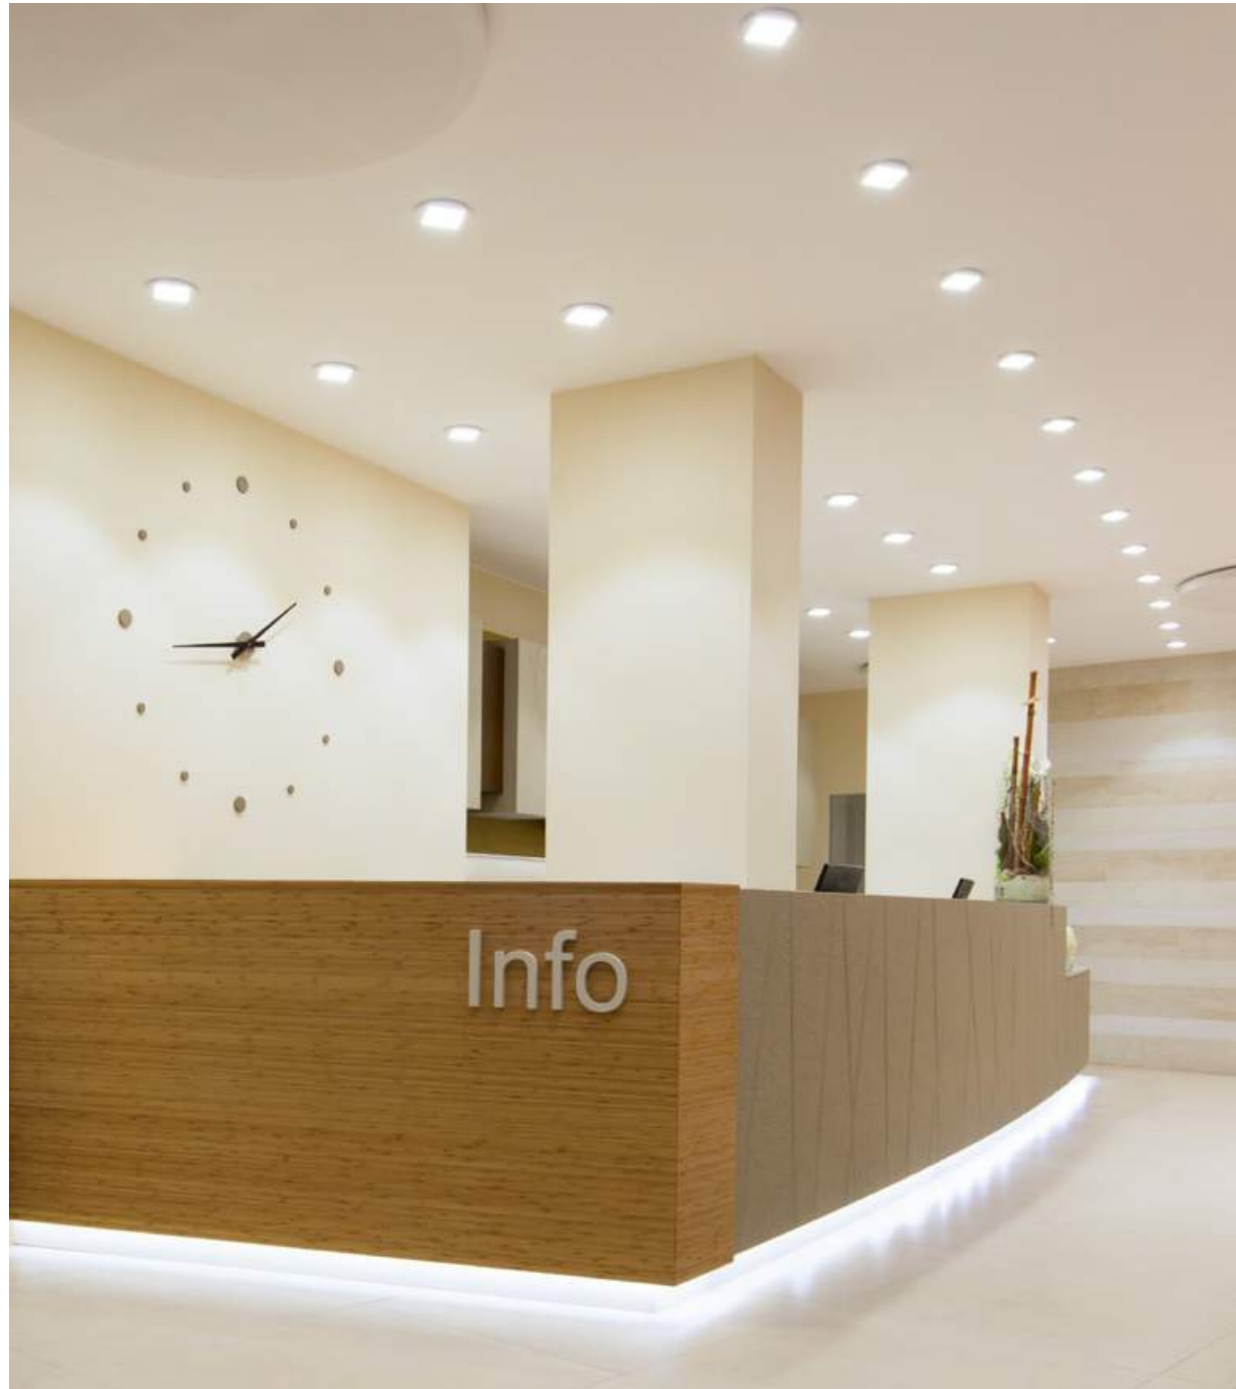

1.3

LED 8W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
Corian® glacier white | aluminium

0.47kg | IP20 | 3-0.3-1

68 | 70 | 4-40

3000K | >85 CRI | 930lm

CODE

126274W4

1.6

LED 12W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
Corian® glacier white | aluminium

0.52kg | IP20 | 3-0.3-1

68 | 70 | 4-40

3000K | >85 CRI | 1550lm

CODE

126374W4

3000K | >85 CRI | 1500lm | IP44 | no dim

CODE

147373W4

1.9

LED 14W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
Corian® glacier white | aluminium

0.63kg | IP20 | 3-0.3-1

68 | 70 | 4-40

3000K | >85 CRI | 1820lm

CODE

126474W4

2.6

LED 16W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
Corian® glacier white | aluminium






0.99kg | IP20 | 3-0.3-1

86 | 70 | 4-40

3000K | >85 CRI | 2130lm

CODE

126674W4

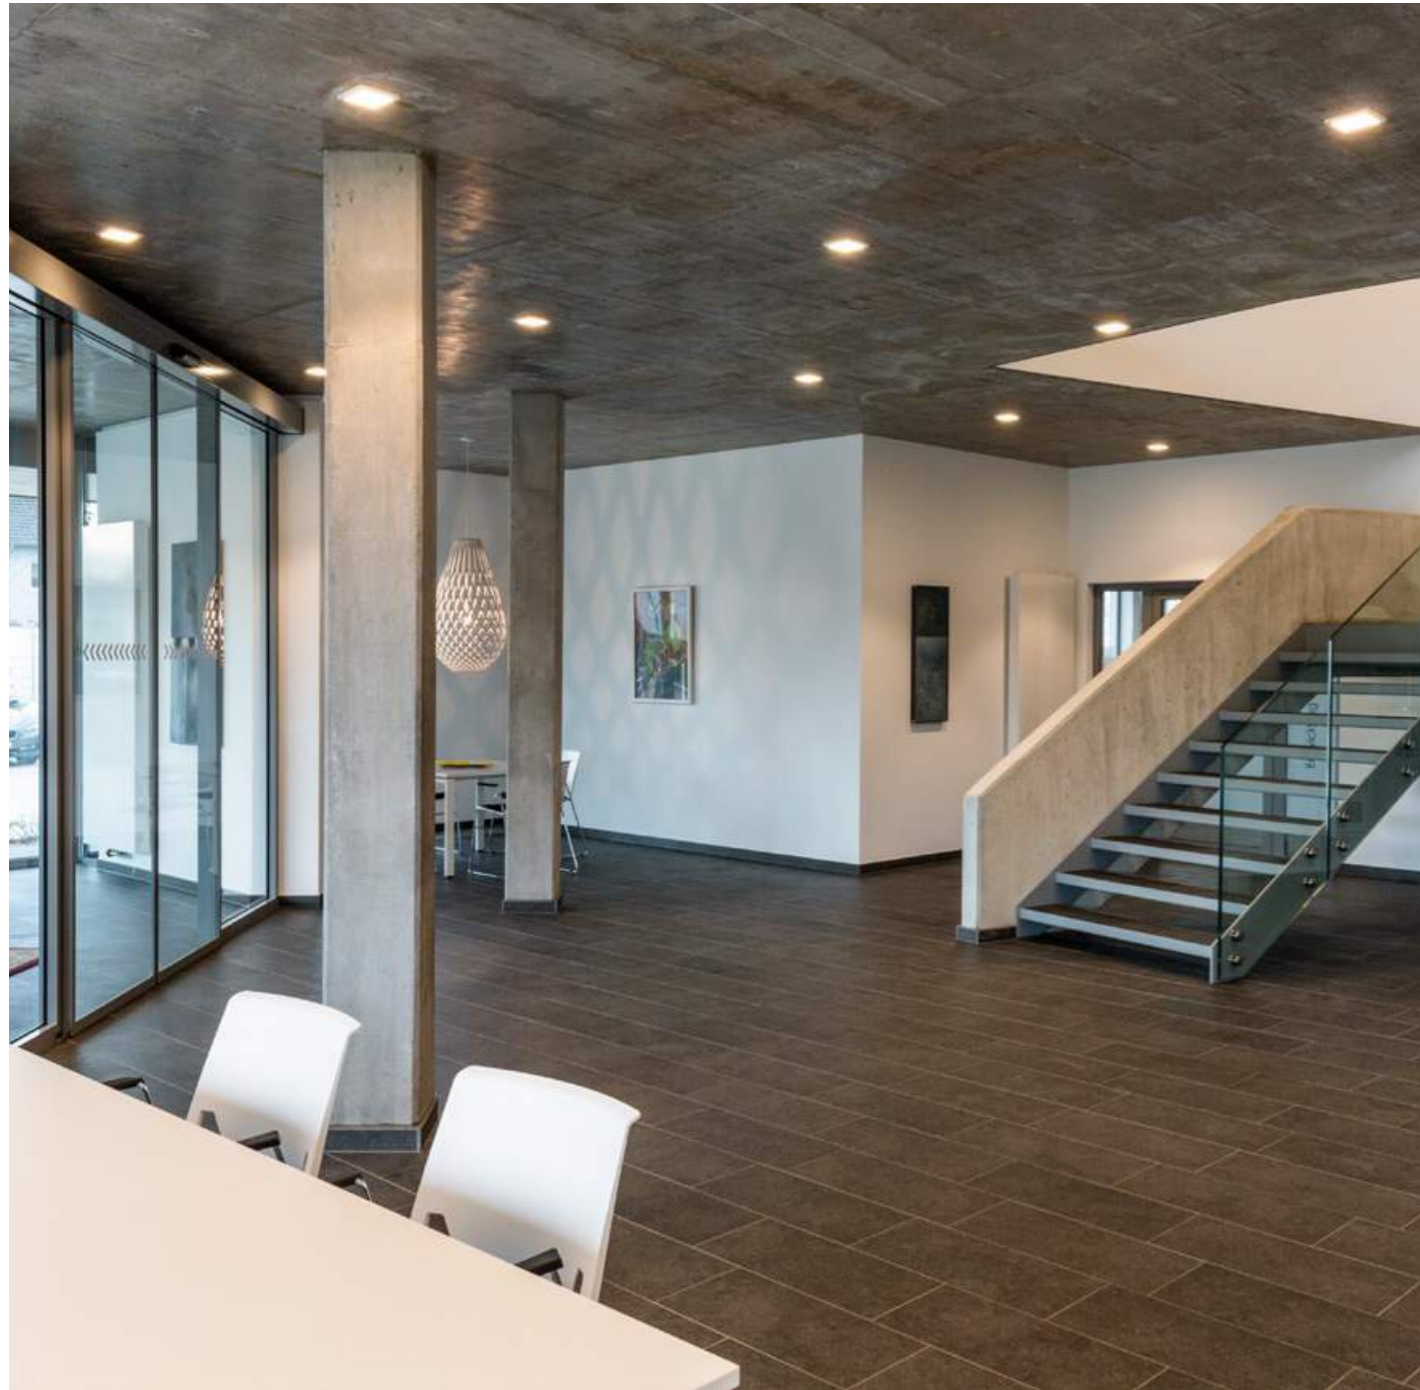

1.1

LED 8W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
Corian® glacier white | aluminium

0.37kg IP20 \approx 0.3m

68 70 4-40

3000K | >85 CRI | 783lm

CODE

127374W4

1.3

LED 12W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
Corian® glacier white | aluminium

0.43kg IP20 \approx 0.3m

68 70 4-40

3000K | >85 CRI | 1550lm

CODE

127474W4

2.0

LED 16W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
Corian® glacier white | aluminium

0.79kg IP20 \approx 0.3m

86 70 4-40

3000K | >85 CRI | 2130lm

CODE

127774W4

2.5

LED 20W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
Corian® glacier white | aluminium

1.21kg IP20 \approx 0.3m

86 70 4-40

3000K | >85 CRI | 2810lm


CODE

127874W4

3000K | >85 CRI | 1500lm | IP44 | no dim

CODE

148473W4








MIRBI IP44 2019

CEILING RECESSED



p. 279 p. 415



1.0

LED 7W | 220-240VAC
PCB 3-step | phase-cut dim
clear + opal PMMA cover

0.24kg | IP44 | >90 CRI | >25

76 | 50 | 2-25

3000K | >90 CRI | 440lm

	CODE
	11458805

OPTIONAL

	CODE
recessed housing	90012026
plasterkit	90017101

dimmer	
	CODE
for switch	90019017
for din rail	90019018

more specs on page 591

2.0

LED 7W | 220-240VAC
PCB 3-step | phase-cut dim
clear + opal PMMA cover

0.26kg | IP44 | >90 CRI | >25

72x72 | 50 | 2-25

3000K | >90 CRI | 440lm

	CODE
	11468805

OPTIONAL

	CODE
recessed housing	90012026
plasterkit	90017102

dimmer	
	CODE
for switch	90019017
for din rail	90019018

more specs on page 591

3.0

LED 20W | 220-240VAC
PCB 3-step | phase-cut dim
clear + opal PMMA cover

2.00kg | IP44 | >90 CRI | >25

230x230 | 50 | 2-25

3000K | >90 CRI | 1200lm

	CODE
	11478805


OPTIONAL

	CODE
recessed housing	90012045
plasterkit	90017124

dimmer	
	CODE
for switch	90019017
for din rail	90019018

more specs on page 591

available from autumn 2019





back



SPYDER

CEILING RECESSED



1.0 LED

LED 7/10W | 350/500mA | 18Vf
COB 3-step | excl. power supply
aluminium | steel powder coated

1.10kg IP20 0.3-1 36°
145 85° 355° 90° 4-25

	CODE
	124161W_
	124161E_

Light Colour Selection

	LUMEN CRI	CODE
2700K	480/650 >90	3
3000K	500/680 >90	5
1800-2850K 16V	310/410 >95	9

ALWAYS USE

power supply

	CODE
350mA 10W	90223401
500mA 10W	90214404
500mA 15W dim	90224501

more power supplies on page 588

1.0 PAR16

PAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium | steel powder coated

1.10kg IP20 0.3-1
145 85° 355° 90° 4-25

	CODE
	124120W0
	124120E0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593



SPINEO

CEILING RECESSED



p. 587



1.0 LED

LED AC MOD 8W | 220-240V
COB 3-step | incl. PS | phase cut dim
aluminium powder coated

0.20kg IP20 3-0,3-D 36°

80 28°/28° 355° 70 4-18

wire springs

	CODE
	160168W_
	160168B_

blade springs

	CODE
	160168W_C
	160168B_C

Light Colour Selection

	LUMEN	CRI	CODE
2700K	480	>90	3
3000K	500	>90	5

fits into Kaiser ThermoX® 9320-21



1.0 MR16

QR-CBC51 max.35W | GU5.3
12V | excl. power supply
aluminium powder coated
matt chrome

0.14kg IP20 3-0,9-D

80 35°/35° 355° 70 4-18

wire springs

	CODE
	160110W0
	160110B0

blade springs


	CODE
	160110W0C
	160110B0C

ALWAYS USE

	CODE
power supply	
12V 10W dim	90221401
12V 25W dim	90221701
12V 70W dim	90221904

more specs on page 591

fits into Kaiser ThermoX® 9320-21



1.0 PAR16

PAR16 max.12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
matt chrome

0.18kg IP20 3-0,9-D

80 35°/35° 355° 70 4-18

wire springs

	CODE
	160120W0
	160120B0

blade springs

	CODE
	160120W0C
	160120B0C

OPTIONAL


	CODE
PAR16 LED GU10 7W phase-cut dim	
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593
fits into Kaiser ThermoX® 9320-21



NOP petit

CEILING RECESSED



1.0 LED

LED 6W | 350mA | 18V
 COB 3-step | excl. power supply
 aluminium powder coated
 round cut out for mounting

0.18kg IP20 0.3m 34°

68 35°/35° 355° 60 4-15

CODE

	130561W_
	130561S_
	130561B_

blade springs

CODE

	130561W_C
	130561S_C
	130561B_C

Light Colour Selection

	LUMEN	CRI	CODE
2700K	560	>90	3
3000K	580	>90	5
1800-2700K 15V	350	>95	9





ALWAYS USE

power supply

CODE

350mA 10W	90223401
350mA 10W dim	90223402

more power supplies on page 588
 fits into Kaiser ThermoX® 9320-11



NOP

CEILING RECESSED



p. 587

1.0 LED

LED AC MOD 8W | 220-240V
COB 3-step | incl. PS | phase cut dim
aluminium powder coated
round cut out for mounting

0.26kg IP20 30°/50° 355° 95 4-32

82 30°/50° 355° 95 4-32

	CODE
	130468W_
	130468S_
	130468B_

blade springs 86

	CODE
	130468W_C
	130468S_C
	130468B_C

Light Colour Selection

	LUMEN	CRI	CODE
2700K	480	>90	3
3000K	500	>90	5

fits into Kaiser ThermoX® 9320-21

1.0 MR16

QR-CBC51 max.35W | GU5.3
12V | excl. power supply
aluminium powder coated
round cut out for mounting

0.11kg IP20 35°/35° 76 4-32

82 35°/35° 76 4-32

	CODE
	130410W0
	130410S0
	130410B0

blade springs 86

	CODE
	130410WOC
	130410SOC
	130410B0C

ALWAYS USE

power supply

	CODE
12V 10W dim	90221401
12V 25W dim	90221701
12V 70W dim	90221904

more specs on page 591

fits into Kaiser ThermoX® 9320-21

1.0 PAR16

PAR16 max.12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
round cut out for mounting

0.14kg IP20 35°/35° 83 4-32

82 35°/35° 83 4-32

	CODE
	130420W0
	130420S0
	130420B0

blade springs 86

	CODE
	130420WOC
	130420SOC
	130420B0C

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593


fits into Kaiser ThermoX® 9320-21

CEILING SURFACE


p. 233 – 305



Explore our Designer Families from p. 23 -147

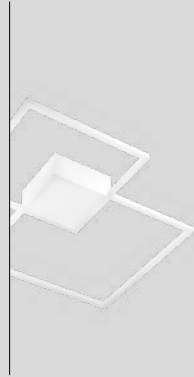

VENN
p. 233

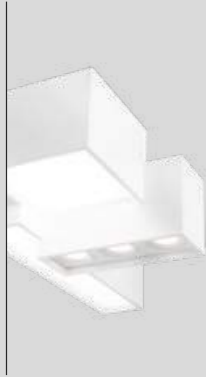

BEBOW
p. 235



SOLID
p. 239



SIRRA
p. 243



SIRRO
p. 245



BOX
p. 249



DOCUS
p. 255



HEXO
p. 259



RAY
p. 265



ROB IP44
p. 269



ROBY IP44
p. 271



TOWNA IP44
p. 273



SARA ON TRACK
p. 285



TORCO ON TRACK
p. 287




CORY
p. 275



CORO
p. 277



MIRBI IP44 1.0
p. 279



MIRBI IP44 3.0
p. 279



PLUXO ON TRACK
p. 281




SARA ON BASE
p. 283



SQUBE ON BASE
p. 289






SQUBE ON TRACK
p. 295

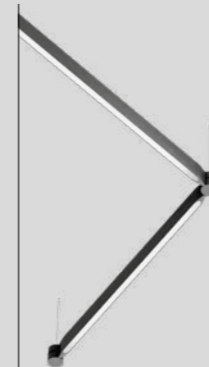

ELLO SYSTEM
p. 303

back

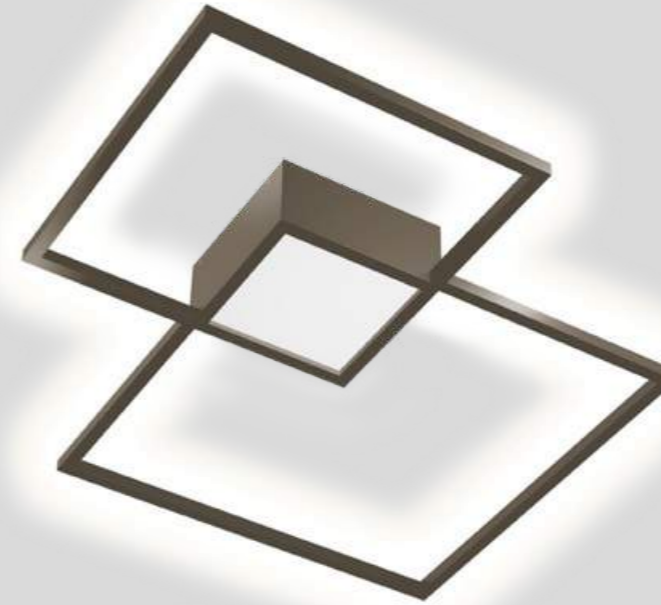

VENN UPDATE

CEILING SURFACE



p. 337 p. 399

1.0

LED 38W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated
opal PMMA cover | indirect light

2.50kg IP20 \pm 0.3° P

CODE
149184W_
149184Q_
149184B_

DALI

CODE
149185W_
149185Q_
149185B_

Light Colour Selection

LUMEN CRI	CODE
2700K 2100 >80	2
3000K 2250 >80	4

2.0

LED 47W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated
opal PMMA cover | dir./indir. light

2.50kg IP20 \pm 0.3° P


CODE
149284W_
149284Q_
149284B_

DALI

CODE
149285W_
149285Q_
149285B_

Light Colour Selection

LUMEN CRI	CODE
2700K 370/2100 >80	2
3000K 400/2250 >80	4






SHOWROOM | GRANDO KEUKENS SINT-MARTENS-LATEM | BELGIUM

BEBOW UPDATE

CEILING SURFACE



p. 333



1.0

LED 35W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
opal cover | two circuits
aluminium powder coated
opal PMMA cover

6.30kg IP20 ± 0.3

3000K | >90 CRI | 1820lm

	CODE
	132184W5
	132184B5




2.0

LED 55W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
opal cover + 3x spot | two circuits
aluminium powder coated
opal PMMA cover

6.70kg IP20 ± 0.3

3000K | >90 CRI | 2650lm

	CODE
	132164W5
	132164B5






BEBOW UPDATE

CEILING SURFACE



p. 335

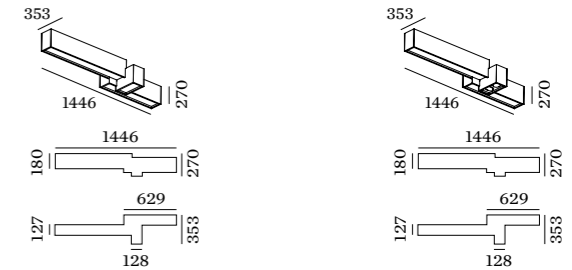

3.0

LED 35W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
opal cover | two circuits
aluminium powder coated
opal PMMA cover

8.00kg IP20 ± 0.3

3000K | >90 CRI | 1910lm

	CODE
	132284W5
	132284B5


4.0

LED 48W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
opal cover + 2x spot | two circuits
aluminium powder coated
opal PMMA cover

8.30kg IP20 ± 0.3

3000K | >90 CRI | 2350lm

	CODE
	132264W5
	132264B5





SOLID

CEILING SURFACE



p. 587



1.0 LED

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated


0.65kg IP20 $\pm 0,3 \cdot D$ $\Delta 36^\circ$

$\angle 25^\circ/25^\circ$ $\psi 355^\circ$

Color	CODE
White	133164W_
Gold	133164J_
Black	133164K_
Dark Grey	133164P_
Light Grey	133164Q_
Dark Grey	133164B_

Light Colour Selection

Color	LUMEN	CRI	CODE
2700K	470	>90	3
3000K	470	>90	5
1800-2850K	410	>95	9



1.0 PAR16

PAR16 max.12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.61kg IP20 $\pm 0,9 \cdot D$

$\angle 25^\circ/25^\circ$ $\psi 355^\circ$

Color	CODE
White	133120W0
Gold	133120J0
Black	133120K0
Dark Grey	133120P0
Light Grey	133120Q0
Dark Grey	133120B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

Color	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593





PRIVATE RESIDENCE | SPADO ARCHITECTS AUSTRIA



OFFICE AVENO ANTWERPEN | BELGIUM
back

WEVER & DUCRÉ 240 – 241





SIRRA

CEILING SURFACE



p. 587



1.0 LED

LED 10W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.86kg | IP20 | 0,3° | 36°

35°/35° | 355°

	CODE
	134164W_
	134164E_
	134164F_
	134164B_

Light Colour Selection

	LUMEN CRI	CODE
2700K	590 >90	3
3000K	640 >90	5
1800-2850K 16V	440 >95	9

1.0 PAR16

PAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.74kg | IP20 | 0,9°

35°/35° | 355°

	CODE
	134120W0
	134120E0
	134120F0
	134120B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593





SIRRO

CEILING SURFACE



p. 587



1.0 LED

LED 10W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.85kg IP20 3-0,3-D P A-36°

35°/35° 355°

1.0 PAR16

PAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.81kg IP20 3-0,9-D

35°/35° 355°

	CODE
	139164W_
	139164E_
	139164F_
	139164B_

	CODE
	139120W0
	139120E0
	139120F0
	139120B0

Light Colour Selection


	LUMEN CRI	CODE
2700K	590 >90	3
3000K	640 >90	5
1800-2850K 16V	440 >95	9

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593



2.0 LED

2xLED 10W | 220-240VAC
50-60Hz | COB 3-step
incl. PS | phase-cut dim
aluminium powder coated
brushed


1.57kg IP20 0.3-1 P 36°

35°/35° 355°

	CODE
	139264W
	139264E
	139264F
	139264B

Light Colour Selection

	LUMEN	CRI	CODE
2700K	2x590	>90	3
3000K	2x640	>90	5
1800-2850K 16V	2x440	>95	9



2.0 PAR16

2xPAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

1.51kg IP20 0.9-1

35°/35° 355°


	CODE
	139220W0
	139220E0
	139220F0
	139220B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593



3.0 LED

3xLED 10W | 220-240VAC
50-60Hz | COB 3-step
incl. PS | phase-cut dim
aluminium powder coated
brushed

2.21kg IP20 0.3-1 P 36°

35°/35° 355°

	CODE
	139364W
	139364E
	139364F
	139364B


Light Colour Selection

	LUMEN	CRI	CODE
2700K	3x590	>90	3
3000K	3x640	>90	5
1800-2850K 16V	3x440	>95	9

CODE

2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593



3.0 PAR16

3xPAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

1.51kg IP20 0.9-1

35°/35° 355°



	CODE
	139320W0
	139320E0
	139320F0
	139320B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim


	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593



BOX

CEILING SURFACE



1.0 LED

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.74kg IP20 30°-32°

CODE
146164W
146164L
146164G
146164Q
146164P
146164B

Light Colour Selection

LUMEN	CRI	CODE
2700K	580 >80	2
3000K	610 >80	4
1800-2850K	390 >95	9

1.0 PAR16

PAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.66kg IP20 30°-32°

CODE
146120W0
146120L0
146120G0
146120Q0
146120P0
146120B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

CODE
901228W2
901228W4
901229S9

more lamps and specs on page 593

OPTIONAL

single inner reflector max. 10W

CODE
911211W1
911211G1
911211B1





single inner cover max. 10W

CODE
911011W1
911011G1
911011B1







2.0 LED

2xLED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

1.08kg IP20 3-0,3-D 32°

Color	CODE
White	146264W
Grey	146264L
Gold	146264G
Brown	146264Q
Red	146264P
Black	146264B

Light Colour Selection

Color	LUMEN CRI	CODE
2700K	2x580 >80	2
3000K	2x610 >80	4
1800-2850K	2x390 >95	9

2.0 PAR16

2xPAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

1.13kg IP20 3-0,9-D

Color	CODE
White	146220W0
Grey	146220L0
Gold	146220G0
Brown	146220Q0
Red	146220P0
Black	146220B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

Color	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593

OPTIONAL


double inner reflector max. 10W

Color	CODE
White	911251W1
Gold	911251G1
Black	911251B1



single inner cover max. 10W
2 pieces needed

Color	CODE
White	911011W1
Gold	911011G1
Black	911011B1







DOCUS

CEILING SURFACE



p. 349



1.0 LED

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.63kg IP20 0.3+D P 32°

CODE	
	146364W
	146364L
	146364G
	146364P
	146364B

Light Colour Selection

LUMEN	CRI	CODE
2700K	580 >80	2
3000K	610 >80	4
1800-2850K	390 >95	9

1.0 PAR16

PAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.55kg IP20 0.9+D

CODE	
	146320W0
	146320L0
	146320G0
	146320P0
	146320B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

CODE	
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593

OPTIONAL

single inner cover max. 10W



CODE	
	911021W1
	911021G1
	911021B1





DOCUS

CEILING SURFACE



2.0 LED

2xLED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.92kg IP20 \pm 0.3° \pm 32°

Color	CODE
White	146464W
Grey	146464L
Gold	146464G
Red	146464P
Black	146464B

Light Colour Selection

Color	LUMEN	CRI	CODE
2700K	2x580	>80	2
3000K	2x610	>80	4
1800-2850K	2x390	>95	9

2.0 PAR16

2xPAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

1.01kg IP20 \pm 0.9°

Color	CODE
White	146420W0
Grey	146420L0
Gold	146420G0
Red	146420P0
Black	146420B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

Color	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593

OPTIONAL

single inner cover max. 10W
2 pieces needed

Color	CODE
White	911021W1
Gold	911021G1
Black	911021B1







HEXO

CEILING SURFACE



p. 351



1.0 LED

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.72kg IP20 $\approx 0,3 \cdot D$ $\approx 32^\circ$

Color	CODE
White	146564W
Gold	146564G
Dark Gold	146564Q
Dark Red	146564P
Black	146564B

Light Colour Selection

LUMEN	CRI	CODE
2700K	580 >80	2
3000K	610 >80	4
1800-2850K	390 >95	9

1.0 PAR16

PAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.63kg IP20 $\approx 0,9 \cdot D$

Color	CODE
White	146520W0
Gold	146520G0
Dark Gold	146520Q0
Dark Red	146520P0
Black	146520B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim


Color	CODE
White	901228W2
Gold	901228W4
Dark Gold	901229S9

more lamps and specs on page 593

OPTIONAL

single inner cover max. 10W




Color	CODE
White	911031W1
Gold	911031G1
Dark Gold	911031B1





HEXO

CEILING SURFACE

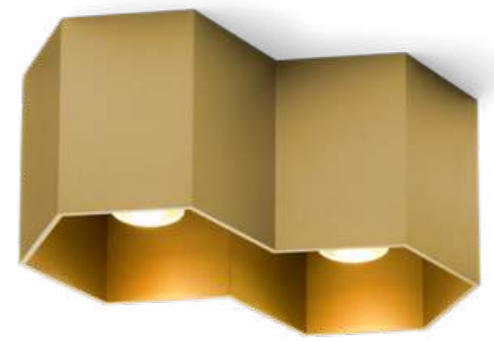

2.0 LED

2xLED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

1.13kg IP20 \pm 0,3+D P Δ 32°

Color	CODE
White	146664W
Gold	146664G
Brown	146664Q
Red	146664P
Black	146664B

Light Colour Selection

LUMEN	CRI	CODE
2700K	2x580 >80	2
3000K	2x610 >80	4
1800-2850K	2x390 >95	9

2.0 PAR16

2xPAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

1.19kg IP20 \pm 0,9+D

Color	CODE
White	146620W0
Gold	146620G0
Brown	146620Q0
Red	146620P0
Black	146620B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

Color	CODE
White	901228W2
Gold	901228W4
Black	901229S9

more lamps and specs on page 593

OPTIONAL

single inner cover max. 10W
2 pieces needed

Color	CODE
White	911031W1
Gold	911031G1
Black	911031B1










RAY

CEILING SURFACE



1.0 LED

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.70kg IP20 3-0,3-D 32°

CODE
146764W
146764L
146764G
146764Q
146764P
146764B

Light Colour Selection

LUMEN	CRI	CODE
2700K	580 >80	2
3000K	610 >80	4
1800-2850K	390 >95	9

1.0 PAR16

PAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.61kg IP20 3-0,9-D

CODE
146720W0
146720L0
146720G0
146720Q0
146720P0
146720B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

CODE
901228W2
901228W4
901229S9

more lamps and specs on page 593

OPTIONAL

single inner cover max. 10W

CODE
911041W1
911041G1
911041B1









ROB IP44 UPDATE

CEILING SURFACE



p. 475



1.6

LED 13W | 220-240VAC | 50-60Hz
AC PCB 3-step low flicker
phase-cut dim | aluminium
powder coated | opal PMMA cover

0.70kg IP44

2700K | >90 CRI | 860lm

CODE
701184W3

3000K | >90 CRI | 950lm

CODE
701184W5

OPTIONAL

dimmer

CODE
for switch 90019017
for din rail 90019018

more specs on page 591

2.6

LED 18W | 220-240VAC | 50-60Hz
AC PCB 3-step low flicker
phase-cut dim | aluminium
powder coated | opal PMMA cover

1.20kg IP44

2700K | >90 CRI | 1250lm

CODE
701284W3

3000K | >90 CRI | 1380lm

CODE
701284W5

OPTIONAL

dimmer

CODE
for switch 90019017
for din rail 90019018

more specs on page 591

3.5

LED 32W | 220-240VAC | 50-60Hz
AC PCB 3-step low flicker
phase-cut dim | aluminium
powder coated | opal PMMA cover

1.90kg IP44

2700K | >90 CRI | 1820lm

CODE
701384W3

3000K | >90 CRI | 1950lm

CODE
701384W5

OPTIONAL

dimmer


CODE
for switch 90019017
for din rail 90019018

more specs on page 591



ROBY IP44 UPDATE

CEILING SURFACE

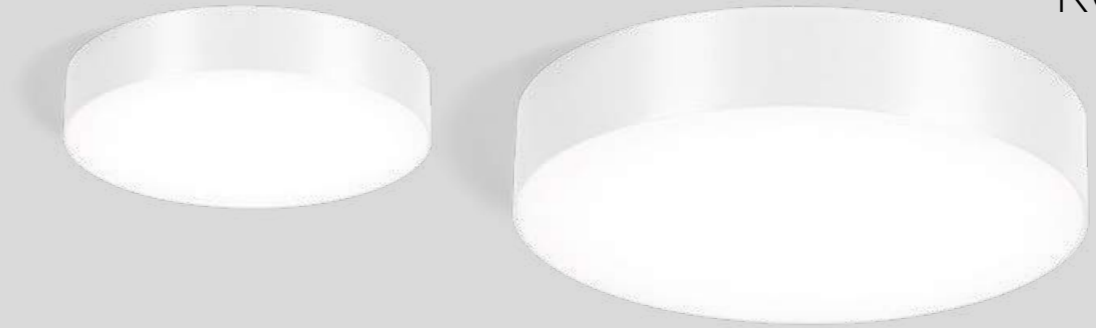

1.6

LED 13W | 220-240VAC | 50-60Hz
AC PCB 3-step low flicker
phase-cut dim | aluminium
powder coated brushed | opal
PMMA cover



2700K | >90 CRI | 750lm

	CODE
	135184W3
	135184B3

3000K | >90 CRI | 820lm

	CODE
	135184W5
	135184B5

OPTIONAL

dimmer

	CODE
for switch	90019017
for din rail	90019018

more specs on page 591



2.6

LED 18W | 220-240VAC | 50-60Hz
AC PCB 3-step low flicker
phase-cut dim | aluminium
powder coated brushed | opal
PMMA cover



2700K | >90 CRI | 1130lm

	CODE
	135284W3
	135284B3

3000K | >90 CRI | 1250lm


	CODE
	135284W5
	135284B5

OPTIONAL

dimmer

	CODE
for switch	90019017
for din rail	90019018

more specs on page 591



3.5

LED 32W | 220-240VAC | 50-60Hz
AC PCB 3-step low flicker
phase-cut dim | aluminium
powder coated brushed | opal
PMMA cover



2700K | >90 CRI | 1680lm

	CODE
	135384W3
	135384B3

3000K | >90 CRI | 1800lm


	CODE
	135384W5
	135384B5

OPTIONAL

dimmer

	CODE
for switch	90019017
for din rail	90019018

more specs on page 591






FORUM 1

TOWNA IP44 2019

CEILING SURFACE



1.0

LED 13W | 220-240VAC | 50-60Hz
AC PCB 3-step low flicker
phase-cut dim | steel wet painted
opal PMMA cover

1.15kg IP44 $\approx 0,3^\circ$

Color	CODE
White	178184W
Gold	178184J
Copper	178184P
Black	178184K
Dark Grey	178184Z
Light Grey	178184B

Light Colour Selection


LUMEN	CRI	CODE
2700K	780 >90	3
3000K	850 >90	5

OPTIONAL

dimmer

	CODE
for switch	90019017
for din rail	90019018

more specs on page 591



2.0

LED 18W | 220-240VAC | 50-60Hz
AC PCB 3-step low flicker
phase-cut dim | steel wet painted
opal PMMA cover

1.90kg IP44 $\approx 0,3^\circ$

Color	CODE
White	178284W
Gold	178284J
Copper	178284P
Black	178284K
Dark Grey	178284Z
Light Grey	178284B

Light Colour Selection


LUMEN	CRI	CODE
2700K	1090 >90	3
3000K	1210 >90	5

OPTIONAL

dimmer

	CODE
for switch	90019017
for din rail	90019018

more specs on page 591



3.0

LED 32W | 220-240VAC | 50-60Hz
AC PCB 3-step low flicker
phase-cut dim | steel wet painted
opal PMMA cover

3.00kg IP44 $\approx 0,3^\circ$

Color	CODE
White	178384W
Gold	178384J
Copper	178384P
Black	178384K
Dark Grey	178384Z
Light Grey	178384B

Light Colour Selection

LUMEN	CRI	CODE
2700K	1550 >90	3
3000K	1660 >90	5


OPTIONAL

dimmer

	CODE
for switch	90019017
for din rail	90019018

more specs on page 591

available from autumn 2019



back



1.3


LED 8W | 220-240VAC | 50-60Hz
PCB 3-step | incl. power supply
Corian® glacier white | aluminium

0.47kg IP20

3000K | >85 CRI | 930lm

CODE

136173W4



1.6


LED 9W | 220-240VAC | 50-60Hz
PCB 3-step | incl. power supply
Corian® glacier white | aluminium

0.52kg IP20

3000K | >85 CRI | 1160lm

CODE

136273W4



1.9


LED 14W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
Corian® glacier white | aluminium

0.63kg IP20

3000K | >85 CRI | 1820lm

CODE

136374W4



2.6

LED 16W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
Corian® glacier white | aluminium

0.99kg IP20

3000K | >85 CRI | 2130lm

CODE

136574W4




1.1

LED 8W | 220-240VAC | 50-60Hz
PCB 3-step | incl. power supply
Corian® glacier white | aluminium

0.37kg IP20

3000K | >85 CRI | 930lm

CODE
137173W4




1.3

LED 9W | 220-240VAC | 50-60Hz
PCB 3-step | incl. power supply
Corian® glacier white | aluminium

0.43kg IP20

3000K | >85 CRI | 1340lm

CODE
137273W4




2.0

LED 16W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
Corian® glacier white | aluminium

1.59kg IP20

3000K | >85 CRI | 2130lm

CODE
137674W4



2.5

LED 20W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
Corian® glacier white | aluminium

1.79kg IP20

3000K | >85 CRI | 2810lm

CODE
137774W4







MIRBI IP44 2019

CEILING SURFACE



p. 221

p. 415

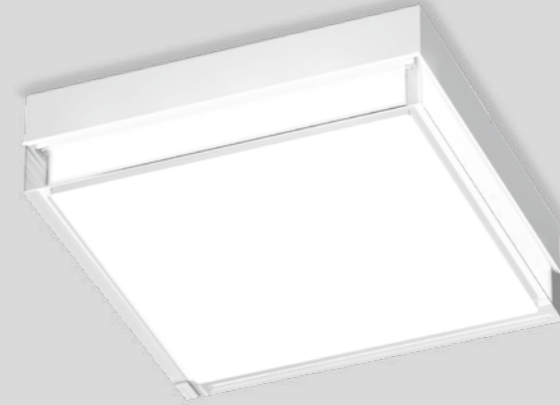

1.0

LED 7W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
wet painted PA housing
clear + opal PMMA cover



3000K | >90 CRI | 440lm

CODE

175188W5

2.0

LED 7W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
wet painted PA housing
clear + opal PMMA cover




3000K | >90 CRI | 440lm

CODE

175288W5

3.0

LED 20W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
wet painted PA housing
clear + opal PMMA cover




3000K | >90 CRI | 1200lm

CODE

175388W5

available from autumn 2019




back



PLUXO on track

CEILING SURFACE



1.0 LED111

LED 12W | 220-240VAC | 50-60Hz
AC-COB 3-step | phase-cut dim
aluminium powder coated
incl. 1-phase track adapter

0.93kg IP20 30°


45°/45° 45°/45°

	CODE
	143668W
	143668B

Light Colour Selection

	LUMEN CRI	CODE
2700K	680 >90	3
3000K	720 >90	5
1800-2850K	830 >80	9

more 1-phase track accessories on page 603



2.0 LED111

LED 12W | 220-240VAC | 50-60Hz
AC-COB 3-step | phase-cut dim
aluminium powder coated
incl. 3-phase track adapter

0.96kg IP20 30°


45°/45° 45°/45°

	CODE
	143968W
	143968B

Light Colour Selection

	LUMEN CRI	CODE
2700K	710 >90	3
3000K	730 >90	5
1800-2850K	830 >80	9

more 3-phase track accessories on page 605



2.0 LED111 HO

LED 15W | 220-240VAC | 50-60Hz
AC-COB 3-step | phase-cut dim
aluminium powder coated
incl. 3-phase track adapter

0.96kg IP20 30°


45°/45° 45°/45°

	CODE
	143978W
	143978B

Light Colour Selection

	LUMEN CRI	CODE
2700K	1050 >80	2
3000K	1200 >80	4


more 3-phase track accessories on page 605

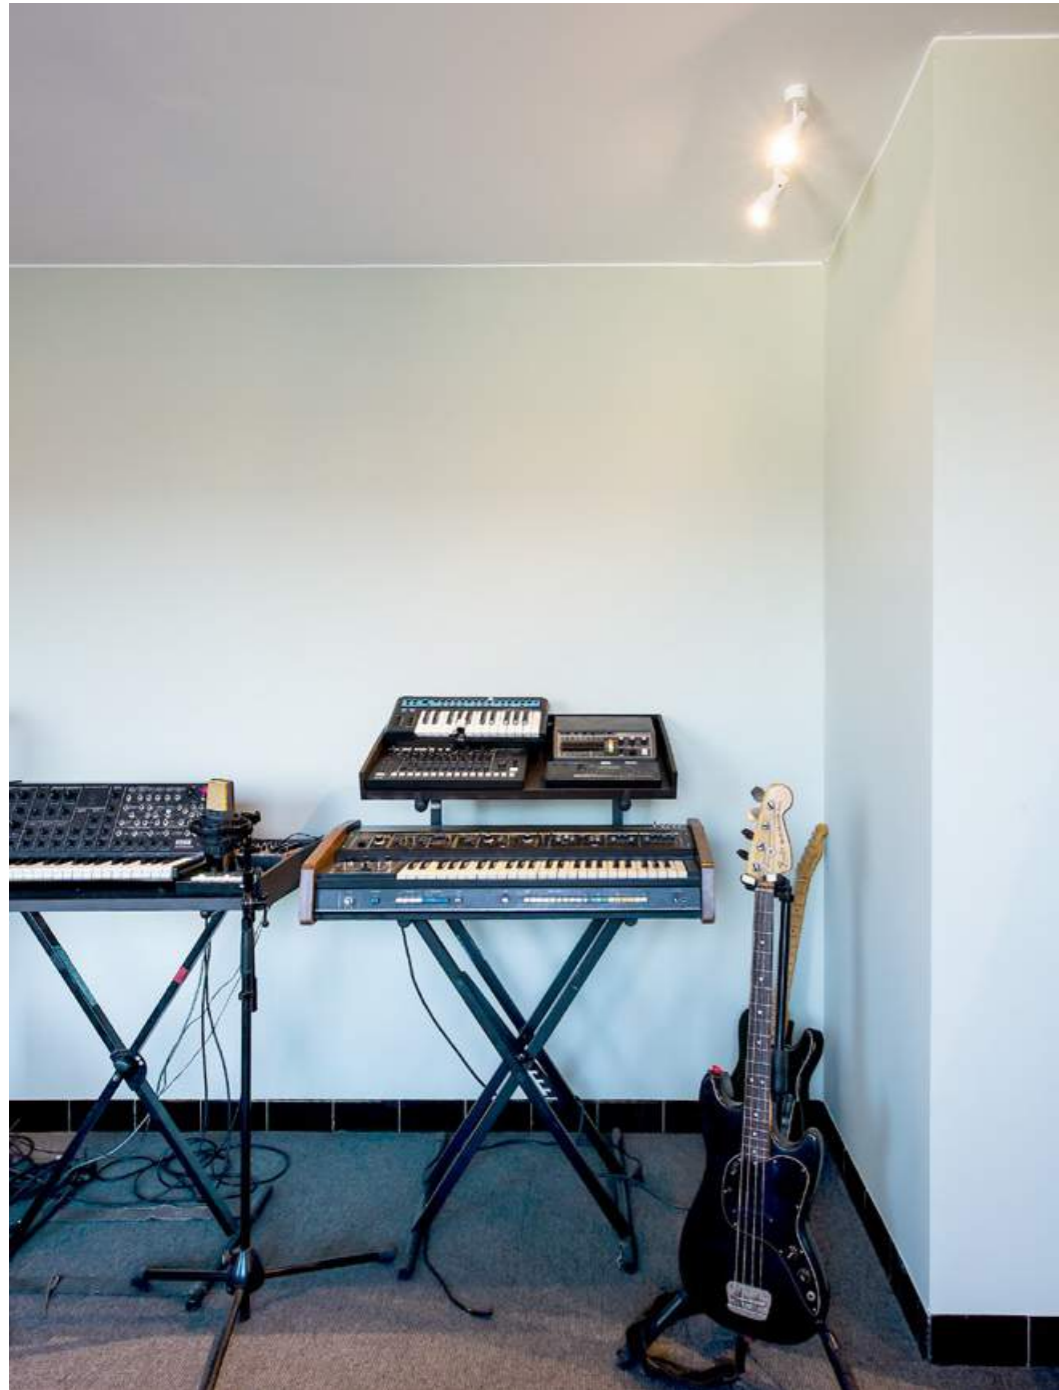

SAFARI STUDIOS | STEVEN VANDENBORRE KORTRIJK | BELGIUM

SARA on base

CEILING SURFACE



1.0 PAR16

PAR16 max.12W | GU10
100-240VAC
aluminium powder coated

0.23kg IP20 $\pm 0.9^\circ$

90°


CODE	
	157220W0
	157220G0
	157220B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

CODE	
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9



more lamps and specs on page 593





SARA on track

CEILING SURFACE



1.0 LED

LED 8W | 220-240VAC
COB 3-step | phase-cut dim
aluminium powder coated
incl. 1-phase track adapter

0.24kg IP20 34°

90° 355°

CODE
157164W
157164G
157164B

Light Colour Selection

	LUMEN CRI	CODE
2700K	500 >80	2
3000K	530 >80	4

OPTIONAL

dimmer
for switch 90019017
for din rail 90019018

more specs on page 591
more 1-phase track accessories on page 603

1.0 PAR16

PAR16 max.12W | GU10
100-240VAC
aluminium powder coated
incl. 1-phase track adapter

0.16kg IP20 34°

90° 355°


CODE
157120W
157120G
157120B

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim


	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593
more 1-phase track accessories on page 603

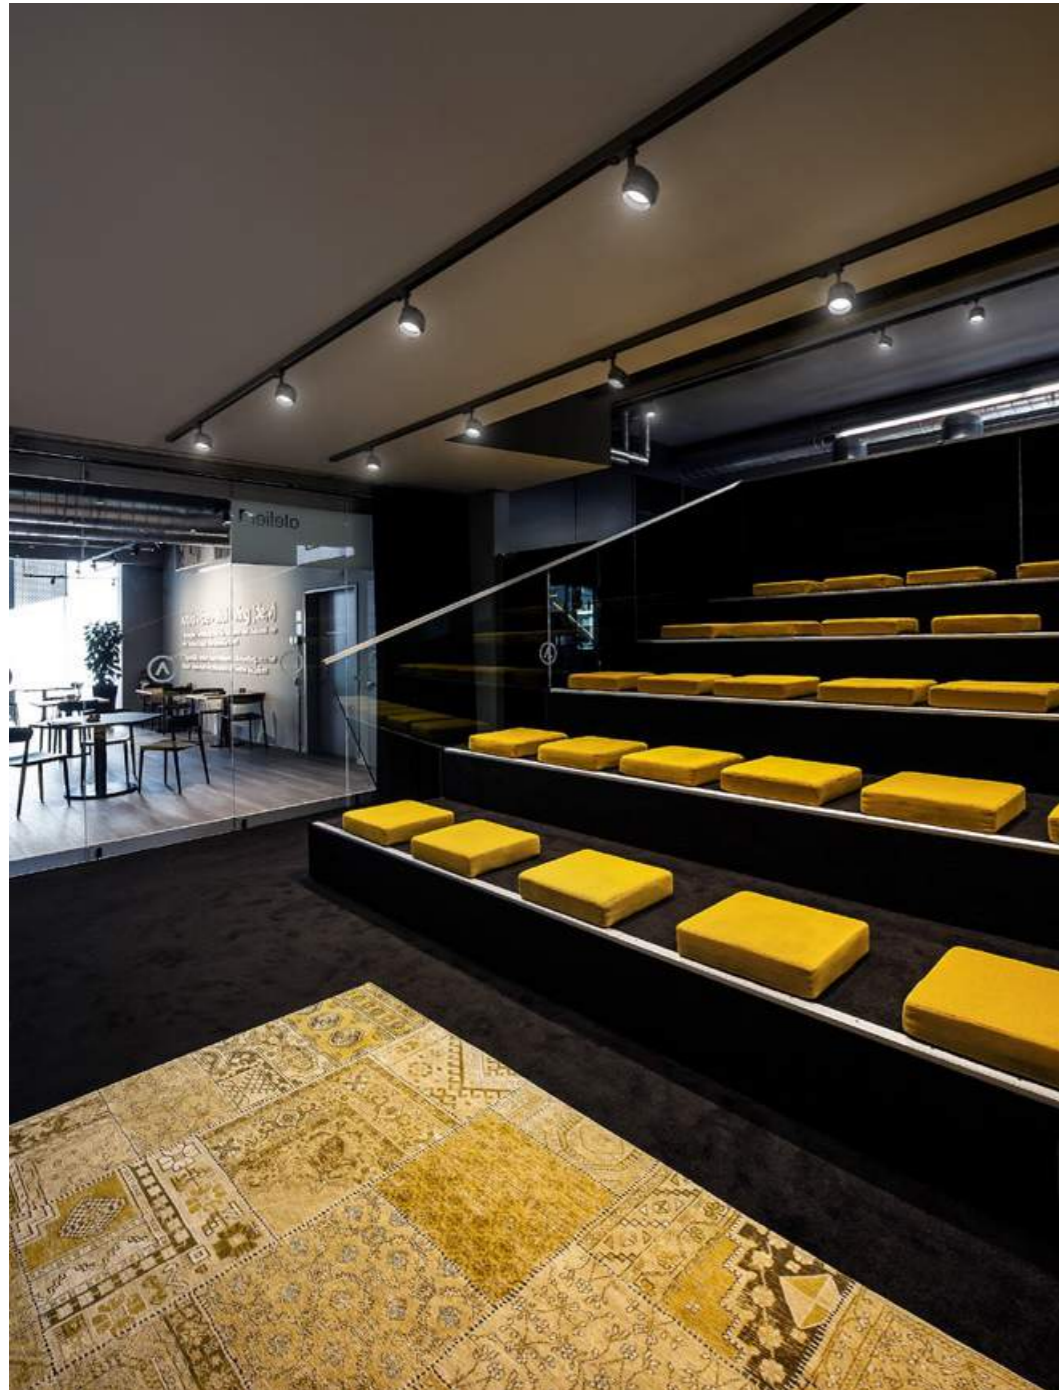

TORCO on track

CEILING SURFACE



1.0 LED

LED 15W | 220-240VAC
 COB 3-step | phase-cut dim
 aluminium powder coated
 incl. 3-phase track adapter

0.29kg IP20 40°

90° 355°

CODE	
	158168W_
	158168B_

Light Colour Selection

LUMEN	CRI	CODE
2700K	950 >80	2
3000K	1050 >80	4

OPTIONAL

dimmer

CODE	
for switch	90019017
for din rail	90019018



more specs on page 591

more 3-phase track accessories on page 605



SQUBE on base

CEILING SURFACE



1.0 LED

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.43kg IP20 36°

90°

1.0 PAR16

PAR16 max.12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.43kg IP20 36°

90°

CODE
144264W
144264B

CODE
144220W
144220B

Light Colour Selection

LUMEN CRI	CODE
2700K 350 >80	2
3000K 380 >80	4
1800-3000K 350 >80	9

OPTIONAL

dimmer

CODE
90019017
90019018

more specs on page 591

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim


CODE
901228W2
901228W4
901229S9

more lamps and specs on page 593



SQUBE on base

CEILING SURFACE



2.0 LED

LED 12W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.44kg IP20 0.3-10 24°

90°

CODE

144464W
144464B

Light Colour Selection

	LUMEN	CRI	CODE
2700K	780	>80	2
3000K	810	>80	4
1800-3000K	850	>80	9

OPTIONAL

dimmer

CODE

for switch 90019017



for din rail 90019018

more specs on page 591



SQUBE on base

CEILING SURFACE



#2 PAR16

2xPAR16 max.12W | GU10
100-240VAC
aluminium powder coated

0.43kg IP20

90° 355°

#3 PAR16

3xPAR16 max.12W | GU10
100-240VAC
aluminium powder coated

0.43kg IP20

90° 355°

	CODE
	144520W0
	144520B0

	CODE
	144620W0
	144620B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593



WINE AND TAPAS BAR BOBO & CO DESTELBERGEN | BELGIUM

SQUBE on track

**CEILING SURFACE
1-PHASE TRACK**





77
100
107
ø55



77
100
107
ø55

1.0 LED

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
incl. 1-phase track adapter

0.36kg | IP20 | 0.3m | 36°
90° | 355°

CODE	
	144164W
	144164B

Light Colour Selection

	LUMEN CRI	CODE
2700K	350 >80	2
3000K	380 >80	4
1800-3000K	350 >80	9

more 1-phase track accessories on page 603

OPTIONAL

dimmer

	CODE
for switch	90019017
for din rail	90019018

more specs on page 591

1.0 PAR16

PAR16 max.12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
incl. 1-phase track adapter

0.32kg | IP20 | 0.9m | 36°
90° | 355°

CODE	
	144120W0
	144120B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593


more 1-phase track accessories on page 603

back



SQUBE on track

**CEILING SURFACE
3-PHASE TRACK**



1.0 PAR16

PAR16 max.12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
incl. 3-phase track adapter

0.32kg | IP20 | 0.9m | 36°
90° | 355°


	CODE
White	144720W0
Black	144720B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593
more 3-phase track accessories on page 605



2.0 LED

LED 12W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
incl. 3-phase track adapter

0.40kg | IP20 | 0.3m | 24°
90° | 355°

	CODE
White	144364W_
Black	144364B_

Light Colour Selection


	LUMEN CRI	CODE
2700K	780 >80	2
3000K	810 >80	4
1800-3000K	850 >80	9

OPTIONAL

dimmer

	CODE
for switch	90019017
for din rail	90019018

more specs on page 591
more 3-phase track accessories on page 605



3.0 LED

LED 20W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
incl. 3-phase track adapter

0.75kg | IP20 | 0.3m | 31°
90° | 355°

	CODE
White	144564W_
Black	144564B_

Light Colour Selection

	LUMEN CRI	CODE
2700K	1250 >90	3
3000K	1360 >90	5

OPTIONAL

dimmer


	CODE
for switch	90019017
for din rail	90019018


more specs on page 591
more 3-phase track accessories on page 605





BAR BERNARD | MARIE LECLUYSE INTERIEURARCHITECTUUR POPERINGE | BELGIUM

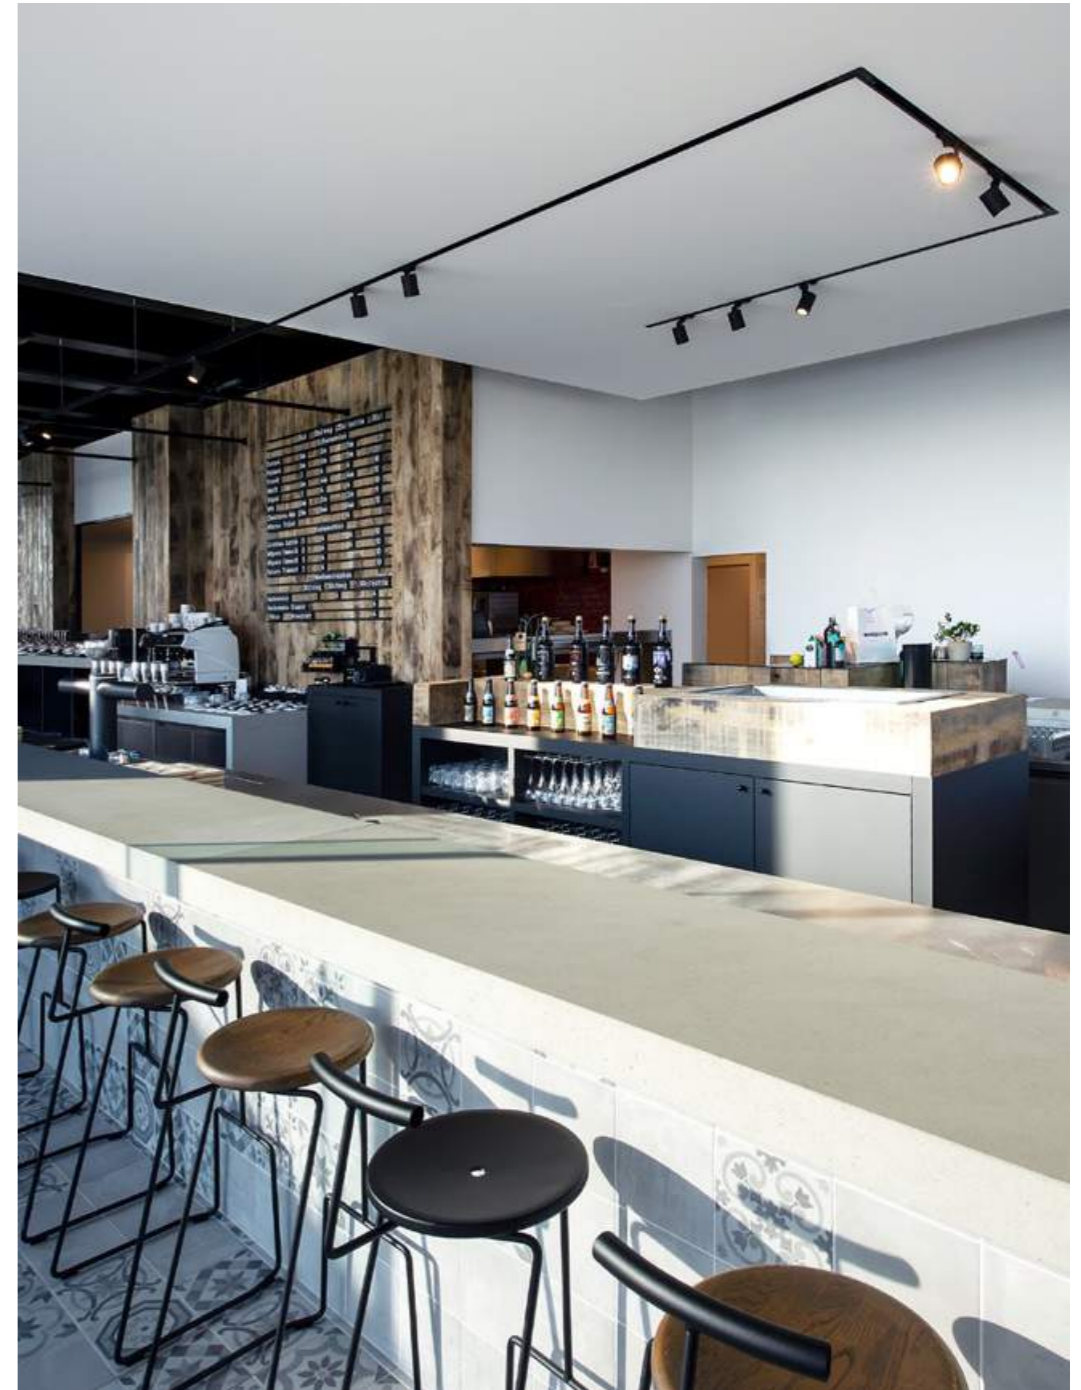

 back



As awarded by The Chicago Athenaeum:
Museum of Architecture and Design




ELLO SYSTEM UPDATE

CEILING SURFACE



p. 379



1.0

LED 18W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated
opal PMMA cover

1.70kg | IP20 | 0.3m | P

3000K | >90 CRI | 981lm

	CODE
	500184W5
	500184B5

DALI | 3000K | >90 CRI | 981lm

	CODE
	500185W5
	500185B5

ALWAYS USE

connector point

	CODE
	900190W1
	900190B1


OPTIONAL

suspension
cable 2.0m

	CODE
	90015102

power feeder for suspension

	CODE
	90018001
	90018000

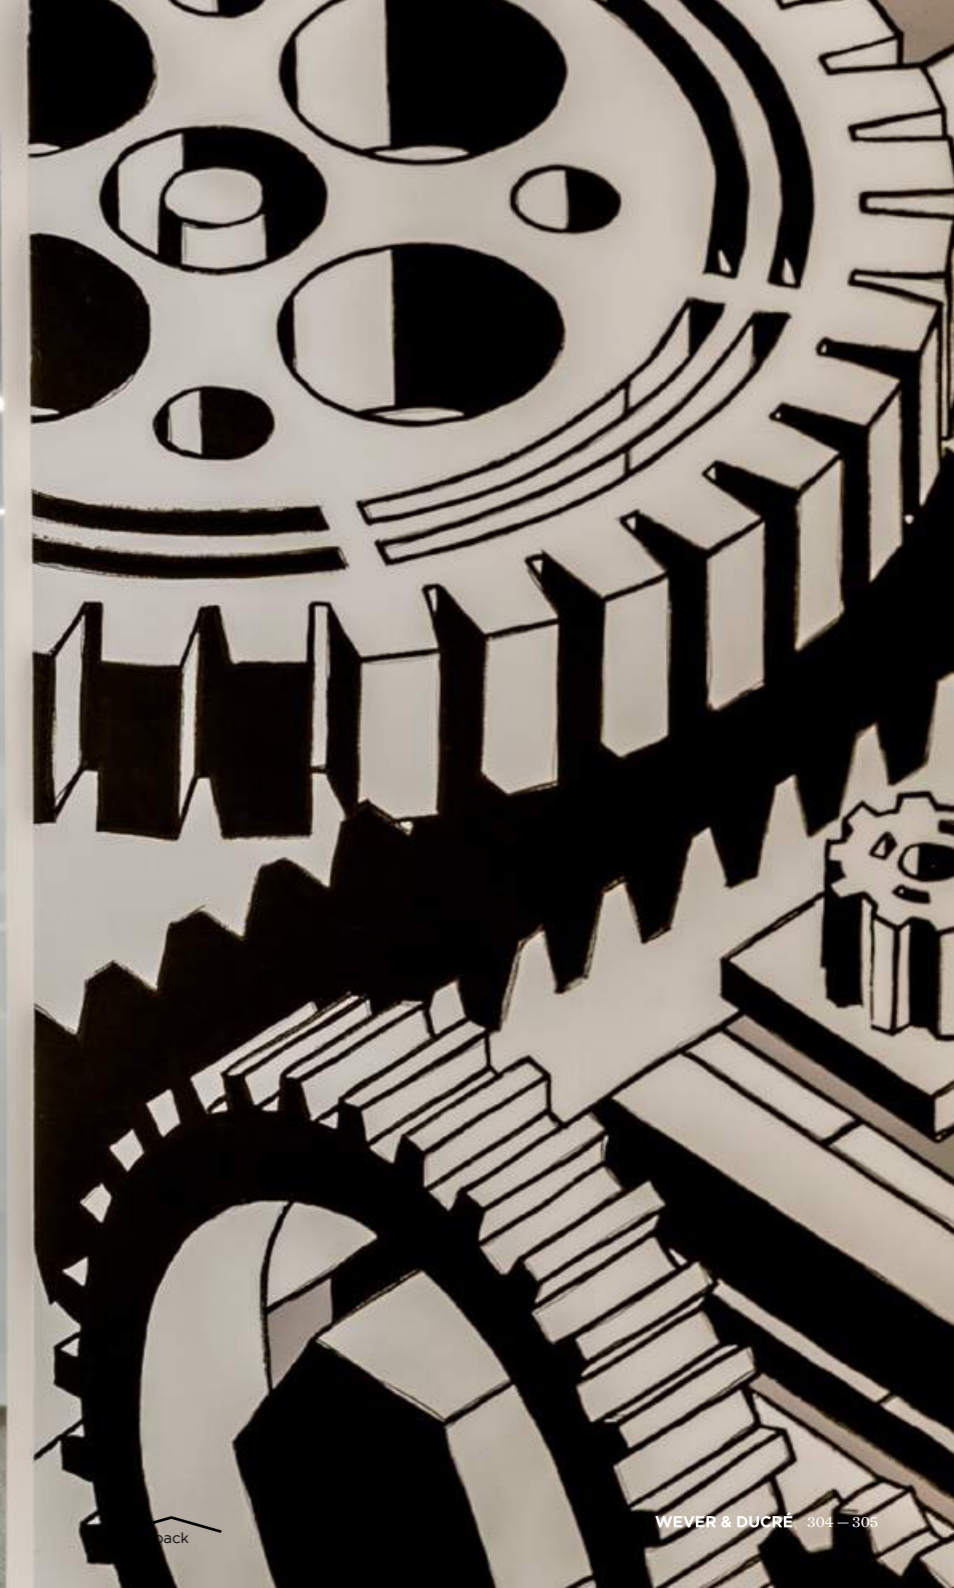

CEILING SUSPENDED

p. 309 – 379



Explore our Designer
Families from p. 23 -147



WETRO
p. 309



DINOR 1.0
p. 313



DINOR 2.0
p. 313



DINOR 3.0
p. 313



SHIEK 2.0
p. 315



SHIEK 3.0
p. 317



BISHOP
p. 325



BEBOW
p. 333



VENN
p. 337



GIGANT
p. 339



CORK
p. 357



BOX MULTI
p. 363



DOCUS MULTI
p. 365



HEXO MULTI
p. 367



CYCLONE
p. 343



BOX
p. 347



DOCUS
p. 349



HEXO
p. 351



RAY
p. 355



RAY MULTI
p. 369



CORK MULTI
p. 371



CONE
p. 373



SELO
p. 375




ELLO
p. 379

back



WETRO UPDATE
 CEILING SUSPENDED



1.0

LED 11W | 220-240VAC | 50-60Hz
 AC PCB 3-step low flicker
 incl. PS | phase-cut dim
 artisanal hand-blown glass

0.56 kg | IP20 | $\approx 0,3 \cdot D$

1800-2850K | >90 CRI | 340lm


	CODE
	236189P9
	236189B9

ALWAYS USE

single ceiling base

	CODE
	90052022
	90052021

multi- and other suspension options
 on page 608



2.0

LED 11W | 220-240VAC | 50-60Hz
 AC PCB 3-step low flicker
 incl. PS | phase-cut dim
 artisanal hand-blown glass

0.97 kg | IP20 | $\approx 0,3 \cdot D$

1800-2850K | >90 CRI | 340lm


	CODE
	236289P9
	236289B9

ALWAYS USE

single ceiling base

	CODE
	90052022
	90052021

multi- and other suspension options
 on page 608



3.0

LED 11W | 220-240VAC | 50-60Hz
 AC PCB 3-step low flicker
 incl. PS | phase-cut dim
 artisanal hand-blown glass

1.69 kg | IP20 | $\approx 0,3 \cdot D$

1800-2850K | >90 CRI | 340lm

	CODE
	236389P9
	236389B9

ALWAYS USE

single ceiling base


	CODE
	90052022
	90052021

multi- and other suspension options
 on page 608




As awarded by The Chicago Athenaeum:
 Museum of Architecture and Design

DESIGNED BY 3HDRAFT







OFFICE | RAIFFEISENBANK SALZKAMMERGUT | AUSTRIA

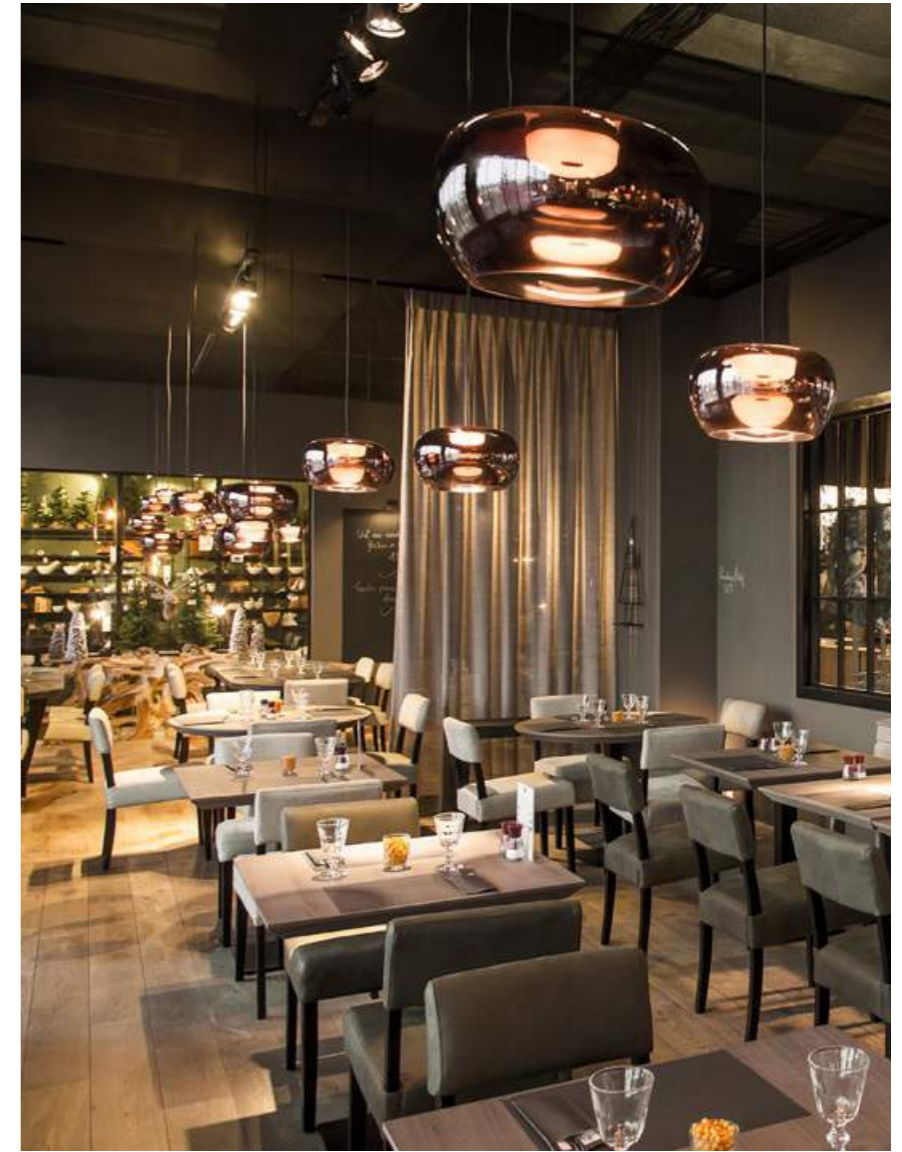

SHOP SLOTS SPIERE-HELKIJN | BELGIUM

 back



1.0

LED 11W | 220-240VAC | 50-60Hz
AC PCB 3-step low flicker
incl. PS | phase-cut dim
aluminium wet painted

0.9 kg IP20 $\mathbb{N}+0,3+D$

1800-2850K | >90 CRI | 510lm


CODE	
	255189RW9
	255189GW9
	255189OK9
	255189OB9

ALWAYS USE

single ceiling base

CODE	
	90052022
	90052021

white cable on request
multi- and other suspension options
on page 608



2.0

LED 11W | 220-240VAC | 50-60Hz
AC PCB 3-step low flicker
incl. PS | phase-cut dim
aluminium wet painted

1.3 kg IP20 $\mathbb{N}+0,3+D$

1800-2850K | >90 CRI | 510lm


CODE	
	255289RW9
	255289GW9
	255289OK9
	255289OB9

ALWAYS USE

single ceiling base

CODE	
	90052022
	90052021

white cable on request
multi- and other suspension options
on page 608



3.0

LED 11W | 220-240VAC | 50-60Hz
AC PCB 3-step low flicker
incl. PS | phase-cut dim
aluminium wet painted

2.3 kg IP20 $\mathbb{N}+0,3+D$

1800-2850K | >90 CRI | 510lm

CODE	
	255389RW9
	255389GW9
	255389OK9
	255389OB9


ALWAYS USE


single ceiling base

CODE	
	90052022
	90052021

white cable on request
multi- and other suspension options
on page 608

available from autumn 2019





1.0 LED

LED 11W | 220-240VAC | 50-60Hz
 AC PCB 3-step low flicker
 incl. PS | phase-cut dim
 aluminium powder coated
 lacquered | incl. 1x strain relief
 and hook

0.36 kg IP20 \approx 0,3+

1800-2850K | >90 CRI | 510lm


	CODE
	237189W9
	237189J9
	237189P9
	237189K9
	237189Z9

ALWAYS USE

single ceiling base

	CODE
	90052022
	90052021

white cable on request
 multi- and other suspension options
 on page 608



2.0 LED

LED 11W | 220-240VAC | 50-60Hz
 AC PCB 3-step low flicker
 incl. PS | phase-cut dim
 aluminium powder coated
 lacquered | incl. 1x strain relief
 and hook

0.47 kg IP20 \approx 0,3+

1800-2850K | >90 CRI | 510lm


	CODE
	237289W9
	237289J9
	237289P9
	237289K9
	237289Z9

ALWAYS USE

single ceiling base

	CODE
	90052022
	90052021

white cable on request
 multi- and other suspension options
 on page 608






PRIVATE RESIDENCE | ARCHITECT ROACH YOUNG STUDIO UNITED KINGDOM



SHIEK UPDATE
CEILING SUSPENDED



3.0 LED

LED 11W | 220-240VAC | 50-60Hz
 AC PCB 3-step low flicker
 incl. PS | phase-cut dim
 aluminium powder coated
 lacquered | incl. 1x strain relief
 and hook

0.60 kg IP20

1800-2850K | >90 CRI | 510lm

	CODE
	237389W9
	237389J9
	237389P9
	237389K9
	237389Z9

ALWAYS USE

single ceiling base

	CODE
	90052022
	90052021

white cable on request
 multi- and other suspension options
 on page 608




reddot award 2017
 winner



As awarded by The Chicago Athenaeum:
 Museum of Architecture and Design


DESIGNED BY 3HDRAFT





SHIEK UPDATE

CEILING SUSPENDED



4.0 LED

LED 11W | 220-240VAC | 50-60Hz
AC PCB 3-step low flicker
incl. PS | phase-cut dim | aluminium
powder coated | lacquered
incl. 1x strain relief and hook

0.70 kg IP20 ±0.3°D

1800-2850K | >90 CRI | 510lm

	CODE
	237489W9
	237489J9
	237489P9
	237489K9
	237489Z9

ALWAYS USE

single ceiling base

	CODE
	90052022
	90052021

multi- and other suspension options
on page 608


cable ring for 3 lamps

	CODE
	90059123
	90059121

cable ring for 4 lamps

	CODE
	90059124
	90059122

cable ring for multi suspension only
white cable on request



5.0 LED

LED 11W | 220-240VAC | 50-60Hz
AC PCB 3-step low flicker
incl. PS | phase-cut dim | aluminium
powder coated | lacquered
incl. 1x strain relief and hook

0.80 kg IP20 ±0.3°D

1800-2850K | >90 CRI | 510lm

	CODE
	237589W9
	237589J9
	237589P9
	237589K9
	237589Z9

ALWAYS USE

single ceiling base

	CODE
	90052022
	90052021

multi- and other suspension options
on page 608

cable ring for 3 lamps

	CODE
	90059123
	90059121

cable ring for 4 lamps

	CODE
	90059124
	90059122


cable ring for multi suspension only
white cable on request





SHIEK

CEILING SUSPENDED




3.0

E27 max.20W | E27 | QA60
100-240VAC | 50-60Hz
aluminium powder coated
lacquered | incl. 1x strain relief
and hook

0.6kg IP20

CODE
2343E8W0
2343E8J0
2343E8P0
2343E8K0
2343E8Z0




4.0

E27 max.20W | E27 | QA60
100-240VAC | 50-60Hz
aluminium powder coated
lacquered | incl. 1x strain relief
and hook

0.7kg IP20

CODE
2344E8W0
2344E8J0
2344E8P0
2344E8K0
2344E8Z0



5.0

E27 max.20W | E27 | QA60
100-240VAC | 50-60Hz
aluminium powder coated
lacquered | incl. 1x strain relief
and hook

0.8kg IP20

CODE
2345E8W0
2345E8J0
2345E8P0
2345E8K0
2345E8Z0

ALWAYS USE

single ceiling base

CODE
90052022
90052021

white cable on request
multi- and other suspension options
on page 608
more lamps and specs on page 594



reddot award 2017
winner



As awarded by The Chicago Athenaeum:
Museum of Architecture and Design

ALWAYS USE

single ceiling base

CODE
90052022
90052021

white cable on request
multi- and other suspension options
on page 608

cable ring for 3 lamps

CODE
90059123
90059121

cable ring for 4 lamps

CODE
90059124
90059122

cable ring for multi suspension only
more lamps and specs on page 594

ALWAYS USE

single ceiling base

CODE
90052022
90052021

white cable on request
multi- and other suspension options
on page 608

cable ring for 3 lamps

CODE
90059123
90059121

cable ring for 4 lamps


CODE
90059124
90059122

cable ring for multi suspension only
more lamps and specs on page 594



SHOP | ZICCAT CIOCCOLATERIA | ENRICO GIURBINO & FABIO VIVIANI TORINO | ITALY




 back



BISHOP

CEILING SUSPENDED



4.0

E27 LED max.25W | E27
220-240VAC | 50-60Hz
composite | aluminium lacquered

1.08kg IP20

shade only

	CODE
	218100SY
	218100GR
	218100GG

ALWAYS USE

cable suspension set | 2.0m cable

	CODE
	90015120
	90015138
	90015134
	90015119

6.0m suspension set on page 607

OPTIONAL

QA60 LED E27 6W dim

	CODE
2200K 400lm	9003E109
2700K 600lm	9003E138


G95 LED E27 6W dim

	CODE
2200K 400lm	9003E111

G95 LED E27 12W opal

	CODE
2700K 1050lm	9003E137

more lamps and specs on page 595



6.0

E27 LED max.25W | E27
220-240VAC | 50-60Hz
composite | aluminium lacquered

2.62kg IP20

shade only

	CODE
	218200SY
	218200GR
	218200GG

ALWAYS USE

cable suspension set | 2.0m cable

	CODE
	90015120
	90015138
	90015134
	90015119

6.0m suspension set on page 607

OPTIONAL

QA60 LED E27 6W dim

	CODE
2200K 400lm	9003E109
2700K 600lm	9003E138


G95 LED E27 6W dim

	CODE
2200K 400lm	9003E111

G95 LED E27 12W opal

	CODE
2700K 1050lm	9003E137

more lamps and specs on page 595



8.0

E27 LED max.25W | E27
220-240VAC | 50-60Hz
composite | aluminium lacquered

5.70kg IP20

shade only

	CODE
	218300SY
	218300GR
	218300GG

ALWAYS USE

cable suspension set | 2.0m cable

	CODE
	90015123
	90015139
	90015135
	90015122

6.0m suspension set on page 607

OPTIONAL

QA60 LED E27 6W dim

	CODE
2200K 400lm	9003E109
2700K 600lm	9003E138


G95 LED E27 6W dim

	CODE
2200K 400lm	9003E111

G95 LED E27 12W opal

	CODE
2700K 1050lm	9003E137

more lamps and specs on page 595

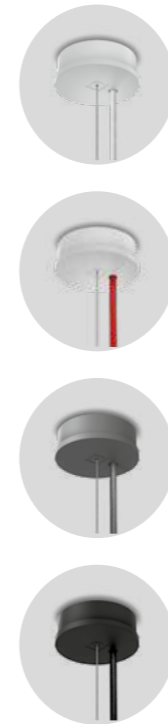






PRIVATE RESIDENCE AUSTRIA



BISHOP

CEILING SUSPENDED



4.0

E27 LED max.25W | E27
220-240VAC | 50-60Hz
composite | aluminium lacquered

1.08kg IP20

shade only

CODE
218100W0
218100D0
218100K0

ALWAYS USE

cable suspension set | 2.0m cable

CODE
90015120
90015138
90015134
90015119

6.0m suspension set on page 607

OPTIONAL

QA60 LED E27 6W dim

CODE
2200K 400lm 9003E109
2700K 600lm 9003E138


G95 LED E27 6W dim

CODE
2200K 400lm 9003E111

G95 LED E27 12W opal

CODE
2700K 1050lm 9003E137

more lamps and specs on page 595



6.0

E27 LED max.25W | E27
220-240VAC | 50-60Hz
composite | aluminium lacquered

2.62kg IP20

shade only

CODE
218200W0
218200D0
218200K0

ALWAYS USE

cable suspension set | 2.0m cable

CODE
90015120
90015138
90015134
90015119

6.0m suspension set on page 607

OPTIONAL

QA60 LED E27 6W dim

CODE
2200K 400lm 9003E109
2700K 600lm 9003E138


G95 LED E27 6W dim

CODE
2200K 400lm 9003E111

G95 LED E27 12W opal

CODE
2700K 1050lm 9003E137

more lamps and specs on page 595



8.0

E27 LED max.25W | E27
220-240VAC | 50-60Hz
composite | aluminium lacquered

5.70kg IP20

shade only

CODE
218300W0
218300D0
218300K0

ALWAYS USE

cable suspension set | 2.0m cable

CODE
90015123
90015139
90015135
90015122

6.0m suspension set on page 607

OPTIONAL

QA60 LED E27 6W dim

CODE
2200K 400lm 9003E109
2700K 600lm 9003E138

G95 LED E27 6W dim

CODE
2200K 400lm 9003E111

G95 LED E27 12W opal

CODE
2700K 1050lm 9003E137


more lamps and specs on page 595



reddot award 2015
honourable mention



As awarded by The Chicago Athenaeum:
Museum of Architecture and Design



back




BEBOW UPDATE

CEILING SUSPENDED



p. 235




1.0

LED 35W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
opal cover | two circuits
aluminium powder coated
opal PMMA cover

6.30kg IP20 ± 0.3

3000K | >90 CRI | 1820lm

	CODE
	132384W5
	132384B5




2.0


LED 55W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
opal cover + 3x spot | two circuits
aluminium powder coated
opal PMMA cover

6.70kg IP20 ± 0.3

3000K | >90 CRI | 2650lm

	CODE
	132364W5
	132364B5



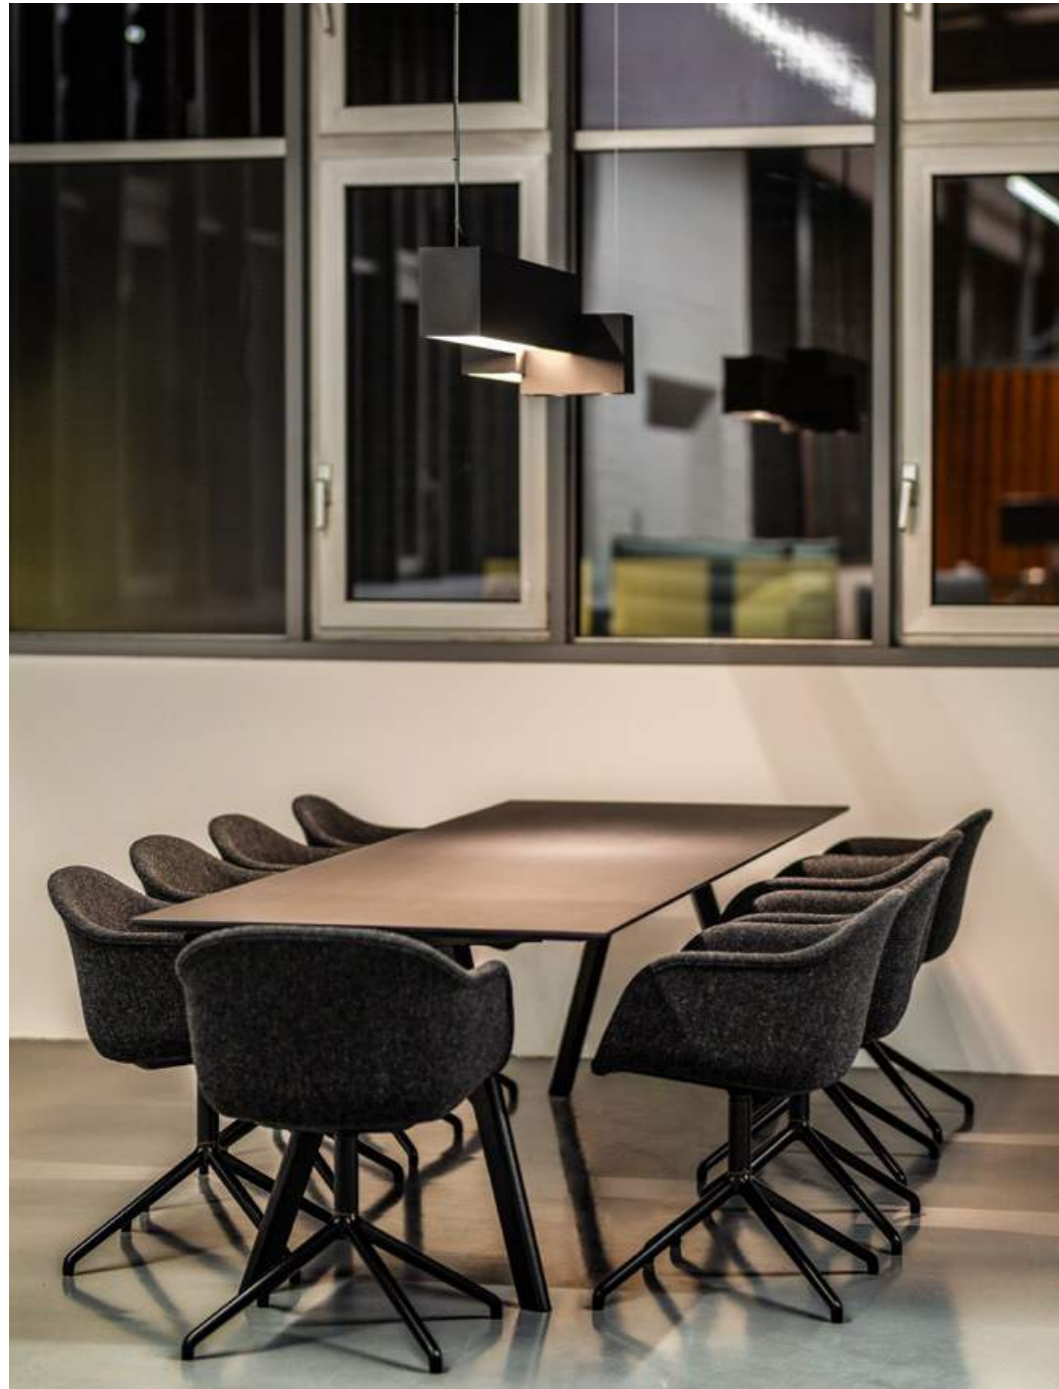


BEBOW UPDATE

CEILING SUSPENDED



p. 237

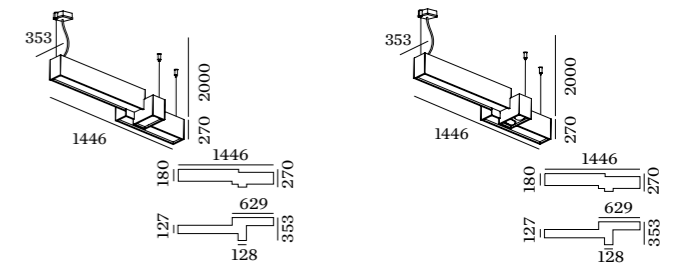

3.0

LED 35W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
opal cover | two circuits
aluminium powder coated
opal PMMA cover

8.00kg IP20 $\pm 0,3$

3000K | >90 CRI | 1910lm

	CODE
	132484W5
	132484B5

4.0

LED 48W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
opal cover + 2x spot | two circuits
aluminium powder coated
opal PMMA cover

8.30kg IP20 $\pm 0,3$



3000K | >90 CRI | 2350lm

	CODE
	132464W5
	132464B5



VENN UPDATE

CEILING SUSPENDED

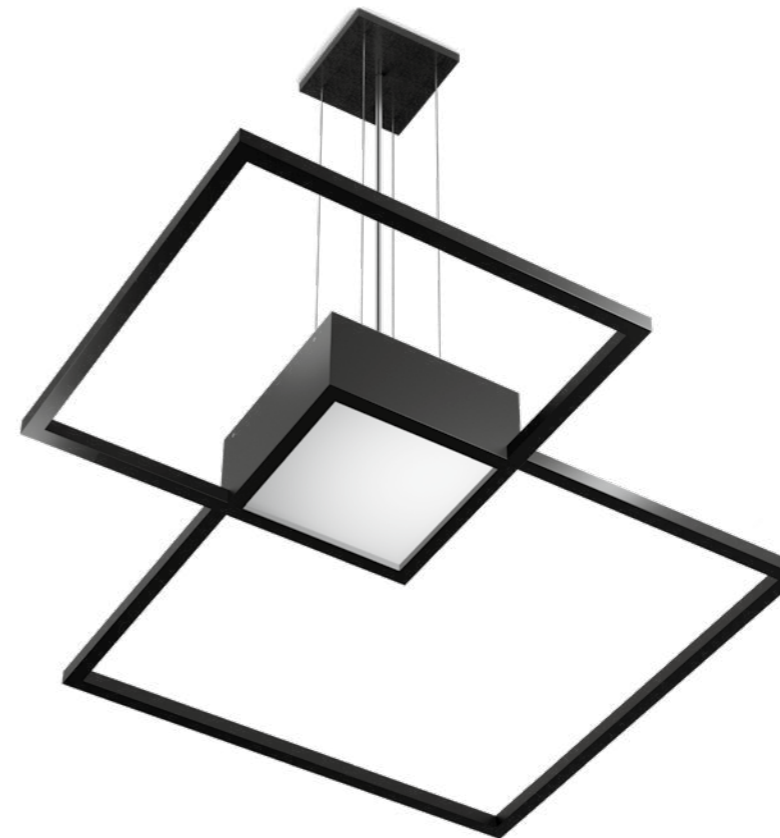

3.0

LED 47W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium powder coated
opal PMMA cover | direct/indirect

2.90kg IP20 0.3-1 P

	CODE
	149384W
	149384Q
	149384B

DALI

	CODE
	149385W
	149385Q
	149385B



Light Colour Selection

	LUMEN CRI	CODE
2700K	370/2100 >80	2
3000K	400/2250 >80	4



GIGANT

CEILING SUSPENDED



10.0

LED 42W | 220-240VAC | 50-60Hz
PCB 3-step | DALI switch dim
opal LLDPE body | steel

8.80kg IP20 $\pm 0.3^\circ$

16.0

LED 83W | 220-240VAC | 50-60Hz
PCB 3-step | DALI switch dim
opal LLDPE body | steel

15.30kg IP20 $\pm 0.3^\circ$

CODE
213185W_

Light Colour Selection

LUMEN CRI	CODE
3000K 5000 >85	4
4000K 5300 >85	6

OPTIONAL

CODE
suspension set 4.0m 90015114

the used material applies to UL 94 HB standard and glow wire test 630° longer suspension on request

CODE
213285W_


Light Colour Selection

LUMEN CRI	CODE
3000K 9900 >85	4
4000K 10400 >85	6

OPTIONAL


CODE
suspension set 4.0m 90015114

the used material applies to UL 94 HB standard and glow wire test 630° longer suspension on request





OFFICE ZUIDERPOORT GENT | BELGIUM

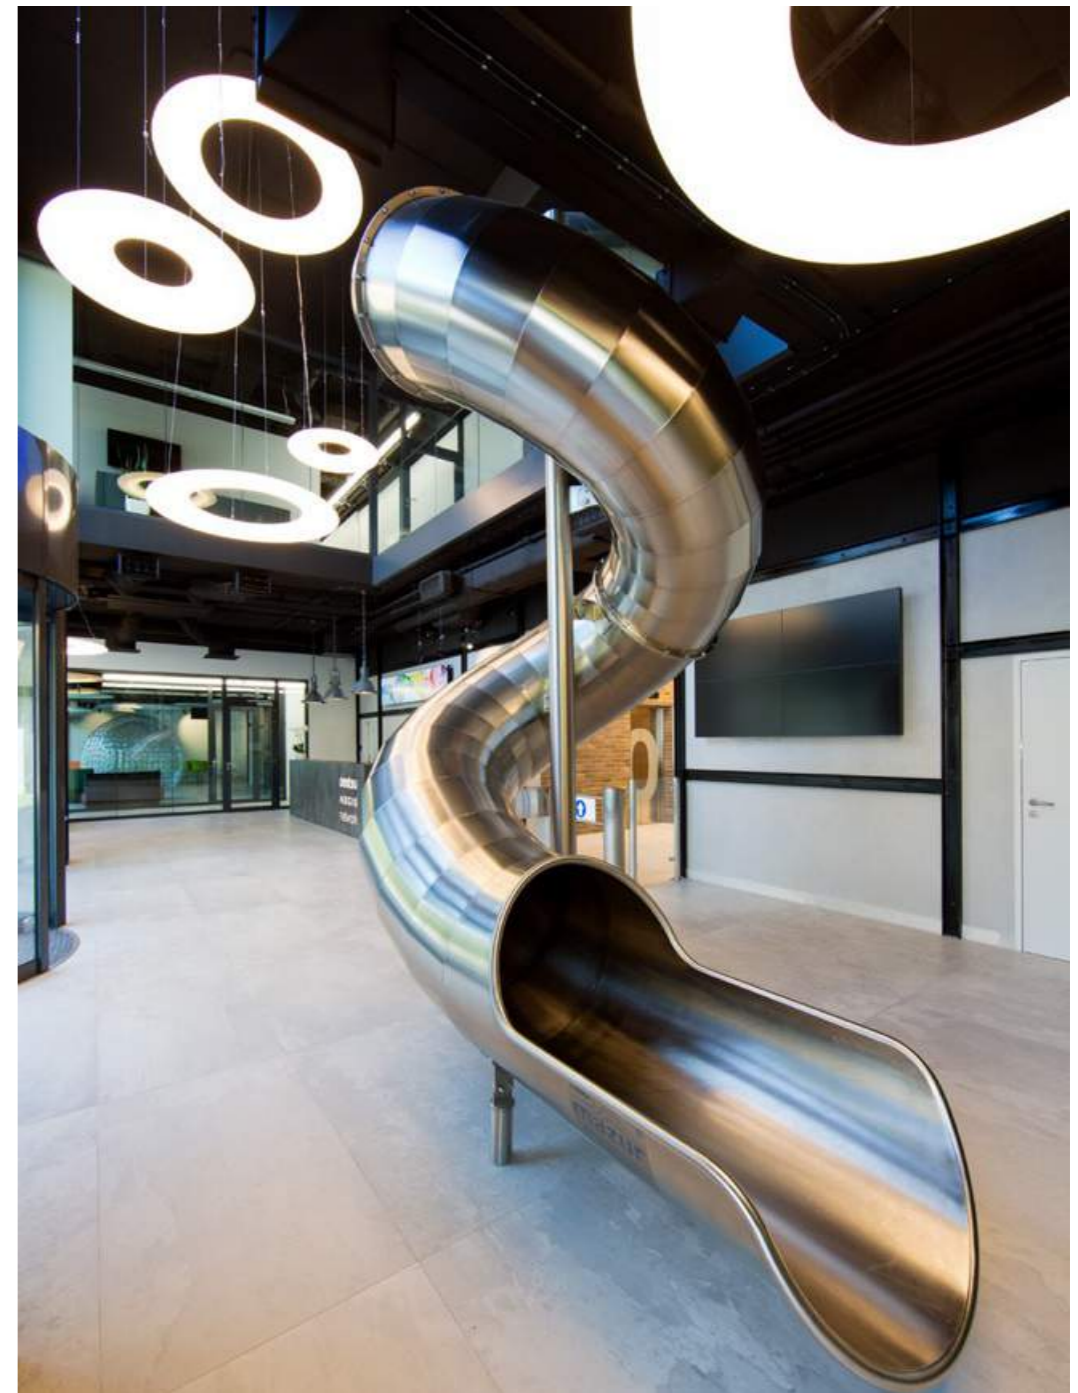



OFFICE | DENTSU AEGIS NETWORK | TRZOP ARCHITEKCI | PLUSLIGHTING WARSAW | POLAND



OFFICE | MICROSOFT | CONCEPT & DESIGN: PROCOS GROUP BRUSSELS | BELGIUM

CYCLONE

CEILING SUSPENDED

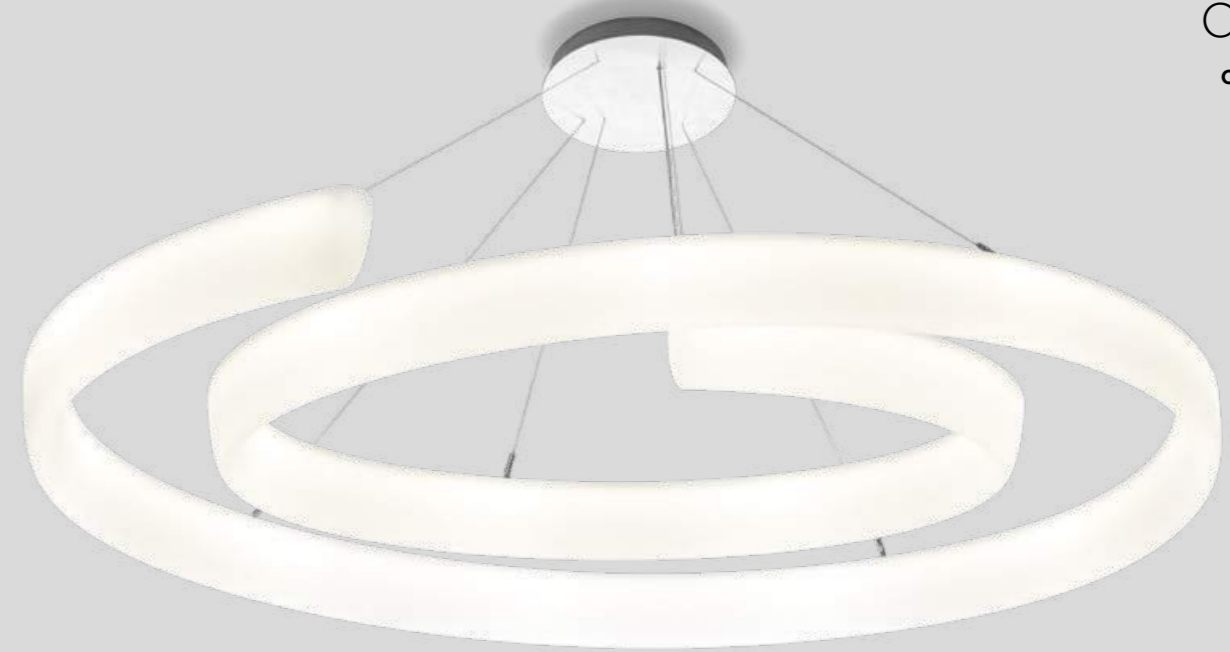

17.0

LED 70W | 220-240VAC
50-60Hz | PCB 3-step | DALI dim
aluminium powder coated
opal LLDPE body

8.80kg IP20 $\pm 0.3^\circ$


3000K | >80 CRI | 7000lm

CODE

219185W4

the used material applies to UL 94 HB
standard and glow wire test 630°





2.0 | 3.0 LED

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.69 | 0.86kg | IP20 | $\pm 0,3^\circ$ | $\Delta 36^\circ$

2.0

200mm

	CODE
	207164W
	207164L
	207164P
	207164B

3.0

300mm

	CODE
	207264W
	207264L
	207264P
	207264B

Light Colour Selection


	LUMEN CRI	CODE
2700K	420 >90	3
3000K	440 >90	5
1800-2850K	360 >95	9



p. 249 p. 429 p. 465 p. 515

BOX

CEILING SUSPENDED



2.0 | 3.0 PAR16

PAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.62 | 0.79kg | IP20 | $\pm 0,9^\circ$

2.0

200mm

	CODE
	207120W0
	207120L0
	207120P0
	207120B0

3.0

300mm


	CODE
	207220W0
	207220L0
	207220P0
	207220B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593



2.0 | 3.0 LED

LED 6W | 220-240VAC | 50-60Hz
 COB 3-step | incl. PS | phase-cut dim
 aluminium powder coated
 brushed

0.69 | 0.85kg IP20 $\pm 0.3^\circ$ $\triangle 36^\circ$

2.0

200mm	CODE
	207564W
	207564L
	207564G
	207564P
	207564B

3.0

300mm	CODE
	207664W
	207664L
	207664G
	207664P
	207664B

Light Colour Selection


	LUMEN	CRI	CODE
2700K	420	>90	3
3000K	440	>90	5
1800-2850K	360	>95	9



p. 255

DOCUS

CEILING SUSPENDED



2.0 | 3.0 PAR16

PAR16 max.35W | GU10
 100-240VAC | 50-60Hz
 aluminium powder coated
 brushed

0.62 | 0.75kg IP20 $\pm 0.9^\circ$

2.0

200mm	CODE
	207520W0
	207520L0
	207520G0
	207520P0
	207520B0

3.0

300mm	CODE
	207620W0
	207620L0
	207620G0
	207620P0
	207620B0

OPTIONAL

PAR16 LED GU10 7W
 phase-cut dim


	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593



HEXO

CEILING SUSPENDED



2.0 | 3.0 LED

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.66 | 0.82kg | IP20 | $\pm 0.3^\circ$ | $\Delta 36^\circ$

2.0

200mm

	CODE
	207364G
	207364Q
	207364P
	207364B


3.0

300mm

	CODE
	207464G
	207464Q
	207464P
	207464B

Light Colour Selection

	LUMEN	CRI	CODE
2700K	420	>90	3
3000K	440	>90	5
1800-2850K	360	>95	9



2.0 | 3.0 PAR16

PAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.58 | 0.74kg | IP20 | $\pm 0.9^\circ$

2.0

200mm

	CODE
	207320G0
	207320Q0
	207320P0
	207320B0

3.0

300mm

	CODE
	207420G0
	207420Q0
	207420P0
	207420B0

OPTIONAL


PAR16 LED GU10 7W
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593



p. 259




back





RAY

CEILING SUSPENDED



2.0 | 3.0 LED

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.62 | 0.76kg IP20 36°

2.0

200mm

	CODE
	207764W
	207764L
	207764G
	207764P
	207764B

3.0

300mm

	CODE
	207864W
	207864L
	207864G
	207864P
	207864B

Light Colour Selection

	LUMEN	CRI	CODE
2700K	420	>90	3
3000K	440	>90	5
1800-2850K	360	>95	9




p. 265

p. 439

p. 469

p. 521



2.0 | 3.0 PAR16

PAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.54 | 0.68kg IP20 36°

2.0

200mm

	CODE
	207720W0
	207720L0
	207720G0
	207720P0
	207720B0

3.0

300mm

	CODE
	207820W0
	207820L0
	207820G0
	207820P0
	207820B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim


	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593



CORK

CEILING SUSPENDED



1.0

LED 1.5W | 120-240VAC | 50-60Hz
 PCB 3-step | incl. power supply
 aluminium powder coated
 fits bottles inner ø16,5 - 19,5 mm
 and max. 1kg

0.24kg | IP20 | 0.3m | 36°

	CODE
	210163W_
	210163B_

Light Colour Selection

	LUMEN CRI	CODE
2200K	120 >80	1
2700K	180 >80	2

OPTIONAL

	CODE
bottle 1	
75/174 glass	90019013
bottle 2	
87/323 glass	90019014






MULTI SUSPENSION

LET'S HANG OUT TOGETHER

RAY transforms every ceiling into a dance floor where it's at its best when swinging together with other Wever & Ducré luminaires. The trick: Up to eight luminaires can be suspended as a multi-baldachin in a round design and as many as five in a straight design. And all this from a single light outlet above which they can be individually arranged. As a straight line or in the shape of a spider's web, loosely suspended cables become a design element in their own right. Thus, not only the dining area, but also the room itself can be skilfully put into the spotlight. Which of our luminaires are best suited for the multi-baldachin team? In addition to WETRO and DOCUS, BOX, HEXO, SELO, and SHIEK also make for outstanding combination options. Try it out for yourself.

RAY verwandelt jede Decke in eine Tanzfläche, auf der sie am liebsten gemeinsam mit anderen Wever & Ducré-Leuchten swingt. Der Trick: Bis zu 8 Leuchten lassen sich als Multibaldachin in runder und bis zu 5 in gerader Form abhängen. Und das alles von einem einzigen Lichtauslass aus, über dem sie sich ganz individuell arrangieren lassen. Schnurgerade oder in Spinnennetzform, bei der die locker durchhängenden Kabel zu einem eigenen Design-Element werden. So wird nicht nur der Essbereich, sondern auch der Raum selbst gekonnt in Szene gesetzt. Welche unserer Leuchten ins Multibaldachin-Team passen? Neben WETRO und DOCUS sind auch BOX, HEXO, SELO oder SHIEK absolute Kombinationsgenies. Also gleich ausprobieren.



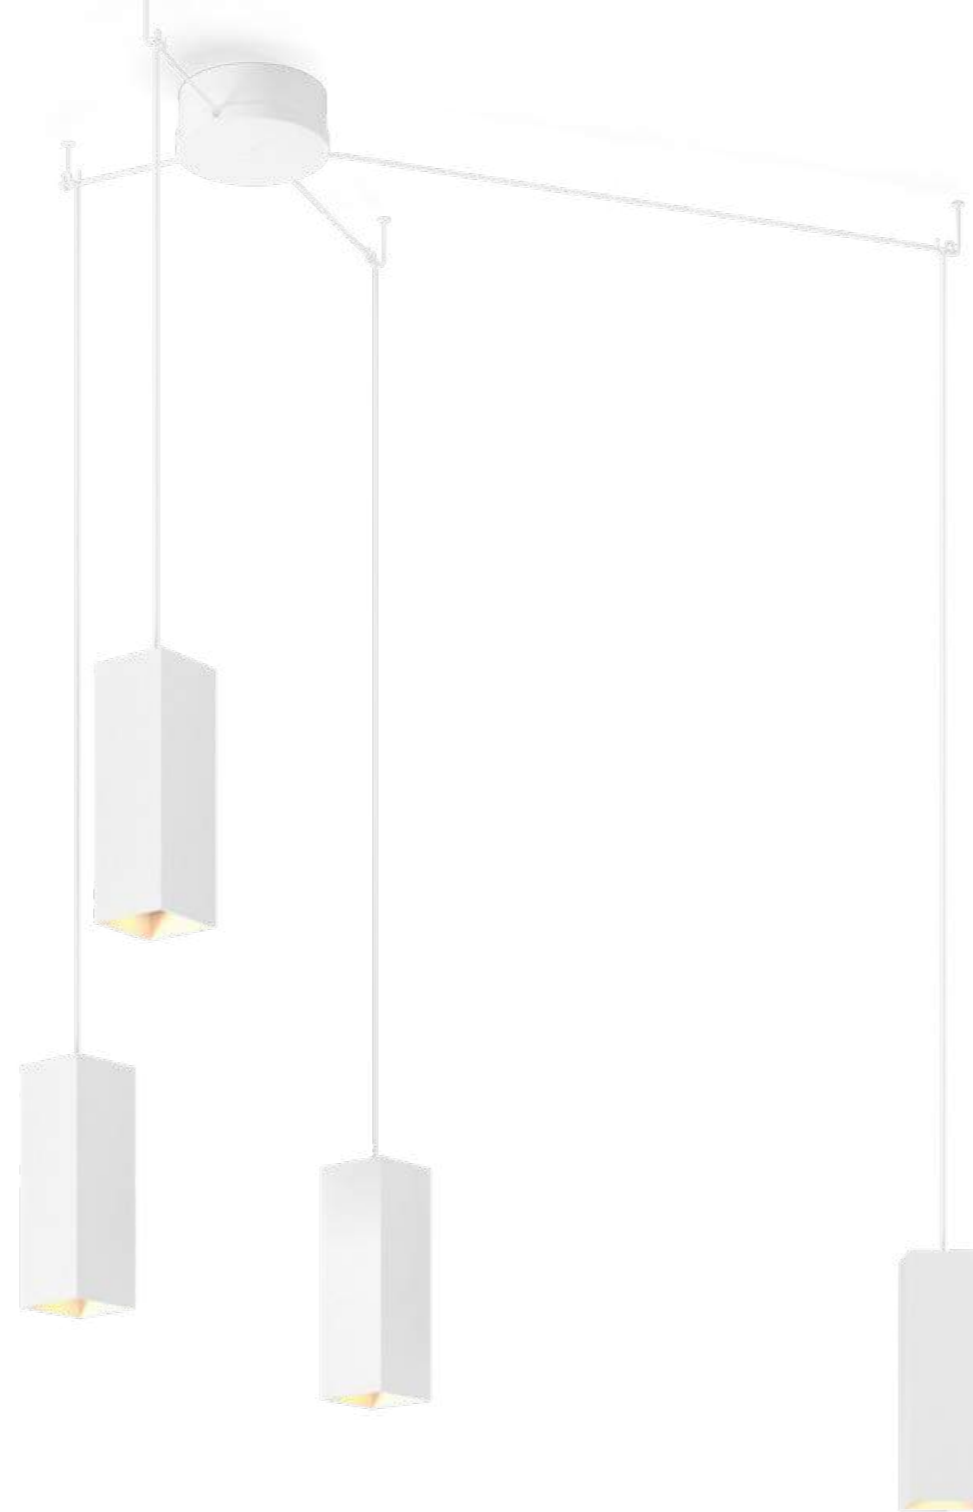

2.0 | 3.0 LED

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.69kg IP20 $\pm 0.3^\circ$ $\pm 36^\circ$

2.0

200mm

Color	CODE
White	227164W
Grey	227164L
Brown	227164P
Black	227164B

3.0

300mm

Color	CODE
White	227264W
Grey	227264L
Brown	227264P
Black	227264B

Light Colour Selection

	LUMEN	CRI	CODE
2700K	420	>90	3
3000K	440	>90	5
1800-2850K	360	>95	9

2.0 | 3.0 PAR16

PAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.62kg IP20 $\pm 0.3^\circ$

2.0

200mm

Color	CODE
White	227120W0
Grey	227120L0
Brown	227120P0
Black	227120B0

3.0

300mm

Color	CODE
White	227220W0
Grey	227220L0
Brown	227220P0
Black	227220B0

OPTIONAL

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593

BOX MULTI

CEILING SUSPENDED

ALWAYS USE

multiple suspension ceiling base
round for up to 8 lamps

	CODE
White	90052005
Black	90052006

extra set standard connectors for
5 to 8 lamps

	CODE
White	90052006
Black	90052007

multiple suspension ceiling base long
600mm | 2 lamps

	CODE
White	90052007
Black	90052008

900mm | 3 lamps

	CODE
White	90052009
Black	90052010

1200mm | 4 lamps

	CODE
White	90052011
Black	90052012




1500mm | 5 lamps

	CODE
White	90052013
Black	90052014

more options and information
on page 609

DOCUS MULTI

CEILING SUSPENDED

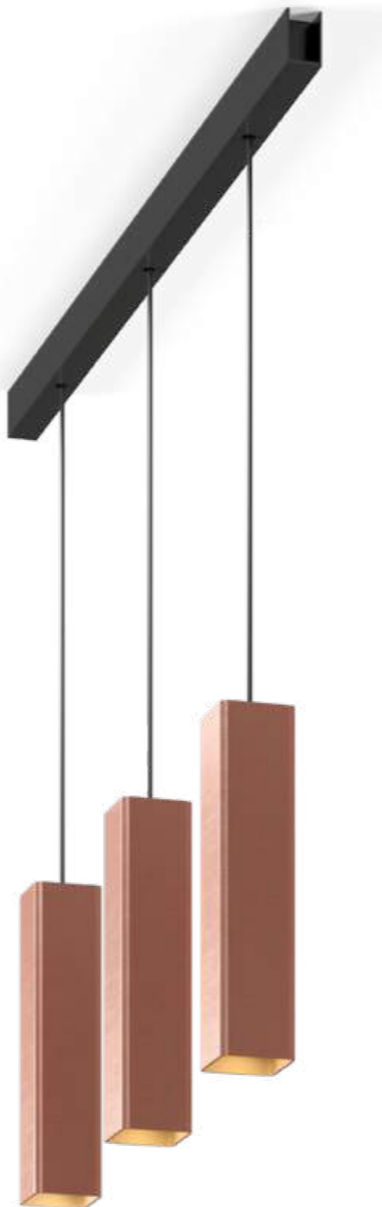

2.0 | 3.0 LED

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.69kg IP20 $\pm 0.3^\circ$ $\pm 36^\circ$

2.0

200mm	CODE
	227564W
	227564L
	227564G
	227564P
	227564B

3.0

300mm	CODE
	227664W
	227664L
	227664G
	227664P
	227664B

Light Colour Selection

	LUMEN	CRI	CODE
2700K	420	>90	3
3000K	440	>90	5
1800-2850K	360	>95	9

2.0 | 3.0 PAR16

PAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.62kg IP20 $\pm 0.9^\circ$

2.0

200mm	CODE
	227520W0
	227520L0
	227520G0
	227520P0
	227520B0

3.0

300mm	CODE
	227620W0
	227620L0
	227620G0
	227620P0
	227620B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593

ALWAYS USE

multiple suspension ceiling base
round for up to 8 lamps

	CODE
	90052005
	90052006

extra set standard connectors for
5 to 8 lamps

	CODE
	90059118

multiple suspension ceiling base long
600mm | 2 lamps

	CODE
	90052007
	90052008

900mm | 3 lamps

	CODE
	90052009
	90052010


1200mm | 4 lamps

	CODE
	90052011
	90052012

1500mm | 5 lamps



	CODE
	90052013
	90052014

more options and information
on page 609

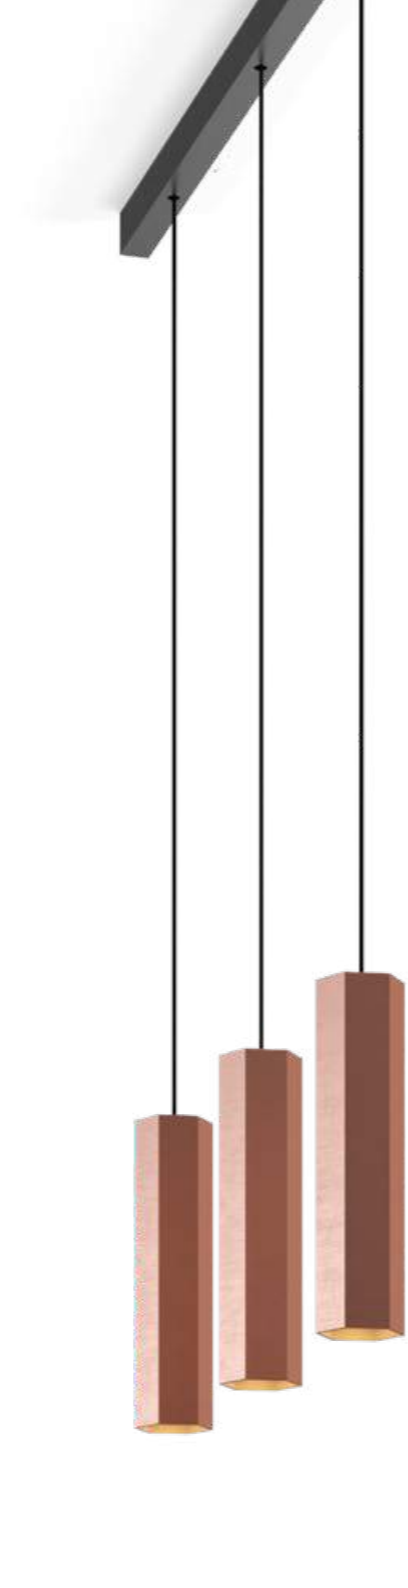

HEXO MULTI

CEILING SUSPENDED



2.0 | 3.0 LED

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.66kg IP20 $\pm 0.3^\circ$ $\Delta 36^\circ$

2.0

200mm

	CODE
	227364G
	227364Q
	227364P
	227364B

3.0

300mm

	CODE
	227464G
	227464Q
	227464P
	227464B

Light Colour Selection

	LUMEN	CRI	CODE
2700K	420	>90	3
3000K	440	>90	5
1800-2850K	360	>95	9

2.0 | 3.0 PAR16

PAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.58kg IP20 $\pm 0.9^\circ$

2.0

200mm

	CODE
	227320G0
	227320Q0
	227320P0
	227320B0

3.0

300mm

	CODE
	227420G0
	227420Q0
	227420P0
	227420B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593

ALWAYS USE

multiple suspension ceiling base
round for up to 8 lamps

	CODE
	90052005
	90052006

extra set standard connectors for
5 to 8 lamps

	CODE
	90059118

multiple suspension ceiling base long
600mm | 2 lamps

	CODE
	90052007
	90052008

900mm | 3 lamps

	CODE
	90052009
	90052010

1200mm | 4 lamps

	CODE
	90052011
	90052012



1500mm | 5 lamps

	CODE
	90052013
	90052014

more options and information
on page 609



TEA ROOM HUIS VAN DE GROOTJUFFROUW-KOFFIEQUEEN KORTRIJK | BELGIUM



2.0 | 3.0 LED

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.62kg IP20 0.3+D P A 36°

2.0

200mm	CODE
	227764W
	227764L
	227764G
	227764P
	227764B

3.0

300mm	CODE
	227864W
	227864L
	227864G
	227864P
	227864B

Light Colour Selection

	LUMEN	CRI	CODE
2700K	420	>90	3
3000K	440	>90	5
1800-2850K	360	>95	9

2.0 | 3.0 PAR16

PAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.54kg IP20 0.9+D

2.0

200mm	CODE
	227720W0
	227720L0
	227720G0
	227720P0
	227720B0

3.0

300mm	CODE
	227820W0
	227820L0
	227820G0
	227820P0
	227820B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593

ALWAYS USE

multiple suspension ceiling base
round for up to 8 lamps

	CODE
	90052005
	90052006

extra set standard connectors for
5 to 8 lamps

	CODE
	90059118

multiple suspension ceiling base long
600mm | 2 lamps

	CODE
	90052007
	90052008

900mm | 3 lamps

	CODE
	90052009
	90052010

1200mm | 4 lamps

	CODE
	90052011
	90052012

1500mm | 5 lamps


	CODE
	90052013
	90052014

more options and information
on page 609



CORK MULTI

CEILING SUSPENDED



1.0

LED 1,5W | 120-240VAC | 50-60Hz
PCB 3-step | excl. power supply
aluminium powder coated
fits bottles inner ø16,5 - 19,5 mm

0.24kg | IP20 | 36°

ALWAYS USE

suspension base round for
3 to 8 lamps | incl. power supply

CODE	
210263W	white
210263B	black

CODE	
90052015	white
90052016	black

Light Colour Selection

LUMEN CRI	CODE
2200K 120 >80	1
2700K 180 >80	2

suspension base long
600mm | 2 lamps | incl. power supply

CODE	
90052017	white
90052018	black

OPTIONAL

CODE	
bottle 1	
75/174 glass	90019013
bottle 2	
87/323 glass	90019014

900mm | 3 lamps | incl. power supply



CODE	
90052019	white
90052020	black

more options and information
on page 609



CONE

CEILING SUSPENDED

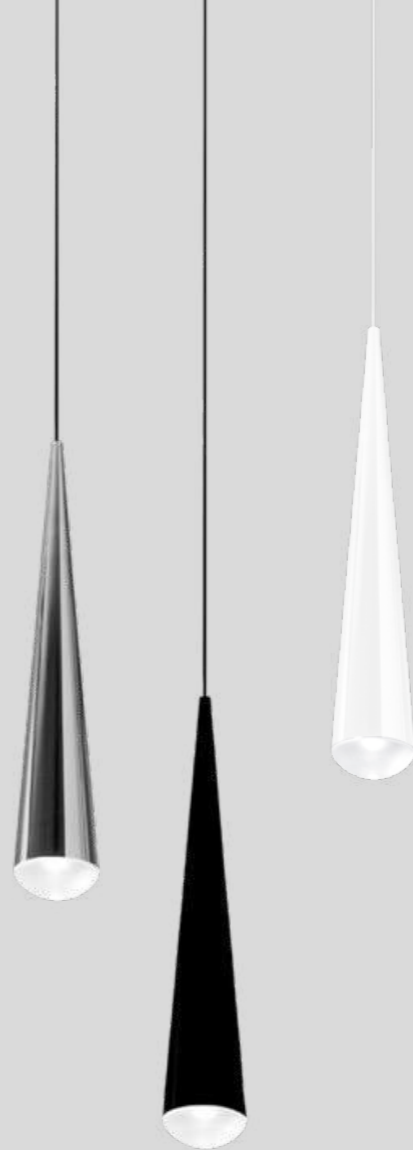

1.0

LED 8W | 220-240VAC | 50-60Hz
 COB 3-step | incl. PS | phase-cut dim
 aluminium powder coated
 chrome plated | glass

0.55kg | IP20 | 0.3m | 36°




2700K | >80 CRI | 480lm

CODE
200184W2
200184C2
200184B2



SELO

CEILING SUSPENDED



1.0

LED 11W | 220-240VAC | 50-60Hz
AC PCB 3-step low flicker
incl. PS | phase-cut dim
porcelain

0.80 kg IP20 0.3

1800-2850K | >90 CRI | 510lm

CODE
235189W9

ALWAYS USE

single ceiling base

CODE
90052022
90052021

white cable on request
multi- and other suspension options
on page 608

2.0

LED 11W | 220-240VAC | 50-60Hz
AC PCB 3-step low flicker
incl. PS | phase-cut dim
porcelain

0.96 kg IP20 0.3

1800-2850K | >90 CRI | 510lm

CODE
235289W9

ALWAYS USE

single ceiling base

CODE
90052022
90052021

white cable on request
multi- and other suspension options
on page 608

3.0

LED 11W | 220-240VAC | 50-60Hz
AC PCB 3-step low flicker
incl. PS | phase-cut dim
porcelain

0.80 kg IP20 0.3

1800-2850K | >90 CRI | 510lm

CODE
235389W9

ALWAYS USE

single ceiling base

CODE
90052022
90052021

white cable on request
multi- and other suspension options
on page 608





PRIVATE RESIDENCE | 3ARCHITECTEN BELGIUM




ELLO UPDATE

CEILING SUSPENDED



p. 303



13.0

LED 18W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated
opal PMMA cover


2.00kg IP20 0.3°

3000K | >90 CRI | 981lm

	CODE
	500284W5
	500284B5

DALI | 3000K | >90 CRI | 981lm

	CODE
	500285W5
	500285B5




reddot award 2015
winner



As awarded by The Chicago Athenaeum:
Museum of Architecture and Design

DESIGNED BY S&R CORNELISSEN



back

WEVER & DUCRÉ 378 - 379

WALL RECESSED

p. 383 – 395



SMILE IN
p. 383



LITO
p. 385



EYE
p. 387



THEMIS
p. 389



STRANGE
p. 391



STRIPE
p. 393




ORIS
p. 395





SMILE IN

WALL RECESSED



p. 479



1.0

LED 4/6W | 350/500mA | 9Vf
COB 3-step | excl. power supply
aluminium powder coated
brushed

0.39kg IP20 0,3-1

86 40 4-40

3000K | >80 CRI | 230/320lm

	CODE
	326151W4
	702151L4

ALWAYS USE

power supply

	CODE
350mA 6W	90213202
500mA 6W	90214201

more power supplies on page 588

OPTIONAL

	CODE
recessed housing	90012030

2.0

LED 4/6W | 350/500mA | 9Vf
COB 3-step | excl. power supply
aluminium powder coated
brushed

0.42kg IP20 0,3-1

86 40 4-40

3000K | >80 CRI | 230/320lm

	CODE
	326251W4
	703151L4

ALWAYS USE



power supply

	CODE
350mA 6W	90213202
500mA 6W	90214201

more power supplies on page 588

OPTIONAL

	CODE
recessed housing	90012030



1.0

LED 2/3W | 350/500mA | 6Vf
PCB 3-step | excl. power supply
aluminium powder coated
anodised

0.09kg IP20 0.3-1

70x70 35 12-18

3000K | >80 CRI | 160/210lm

	CODE
	145181W4
	145181A4
	145181B4

ALWAYS USE

power supply

	CODE
350mA 6W	90213202
500mA 6W	90214201

more power supplies on page 588

OPTIONAL

	CODE
recessed housing	90012027
plasterkit	90017119

2.0

LED 2/3W | 350/500mA | 6Vf
PCB 3-step | excl. power supply
aluminium powder coated
anodised

0.09kg IP20 0.3-1

70x70 35 12-18

3000K | >80 CRI | 160/210lm

	CODE
	145281W4
	145281A4
	145281B4

ALWAYS USE

power supply

	CODE
350mA 6W	90213202
500mA 6W	90214201

more power supplies on page 588


OPTIONAL

	CODE
recessed housing	90012027
plasterkit	90017119



EYE

WALL RECESSED



1.0

LED 1/2W | 350/700mA | 3Vf
PCB 3-step | excl. power supply
aluminium powder coated
brushed

0.06kg IP20 30°

46 30 2-18

3000K | >80 CRI | 90/150lm

	CODE
	302151W4
	302151L4

ALWAYS USE

power supply

	CODE
350mA 6W	90213202
700mA 6W	90215203

more power supplies on page 588

OPTIONAL

	CODE
recessed housing	90012025

2.0

LED 1/2W | 350/700mA | 3Vf
PCB 3-step | excl. power supply
aluminium powder coated
brushed

0.07kg IP20 30°

46 30 2-18

3000K | >80 CRI | 90/150lm

	CODE
	302251W4
	302251L4

ALWAYS USE

power supply

	CODE
350mA 6W	90213202
700mA 6W	90215203

more power supplies on page 588


OPTIONAL

	CODE
recessed housing	90012025



THEMIS

WALL RECESSED



1.7

LED 4/5W | 500/700mA | 6Vf
PCB 3-step | excl. power supply
aluminium powder coated
lacquered

0.24kg IP20

70x158 50 2-18

	CODE
	323271W
	323271X
	323271S
	323271K

Light Colour Selection

	LUMEN	CRI	CODE
2700K	230/320	>80	2
3000K	260/350	>80	4

ALWAYS USE


power supply

	CODE
500mA 6W	90214201
700mA 6W	90215203

more power supplies on page 588

OPTIONAL

	CODE
recessed housing	90012032
plasterkit	90017111



2.7

LED 4/5W | 500/700mA | 6Vf
PCB 3-step | excl. power supply
aluminium powder coated
lacquered

0.31kg IP20

70x258 50 2-18

	CODE
	323371W
	323371X
	323371S
	323371K

Light Colour Selection

	LUMEN	CRI	CODE
2700K	230/320	>80	2
3000K	260/350	>80	4

ALWAYS USE


power supply

	CODE
500mA 6W	90214201
700mA 6W	90215203

more power supplies on page 588

OPTIONAL

	CODE
recessed housing	90012033
plasterkit	90017112



5.0

LED 4/5W | 500/700mA | 6Vf
PCB 3-step | excl. power supply
aluminium powder coated
lacquered

0.45kg IP20

70x458 50 2-18

	CODE
	323671W
	323671X
	323671S

Light Colour Selection

	LUMEN	CRI	CODE
2700K	230/320	>80	2
3000K	260/350	>80	4

ALWAYS USE

power supply

	CODE
500mA 6W	90214201
700mA 6W	90215203

more power supplies on page 588


OPTIONAL

	CODE
recessed housing	90012036
plasterkit	90017115



STRANGE

WALL RECESSED



1.7

LED 4/5W | 500/700mA | 6Vf
PCB 3-step | excl. power supply
aluminium powder coated
lacquered

0.24kg IP20 $\approx 0.3^\circ$ 16

170x86 55 2-25

	CODE
	320271W
	320271S

Light Colour Selection


	LUMEN	CRI	CODE
2700K	230/320	>80	2
3000K	260/350	>80	4

ALWAYS USE

power supply

	CODE
500mA 6W	90214201
700mA 6W	90215203

more power supplies on page 588



2.7

LED 4/5W | 500/700mA | 6Vf
PCB 3-step | excl. power supply
aluminium powder coated
lacquered

0.31kg IP20 $\approx 0.3^\circ$ 16

270x86 55 2-25

	CODE
	320371W
	320371S

Light Colour Selection


	LUMEN	CRI	CODE
2700K	230/320	>80	2
3000K	260/350	>80	4

ALWAYS USE

power supply

	CODE
500mA 6W	90214201
700mA 6W	90215203

more power supplies on page 588



5.0

LED 4/5W | 500/700mA | 6Vf
PCB 3-step | excl. power supply
aluminium powder coated
lacquered

0.45kg IP20 $\approx 0.3^\circ$ 16

470x86 55 2-25

	CODE
	320671W
	320671S

Light Colour Selection

	LUMEN	CRI	CODE
2700K	230/320	>80	2
3000K	260/350	>80	4

ALWAYS USE

power supply



	CODE
500mA 6W	90214201
700mA 6W	90215203

more power supplies on page 588



STRIPE

WALL RECESSED



0.4

LED 1/2W | 350/700mA | 3Vf
PCB 3-step | excl. power supply
aluminium powder coated
brushed

0.09kg IP20 $\pm 0.3^\circ$ TC

25x56 40 2-18

3000K | >80 CRI | 90/150lm

	CODE
	305151W4
	305151L4
	305151B4

ALWAYS USE

power supply

	CODE
350mA 6W	90213202
700mA 6W	90215203

more power supplies on page 588

OPTIONAL

	CODE
recessed housing	
plasterkit	90012037

0.7

LED 1/2W | 350/700mA | 3Vf
PCB 3-step | excl. power supply
aluminium powder coated
brushed

0.10kg IP20 $\pm 0.3^\circ$ TC

25x56 40 2-18

3000K | >80 CRI | 90/150lm

	CODE
	305251W4
	305251L4
	305251B4

ALWAYS USE

power supply

	CODE
350mA 6W	90213202
700mA 6W	90215203

more power supplies on page 588

OPTIONAL

	CODE
recessed housing	
plasterkit	90012037

2.2

LED 1/2W | 350/700mA | 3Vf
PCB 3-step | excl. power supply
aluminium powder coated
brushed

0.27kg IP20 $\pm 0.3^\circ$ TC

25x170 40 2-18

3000K | >80 CRI | 90/150lm

	CODE
	305351W4
	305351L4
	305351B4

ALWAYS USE

power supply

	CODE
350mA 6W	90213202
700mA 6W	90215203

more power supplies on page 588


OPTIONAL

	CODE
recessed housing	
plasterkit	90012038



ORIS

WALL RECESSED



0.7

LED 1/2W | 350/700mA | 3Vf
PCB 3-step | excl. power supply
aluminium powder coated

0.28kg IP20

47x182 40 4-40

3000K | >80 CRI | 90/150lm

CODE
327161W4

ALWAYS USE


power supply

	CODE
350mA 6W	90213202
500mA 6W	90214201
700mA 6W	90215203

more power supplies on page 588

OPTIONAL

	CODE
recessed housing plasterkit	90012039
concrete housing	90012044



1.3

LED 2/4W | 350/700mA | 6Vf
PCB 3-step | excl. power supply
aluminium powder coated

0.34kg IP20

112x117 40 4-40

3000K | >80 CRI | 180/300lm

CODE
327261W4

ALWAYS USE


power supply

	CODE
350mA 6W	90213202
500mA 6W	90214201
700mA 6W	90215203

more power supplies on page 588

OPTIONAL

	CODE
recessed housing plasterkit	90012041
concrete housing	90012040



2.0

LED 2/4W | 350/700mA | 6Vf
PCB 3-step | excl. power supply
aluminium powder coated

0.42kg IP20

112x185 40 4-40

3000K | >80 CRI | 180/300lm

CODE
327361W4

ALWAYS USE

power supply

	CODE
350mA 6W	90213202
500mA 6W	90214201
700mA 6W	90215203

more power supplies on page 588

OPTIONAL

	CODE
recessed housing plasterkit	90012043
concrete housing	90012042




WALL SURFACE

p. 399 – 453



Explore our Designer Families from p. 23 -147



VENN
p. 399



SMILE ON
p. 403



SMILE
p. 405



BENTO
p. 407



BOX MINI
p. 427



BOX
p. 429



BENTA
p. 409



MOON
p. 411



LEENS
p. 413



MIRBI LONG IP44
p. 415



DOCUS MINI
p. 433



HEXO MINI
p. 435



RAY MINI
p. 437



RAY
p. 439



MIRBA IP44
p. 417



CENTRAL
p. 419



STATION
p. 421



TRAIN
p. 423



INCH
p. 443



MILES
p. 445



LIGHTDROP IP44
p. 451






ARZY
p. 453

back



SHOWROOM | GRANDO KEUKENS SINT-MARTENS-LATEM | BELGIUM

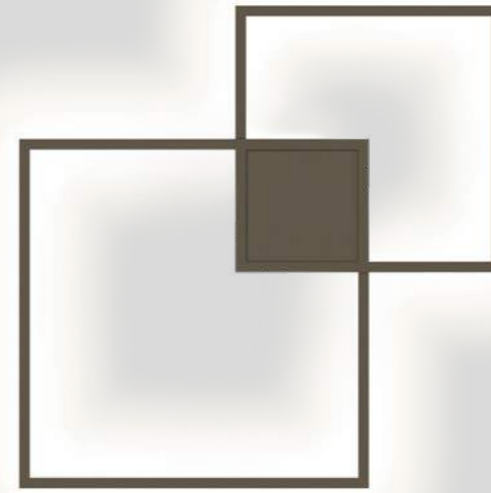

1.0

LED 38W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium powder coated
opal PMMA cover | indirect

2.50kg IP20

CODE
149184W
149184Q
149184B

DALI

CODE
149185W
149185Q
149185B

Light Colour Selection

LUMEN	CRI	CODE
2700K	2100 >80	2
3000K	2250 >80	4

2.0

LED 47W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim
aluminium powder coated
opal PMMA cover | direct/indirect

2.50kg IP20

CODE
149284W
149284Q
149284B

DALI

CODE
149285W
149285Q
149285B

Light Colour Selection

LUMEN	CRI	CODE
2700K	370/2100 >80	2
3000K	400/2250 >80	4

VENN UPDATE

WALL SURFACE




p. 233 p. 337



As awarded by The Chicago Athenaeum: Museum of Architecture and Design

DESIGNED BY S&R CORNELISSEN



WEVER & DUCRÉ 398 - 399





SMILE ON

WALL SURFACE



p. 489



1.0

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed


0.43kg IP65/IP20 0.3-1

3000K | >90 CRI | 370lm

CODE

702258W5

702258L5



2.0

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.65kg IP65/IP20 0.3-1

3000K | >90 CRI | 370lm

CODE

703258W5

703258L5




SMILE

WALL SURFACE



p. 491 p. 561



1.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

1.02kg IP65/IP20 0.3m

3000K | >80 CRI | 360lm

CODE

703354W4

703354L4

2.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed


0.87kg IP65/IP20 0.3m

3000K | >80 CRI | 360lm

CODE

703454W4



703454L4



back



BENTO UPDATE
WALL SURFACE



1.3

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.74kg IP20 ± 0.3 P

3000K | >90 CRI | 310lm

	CODE
	309274W5
	309274B5



3.6

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

1.48kg IP20 ± 0.3 P

3000K | >90 CRI | 310lm

	CODE
	309374W5
	309374B5



1.3

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.73kg | IP20 | >90 CRI | >3000h

3000K | >90 CRI | 310lm

	CODE
	310174W5
	310174B5

3.6

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated


1.25kg | IP20 | >90 CRI | >3000h

3000K | >90 CRI | 310lm

	CODE
	310274W5
	310274B5



MOON UPDATE
WALL SURFACE



1.0



LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

1.57kg | IP20 | 0.3-1 | P

3000K | >90 CRI | 310lm

CODE

308174W5



1.0

LED 4W | 220-240VAC | 50-60Hz
 COB 3-step | incl. PS | phase-cut dim
 aluminium powder coated
 brushed

1.1kg ⊕ IP20 ⌀=0,3+D Ⓢ

3000K | >90 CRI | 300lm

	CODE
	311174W5
	311174L5
	311174B5

2.0

2xLED 2W | 220-240VAC | 50-60Hz
 COB 3-step | incl. PS | phase-cut dim
 aluminium powder coated
 brushed


0.90kg ⊕ IP20 ⌀=0,3+D Ⓢ

3000K | >90 CRI | 2x150lm

	CODE
	311274W5
	311274L5
	311274B5




MIRBI long IP44 2019

WALL SURFACE



p. 221

p. 279



1.0

LED 6W | 220-240VAC
PCB 3-step | incl. PS
output selector | phase-cut dim
aluminium powder coated
clear + opal PMMA cover

0.72kg IP44

CODE

329184W

Light Colour Selection

	LUMEN	CRI	CODE
2700K	H 300 / L 190	>90	3
3000K	H 330 / L 210	>90	5

2.0

LED 12W | 220-240VAC
PCB 3-step | incl. PS
output selector | phase-cut dim
aluminium powder coated
clear + opal PMMA cover

1.53kg IP44

CODE

329284W

Light Colour Selection

	LUMEN	CRI	CODE
2700K	H 550 / L 320	>90	3
3000K	H 620 / L 365	>90	5

3.0

LED 18W | 220-240VAC
PCB 3-step | incl. PS
output selector | phase-cut dim
aluminium powder coated
clear + opal PMMA cover

2.25kg IP44


CODE

329384W

Light Colour Selection

	LUMEN	CRI	CODE
2700K	H 750 / L 550	>90	3
3000K	H 840 / L 610	>90	5

available from autumn 2019






back



MIRBA IP44

WALL SURFACE



1.0 LED

LED 9W | 220-240VAC
PCB 3-step | incl. PS
output selector | phase-cut dim
aluminium powder coated
opal PMMA cover

0.51kg IP44

CODE
328184W

Light Colour Selection

	LUMEN	CRI	CODE
2700K	L 320 / H 560	>90	3
3000K	L 360 / H 620	>90	5

2.0 LED

LED 12W | 220-240VAC
PCB 3-step | incl. PS
output selector | phase-cut dim
aluminium powder coated
opal PMMA cover

0.65kg IP44

CODE
328284W

Light Colour Selection

	LUMEN	CRI	CODE
2700K	L 530 / H 820	>90	3
3000K	L 590 / H 900	>90	5

3.0 LED


LED 18W | 220-240VAC
PCB 3-step | incl. PS
output selector | phase-cut dim
aluminium powder coated
opal PMMA cover

0.69kg IP44

CODE
328384W

Light Colour Selection

	LUMEN	CRI	CODE
2700K	L 610 / H 1050	>90	3
3000K	L 680 / H 1150	>90	5



back





CENTRAL

WALL SURFACE



p. 505



1.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

1.00kg IP20 3~0.3~D 6

3000K | >90 CRI | 520lm

CODE

313574W5

313574L5

2.0

2xLED 4W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.94kg IP20 3~0.3~D 6

3000K | >90 CRI | 2x260lm

CODE

313674W5

313674L5






STATION

WALL SURFACE



p. 507



1.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.86kg IP20 ±0.3°

3000K | >90 CRI | 520lm

CODE

314574W5

314574L5

2.0

2xLED 4W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.80kg IP20 ±0.3°

3000K | >90 CRI | 2x260lm

CODE

314674W5

314674L5




PRIVATE RESIDENCE BELGIUM

TRAIN

WALL SURFACE



p. 509



1.0

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.24kg IP20

3000K | >90 CRI | 420lm

CODE

719668W5

719668L5

2.0

2xLED 4W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed


0.35kg IP20

3000K | >90 CRI | 2x280lm

CODE

719768W5

719768L5



back

UNIVERSAL STARS

SIMPLE FORMALITY

Even if maths wasn't your favourite subject: You'll love these four stunning geometric shapes. BOX, DOCUS, HEXO, and RAY are hard to beat when it comes to elegance and flexibility. That makes them ideal for virtually any space. No matter if they sparkle from the ceiling or shine from the walls. The sleek, narrow luminaires are available in six great colours, as well as in many different versions. Also for use outdoors. They'll elicit an admiring "wow" from your dear friends and relatives right in the entrance area. Who would have thought that geometry could be so enthralling?

Auch wenn Mathematik nicht Ihr Lieblingsfach war: Diese vier atemberaubenden geometrischen Formen werden Sie lieben. BOX, DOCUS, HEXO und RAY sind in puncto Eleganz und Flexibilität nämlich kaum zu übertreffen. Und deshalb für nahezu jede Raumsituation geeignet. Ganz egal, ob man sie von der Decke blinzeln oder von den Wänden strahlen lässt. Denn die schlichten, schmalen Leuchten sind nicht nur in sechs tollen Farbtönen, sondern auch in vielen verschiedenen Ausführungen erhältlich. Auch für den Außenbereich. So kann man lieben Freunden und Verwandten schon im Eingangsbereich ein staunendes „Wow“ entlocken. Wer hätte gedacht, dass Geometrie so spannend sein kann?



HAVE A LOOK

weverducre.com/universalstars



BOX




DOCUS



HEXO




RAY

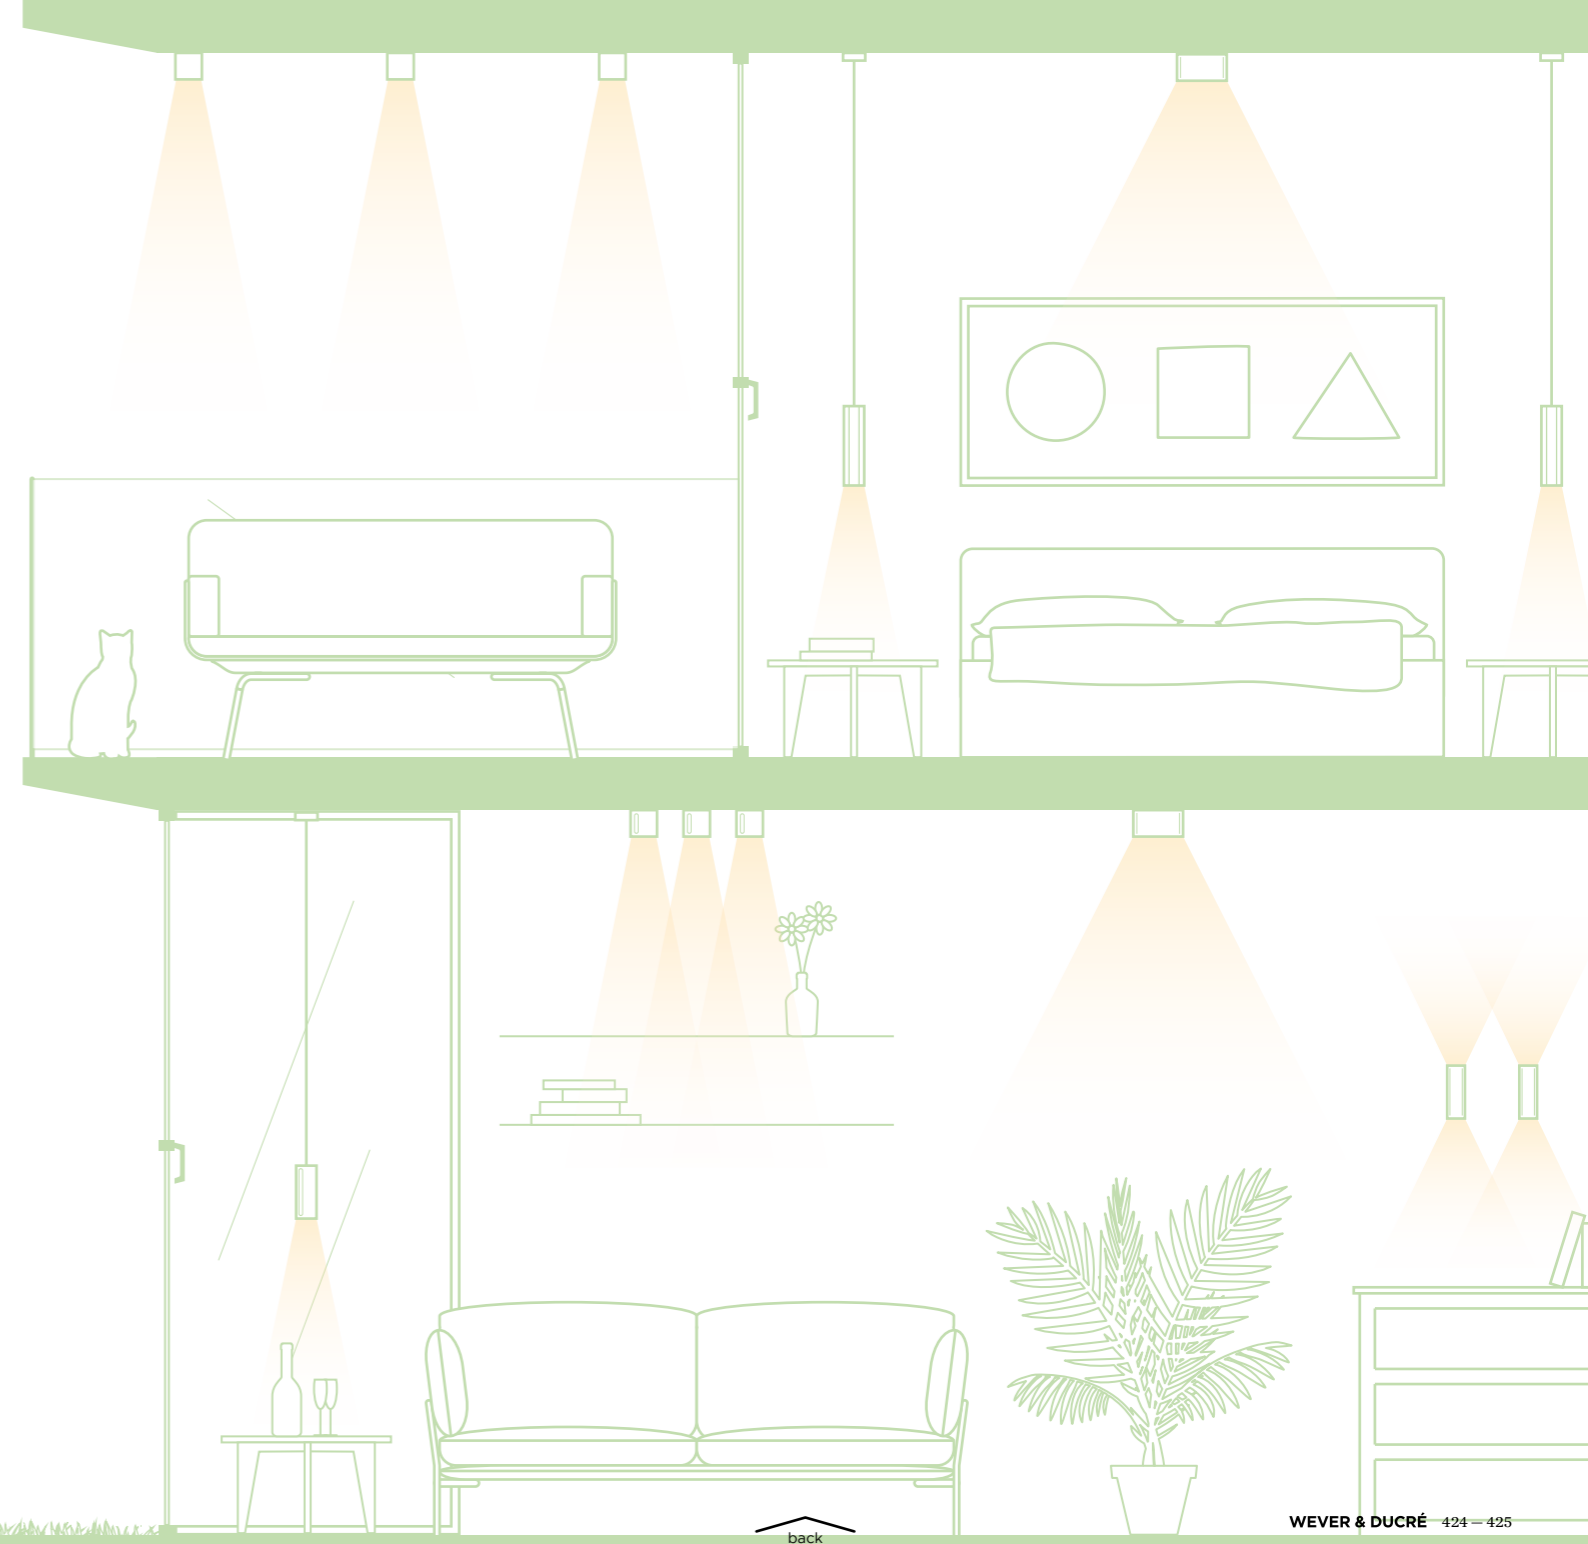



BOX mini

WALL SURFACE



1.0

PAR16 max.15W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.24kg IP20

wood

	CODE
	300120WNO

aluminium

	CODE
	300120W0
	300120L0
	300120P0
	300120B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593

2.0

2xPAR16 max.15W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.44kg IP20

wood

	CODE
	301120WNO

aluminium

	CODE
	301120W0
	301120L0
	301120P0
	301120B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim


	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593



BOX

WALL SURFACE



1.0 LED

LED 6W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated brushed
incl. flaps for adjustable beam angle

0.60kg IP20 $\pm 0.3^\circ$

wood


CODE
331168WN

aluminium

CODE
331168W
331168L
331168G
331168Q
331168P
331168B

Light Colour Selection

LUMEN	CRI	CODE
2700K	400 >80	2
3000K	440 >80	4
1800-2850K	400 >80	9



1.0 QT14

QT14 max. 75W | G9
220-240VAC | 50-60Hz
aluminium powder coated brushed

0.66kg IP20 $\pm 0.9^\circ$

wood

CODE
3211GOWN0

aluminium


CODE
3211GOW0
3211GOL0
3211GOG0
3211GOQ0
3211GOP0
3211GOB0

OPTIONAL

LUMEN	CRI	CODE
2700K 200lm		9019G705
3000K 300lm		9019G703

flaps for adjustable beam angle

CODE
900401W0



2.0 LED

2xLED 3W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated brushed
incl. flaps for adjustable beam angle

0.67kg IP20 $\pm 0.3^\circ$

wood


CODE
331148WN

aluminium

CODE
331148W
331148L
331148G
331148Q
331148P
331148B

Light Colour Selection

LUMEN	CRI	CODE
2700K	2x200 >80	2
3000K	2x220 >80	4
1800-2850K	2x200 >80	9



3.0 LED

2xLED 3W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated brushed
incl. flaps for adjustable beam angle

0.86kg IP20 $\pm 0.3^\circ$

wood

CODE
331248WN

aluminium

CODE
331248W
331248L
331248G
331248Q
331248P
331248B

Light Colour Selection



LUMEN	CRI	CODE
2700K	2x200 >80	2
3000K	2x220 >80	4
1800-2850K	2x200 >80	9





DOCUS mini

WALL SURFACE



1.0

PAR16 max.15W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.24kg IP20

	CODE
	300320W0
	300320L0
	300320G0
	300320P0
	300320B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593

2.0

2xPAR16 max.15W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.43kg IP20

	CODE
	301320W0
	301320L0
	301320G0
	301320P0
	301320B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim



	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593



HEXO mini

WALL SURFACE



1.0

PAR16 max.15W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.23kg IP20

	CODE
	300420G0
	300420Q0
	300420P0
	300420B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593

2.0

2xPAR16 max.15W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.40kg IP20

	CODE
	301420G0
	301420Q0
	301420P0
	301420B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim


	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593



RAY mini

WALL SURFACE



1.0

PAR16 max.15W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.21kg IP20

wood

	CODE
	300220WN0

aluminium


	CODE
	300220W0
	300220L0
	300220P0
	300220B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593



2.0

2xPAR16 max.15W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed

0.36kg IP20

wood

	CODE
	301220WN0

aluminium

	CODE
	301220W0
	301220L0
	301220P0
	301220B0

OPTIONAL

PAR16 LED GU10 7W
phase-cut dim





	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 593



RAY

WALL SURFACE



1.0 LED

LED 6W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated | brushed
incl. flaps for adjustable beam angle

0.62kg IP20 0.3°

CODE
332168W
332168L
332168G
332168Q
332168P
332168B

Light Colour Selection

LUMEN	CRI	CODE
2700K	400 >80	2
3000K	440 >80	4
1800-2850K	400 >80	9

1.0 QT14

QT14 max.75W | G9
220-240VAC | 50-60Hz
aluminium powder coated
brushed

0.62kg IP20 0.9°

CODE
3221G0W0
3221G0L0
3221G0G0
3221G0Q0
3221G0P0
3221G0B0

OPTIONAL

QT14 LED 3W

CODE	
2700K 200lm	9019G705
3000K 300lm	9019G703

flaps for adjustable beam angle

CODE
900401W0

2.0 LED

2xLED 3W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated | brushed
incl. flaps for adjustable beam angle

0.69kg IP20 0.3°

CODE
332148W
332148L
332148G
332148Q
332148P
332148B

Light Colour Selection

LUMEN	CRI	CODE
2700K	2x200 >80	2
3000K	2x220 >80	4
1800-2850K	2x200 >80	9

3.0 LED

2xLED 3W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated | brushed
incl. flaps for adjustable beam angle

0.85kg IP20 0.3°

CODE
332248W
332248L
332248G
332248Q
332248P
332248B

Light Colour Selection


LUMEN	CRI	CODE
2700K	2x200 >80	2
3000K	2x220 >80	4
1800-2850K	2x200 >80	9





INCH

WALL SURFACE



1.5

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.49kg IP20 $\pm 0.3^\circ$

3000K | >80 CRI | 480lm

	CODE
	312164W4
	312164B4




2.6

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.40kg IP20 $\pm 0.3^\circ$

3000K | >80 CRI | 480lm

	CODE
	312264W4
	312264B4





5.4

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed

0.65kg IP20 $\pm 0.3^\circ$

3000K | >80 CRI | 480lm

	CODE
	312364W4
	312364B4

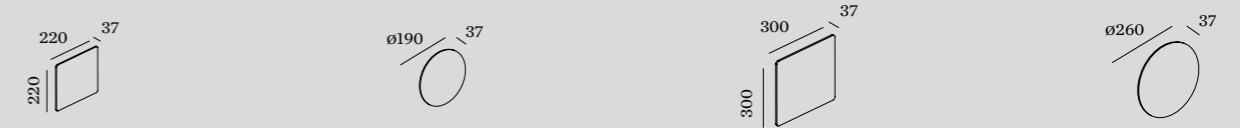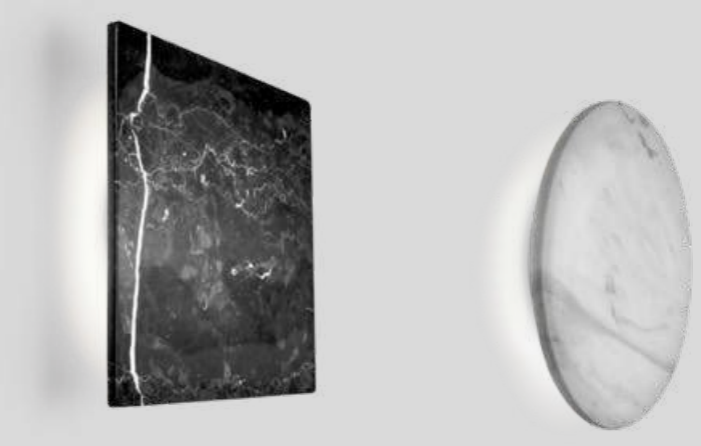

2.0 CARRÉ

LED 8W | 220-240VAC | 50-60Hz
AC PCBA 3-step low flicker | incl. PS
phase-cut dim | aluminium powder
coated | brushed

1.05kg IP20 $\approx -0,3^{\circ}$

3000K | >90 CRI | 430lm
marble | wood

Color	CODE
White	317474MW5
Marble	317474WN5
Wood	317474MB5

3000K | >90 CRI | 430lm | aluminium

Color	CODE
White	317474W5
Gold	317474G5
Orange	317474Q5
Red	317474P5
Black	317474B5

2.0 ROUND

LED 8W | 220-240VAC | 50-60Hz
AC PCBA 3-step low flicker | incl. PS
phase-cut dim | aluminium powder
coated | brushed

0.77kg IP20 $\approx -0,3^{\circ}$

3000K | >90 CRI | 430lm
marble | wood

Color	CODE
White	317574MW5
Marble	317574WN5
Wood	317574MB5

3000K | >90 CRI | 430lm | aluminium

Color	CODE
White	317574W5
Gold	317574G5
Orange	317574Q5
Red	317574P5
Black	317574B5

3.0 CARRÉ

LED 8W | 220-240VAC | 50-60Hz
AC PCBA 3-step low flicker | incl. PS
phase-cut dim | aluminium powder
coated | brushed

1.63kg IP20 $\approx -0,3^{\circ}$

3000K | >90 CRI | 430lm
marble | wood

Color	CODE
White	317674MW5
Marble	317674WN5
Wood	317674MB5

3000K | >90 CRI | 430lm | aluminium

Color	CODE
White	317674W5
Gold	317674G5
Orange	317674Q5
Red	317674P5
Black	317674B5

3.0 ROUND

LED 8W | 220-240VAC | 50-60Hz
AC PCBA 3-step low flicker | incl. PS
phase-cut dim | aluminium powder
coated | brushed

1.09kg IP20 $\approx -0,3^{\circ}$


3000K | >90 CRI | 430lm
marble | wood

Color	CODE
White	317774MW5
Marble	317774WN5
Wood	317774MB5

3000K | >90 CRI | 430lm | aluminium

Color	CODE
White	317774W5
Gold	317774G5
Orange	317774Q5
Red	317774P5
Black	317774B5





9.0


LED 30W | 220-240VAC | 50-60Hz
PCBA 3-step | incl. power supply
phase-cut dim | aluminium powder
coated | brushed

2.13kg IP20 0.3

3000K | >80 CRI | 1600lm
marble | wood

CODE	
	317274MW4
	317274WN4
	317274MB4

CODE	
	317274W4
	317274L4
	317274G4
	317274B4



12.0

LED 38W | 220-240VAC | 50-60Hz
PCBA 3-step | incl. power supply
phase-cut dim | aluminium powder
coated | brushed

2.62kg IP20 0.3

3000K | >80 CRI | 2200lm
marble | wood


CODE	
	317374MW4
	317374WN4
	317374MB4

CODE	
	317374W4
	317374L4
	317374G4
	317374B4



LIGHTDROP IP44

WALL SURFACE



1.2

QT14 max.40W | G9
220-240VAC | 50-60Hz
powder coated | chrome plated

0.41kg IP44

	CODE
	3071V0W0
	3071V0C0
	3071V0B0

OPTIONAL

QT14 LED 3W	CODE
2700K 200lm	9019G705

DESIGNED BY STUDIO MANGO


back

WEVER & DUCRÉ 450 - 451



ARZY

WALL SURFACE



1.0

LED 6W | 220-240VAC | 50-60Hz
 COB 3-step | incl. power supply
 stainless steel | powder coated
 chrome


1.56kg | IP20 | 0,3m | 1

3000K | >80 CRI | 380lm

	CODE
	325163W4
	325163C4
	325163B4



reddot design award
 winner 2010



OUT


DOOR

CEILING RECESSED

p. 458 – 459



INTRA
p. 459





[back](#)



INTRA

OUTDOOR
CEILING RECESSED



1.0 OPAL

LED 7W | 220-240VAC
PCB 3-step | incl. PS | phase-cut dim
aluminium | stainless steel
opal glass | polyamide

0.15kg IP65 \varnothing 91mm \varnothing 65mm

\varnothing 76 \varnothing 70 \varnothing 2-25

3000K | >90 CRI | 350lm | opal glass

	CODE
	733168W5
	733168I5
	733168D5
	733168B5

2.0 SPOT

LED 7W | 220-240VAC
PCB 3-step | incl. PS | phase-cut dim
aluminium | stainless steel
clear lens | polyamide

0.15kg IP65 \varnothing 91mm \varnothing 65mm \angle 38°

\varnothing 76 \varnothing 70 \varnothing 2-25

3000K | >80 CRI | 590lm | lens

	CODE
	733158W4
	733158I4
	733158D4
	733158B4

CEILING SURFACE

p. 463 – 475



BLAS 1.0
p. 463



BLAS 2.0
p. 463



BOX
p. 465



RAY
p. 469




TUBE CEILING
p. 471



TUBE CARRÉ CEILING
p. 473





ROB
p. 475

back



BLAS

OUTDOOR
CEILING SURFACE



1.0

LED 8W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated | glass

1kg IP65 $\pm 0.3^\circ$

3000K | >80 CRI | 640lm

	CODE
	736187W4
	736187D4
	736187B4

2.0

LED 8W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated | glass

1.3kg IP65 $\pm 0.3^\circ$


3000K | >80 CRI | 640lm

	CODE
	736287W4
	736287D4
	736287B4




BOX

OUTDOOR CEILING SURFACE



p. 249 p. 347 p. 429 p. 515



OPTIONAL

single inner reflector

CODE
911211W1
911211Q1
911211D1
911211B1

1.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.67kg | IP65 | 32°

CODE
735164W_
735164Q_
735164D_
735164B_

Light Colour Selection

LUMEN	CRI	CODE
2700K	580 >80	2
3000K	610 >80	4
1800-2850K	390 >95	9



inner cover

CODE
911011W1
911011Q1
911011D1
911011B1









RAY

OUTDOOR
CEILING SURFACE



1.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.63kg IP65 32°



	CODE
	735364W_
	735364D_
	735364B_

Light Colour Selection


	LUMEN	CRI	CODE
2700K	580	>80	2
3000K	610	>80	4
1800-2850K	390	>95	9

OPTIONAL

inner cover



	CODE
	911041W1
	911041D1
	911041B1



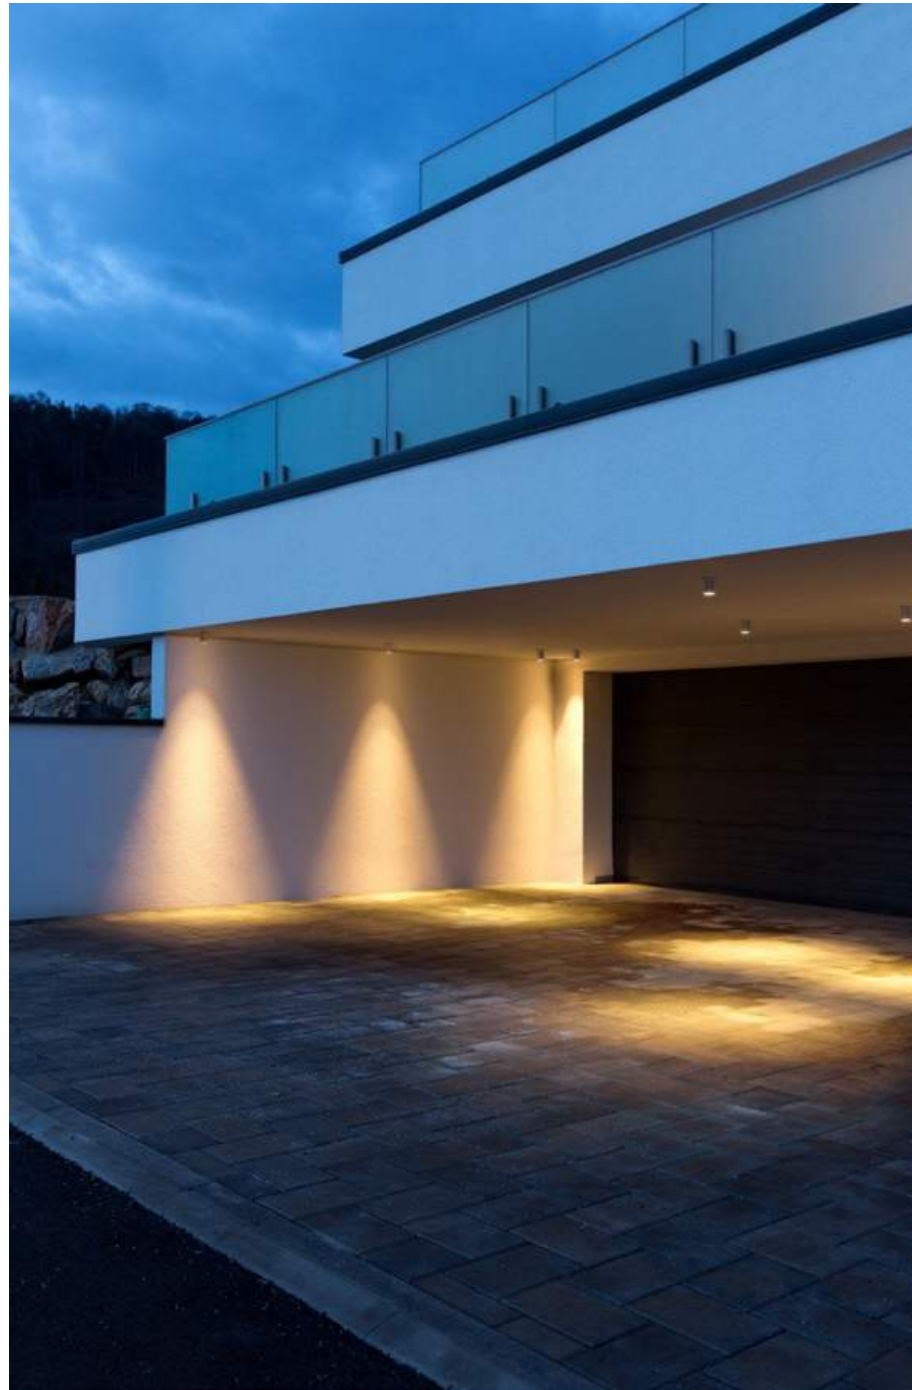

TUBE CEILING

**OUTDOOR
CEILING SURFACE**



1.0 LED

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.53kg | IP65 | 38°

3000K | >80 CRI | 440lm

Color	CODE
White	734164W4
Grey	734164D4
Black	734164B4

1.0 PAR16

PAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.60kg | IP65 | 0.9°

Color	CODE
White	734120W0
Grey	734120D0
Black	734120B0

OPTIONAL

PAR16 LED GU10 6W
phase-cut dim



Color	CODE
2700K	905228S2
3000K	905228S4
1800-2850K	901229S9

more lamps and specs on page 593



TUBE CARRÉ CEILING

**OUTDOOR
CEILING SURFACE**



1.0 LED

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.64kg IP65 0.3° 38°

3000K | >90 CRI | 380lm

Color	CODE
White	734264W5
Dark Grey	734264D5
Black	734264B5

1.0 PAR16

PAR16 max.10W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.69kg IP65 0.9°

Color	CODE
White	734220W0
Dark Grey	734220D0
Black	734220B0

OPTIONAL

PAR16 LED GU10 6W
phase-cut dim

Color	CODE
2700K	905228S2
3000K	905228S4
1800-2850K	901229S9

more lamps and specs on page 593





ROB UPDATE

**OUTDOOR
CEILING SURFACE**



p. 269



1.6

LED 13W | 220-240VAC | 50-60Hz
AC PCB 3-step low flicker
phase-cut dim | aluminium
powder coated | opal PMMA cover

0.70kg IP44 0.3 P

2700K | >90 CRI | 860lm

	CODE
	701184W3

3000K | >90 CRI | 950lm

	CODE
	701184W5

OPTIONAL

dimmer

	CODE
for switch	90019017
for din rail	90019018

more specs on page 591

2.6

LED 18W | 220-240VAC | 50-60Hz
AC PCB 3-step low flicker
phase-cut dim | aluminium
powder coated | opal PMMA cover

1.20kg IP44 0.3 P

2700K | >90 CRI | 1250lm

	CODE
	701284W3

3000K | >90 CRI | 1380lm

	CODE
	701284W5

OPTIONAL

dimmer

	CODE
for switch	90019017
for din rail	90019018

more specs on page 591

3.5

LED 32W | 220-240VAC | 50-60Hz
AC PCB 3-step low flicker
phase-cut dim | aluminium
powder coated | opal PMMA cover

1.90kg IP44 0.3 P

2700K | >90 CRI | 1820lm

	CODE
	701384W3

3000K | >90 CRI | 1950lm


	CODE
	701384W5

OPTIONAL

dimmer

	CODE
for switch	90019017
for din rail	90019018

more specs on page 591



WALL RECESSED

p. 479 – 485



SMILE IN 1.0
p. 479



SMILE IN 2.0
p. 479



ORIS 2.0
p. 481




ORIS 0.7
p. 481



ATIM
p. 483



ATIM CARRÉ
p. 485



back





SMILE IN

**OUTDOOR
WALL RECESSED**



p. 383



1.0

LED 4/6W | 350/500mA | 9Vf
COB 3-step | excl. power supply
aluminium powder coated

0.39kg IP65

86 40 4-40

3000K | >80 CRI | 230/320lm

	CODE
	702151W4
	702151D4

ALWAYS USE

power supply IP67

	CODE
350mA 7W	90213301
500mA 7W	90214301

more power supplies on page 590

OPTIONAL

	CODE
recessed housing	90012030

2.0

LED 4/6W | 350/500mA | 9Vf
COB 3-step | excl. power supply
aluminium powder coated

0.42kg IP65

86 40 4-40

3000K | >80 CRI | 230/320lm

	CODE
	703151W4
	703151D4

ALWAYS USE

power supply IP67

	CODE
350mA 7W	90213301
500mA 7W	90214301




more power supplies on page 590

OPTIONAL

	CODE
recessed housing	90012030



ORIS
OUTDOOR
WALL RECESSED



0.7

LED 1/2W | 350/700mA | 3Vf
PCB 3-step | excl. power supply
aluminium powder coated

0.28kg IP65 $\pm 0.3^\circ$

47x182 40 4-40

3000K | >80 CRI | 90/150lm

	CODE
	709161W4
	709161D4

ALWAYS USE

power supply IP66

	CODE
350mA 3W	90213101
700mA 3W	90215101

more power supplies on page 590

OPTIONAL

	CODE
recessed housing plasterkit	90012039
concrete housing	90012044

1.3

LED 2/4W | 350/700mA | 6Vf
PCB 3-step | excl. power supply
aluminium powder coated

0.34kg IP65 $\pm 0.3^\circ$

112x117 40 4-40

3000K | >80 CRI | 180/300lm

	CODE
	709261W4
	709261D4

ALWAYS USE

power supply IP66

	CODE
350mA 3W	90213101
700mA 6W	90215301

more power supplies on page 590

OPTIONAL

	CODE
recessed housing plasterkit	90012041
concrete housing	90012040

2.0

LED 2/4W | 350/700mA | 6Vf
PCB 3-step | excl. power supply
aluminium powder coated

0.42kg IP65 $\pm 0.3^\circ$

112x185 40 4-40

3000K | >80 CRI | 180/300lm

	CODE
	709361W4
	709361D4

ALWAYS USE

power supply IP66

	CODE
350mA 3W	90213101
700mA 6W	90215301


more power supplies on page 590

OPTIONAL

	CODE
recessed housing plasterkit	90012043
concrete housing	90012042



ATIM
OUTDOOR
WALL RECESSED



1.0 LED

LED 6W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
stainless steel | satinated glass

0.85kg | IP65 | 0.3m | 16

82x193 | 95

3000K | >80 CRI | 380lm

CODE
710184I4

OPTIONAL


CODE
louvre long 90019106

back



ATIM CARRÉ

OUTDOOR
WALL RECESSED



2.0 LED

LED 6W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
stainless steel | satinated glass

0.65kg | IP65 | 0.3+D | 16

108x108 | 86

3000K | >80 CRI | 380lm

CODE

71028414

OPTIONAL

CODE

louvre carré 90019105



back

WALL SURFACE

p. 489 – 527



SMILE ON 1.0
p. 489



SMILE ON 2.0
p. 489



SMILE
p. 491



TAPE
p. 493




TUBE
p. 495



TUBE CARRÉ 1.0
p. 499



TUBE CARRÉ 2.0
p. 501



GETTON
p. 503



BOX
p. 515



BOXX
p. 519



RAY
p. 521



CENTRAL
p. 505



STATION
p. 507



TRAIN
p. 509



TRAIN NARROW
p. 513



PALOS 1.0
p. 523



PALOS 2.0
p. 525



X-BEAM
p. 527




SMILE ON

OUTDOOR
WALL SURFACE



p. 403



1.0

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.43kg IP65

3000K | >90 CRI | 370lm

CODE

702258W5

702258D5

2.0

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.65kg IP65

3000K | >90 CRI | 370lm

CODE

703258W5

703258D5





SMILE

OUTDOOR WALL SURFACE



p. 405

p. 561



1.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

1.02kg | IP65 | >80 CRI | >3000h

3000K | >80 CRI | 360lm

CODE

703354W4

703354D4

2.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.87kg | IP65 | >80 CRI | >3000h

3000K | >80 CRI | 360lm

CODE

703454W4


703454D4



PRIVATE RESIDENCE | HERZBLUT DESIGN AUSTRIA

TAPE

OUTDOOR
WALL SURFACE



1.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated


0.73kg | IP65 | 0.3

3000K | >90 CRI | 420lm

CODE

722174W5

722174D5



back



TUBE

OUTDOOR
WALL SURFACE



1.0 LED

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.45kg | IP65 | >0.3° | 38°

3000K | >90 CRI | 390lm

Color	CODE
White	711164W5
Grey	711164D5
Black	711164B5

1.0 PAR16

PAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.52kg | IP65 | >0.9° | 38°

Color	CODE
White	711120W0
Grey	711120D0
Black	711120B0

OPTIONAL

PAR16 LED GU10 6W
phase-cut dim



Color	CODE
2700K	905228S2
3000K	905228S4
1800-2850K	901229S9

more lamps and specs on page 593



TUBE

OUTDOOR
WALL SURFACE



2.0 LED

2xLED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.74kg | IP65 | 38°

3000K | >90 CRI | 2x390lm

Color	CODE
White	711264W5
Grey	711264D5
Black	711264B5

2.0 PAR16

2xPAR16 max.35W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.90kg | IP65 | 38°

3000K | >90 CRI | 2x390lm

Color	CODE
White	711220W0
Grey	711220D0
Black	711220B0

OPTIONAL

PAR16 LED GU10 6W
phase-cut dim



Color	CODE
2700K	905228S2
3000K	905228S4
1800-2850K	901229S9

more lamps and specs on page 593



TUBE CARRÉ

OUTDOOR
WALL SURFACE



1.0 LED

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.66kg | IP65 | $\pm 0.3^{\circ}$ | 38°

3000K | >90 CRI | 390lm

Color	CODE
White	744164W5
Grey	744164D5
Black	744164B5

1.0 PAR16

PAR16 max.10W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

0.71kg | IP65 | $\pm 0.9^{\circ}$ | 6°

Color	CODE
White	744120W0
Grey	744120D0
Black	744120B0

OPTIONAL

PAR16 LED GU10 6W
phase-cut dim



Color	CODE
2700K	905228S2
3000K	905228S4
1800-2850K	901229S9

more lamps and specs on page 593



TUBE CARRÉ

OUTDOOR
WALL SURFACE



2.0 LED

2xLED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

1kg | IP65 | 38°

3000K | >90 CRI | 2x390lm

Color	CODE
White	744264W5
Dark Grey	744264D5
Black	744264B5

2.0 PAR16

2xPAR16 max.10W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

1.05kg | IP65 | 38°

3000K | >90 CRI | 2x390lm




Color	CODE
White	744220W0
Dark Grey	744220D0
Black	744220B0

OPTIONAL

PAR16 LED GU10 6W
phase-cut dim

Color	CODE
2700K	905228S2
3000K	905228S4
1800-2850K	901229S9

more lamps and specs on page 593



1.0

LED 8W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated
opal glass

0.83kg IP65 0.3m

3000K | >80 CRI | 665lm

	CODE
	717474W4
	717474D4

OPTIONAL

big cover

	CODE
	911141W1
	911141D1

more details on page 610

2.0

LED 8W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated
clear glass

0.83kg IP65 0.3m

3000K | >80 CRI | 720lm

	CODE
	717374W4
	717374D4

OPTIONAL

big cover

	CODE
	911141W1
	911141D1

more details on page 610





CENTRAL

OUTDOOR
WALL SURFACE



p. 419



1.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.91kg | IP65 | >0,3-1 | 6

3000K | >90 CRI | 520lm

	CODE
	313774W5
	313774D5
	313774B5


2.0

2xLED 4W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.91kg | IP65 | >0,3-1 | 6

3000K | >90 CRI | 2x260lm

	CODE
	313874W5
	313874D5
	313874B5



back






PRIVATE RESIDENCE AUSTRIA

STATION

OUTDOOR
WALL SURFACE



p. 421



1.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.86kg IP65

3000K | >90 CRI | 520lm

	CODE
	314774W5
	314774D5
	314774B5


2.0

2xLED 4W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.80kg IP65

3000K | >90 CRI | 2x260lm

	CODE
	314874W5
	314874D5
	314874B5






TRAIN

OUTDOOR
WALL SURFACE



p. 423



1.0

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.24kg IP65

3000K | >90 CRI | 420lm

	CODE
	719868W5
	719868D5
	719868B5

2.0

2xLED 4W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.35kg IP65

3000K | >90 CRI | 2x280lm


	CODE
	719968W5
	719968D5
	719968B5



PRIVATE RESIDENCE CZECH REPUBLIC




[back](#)

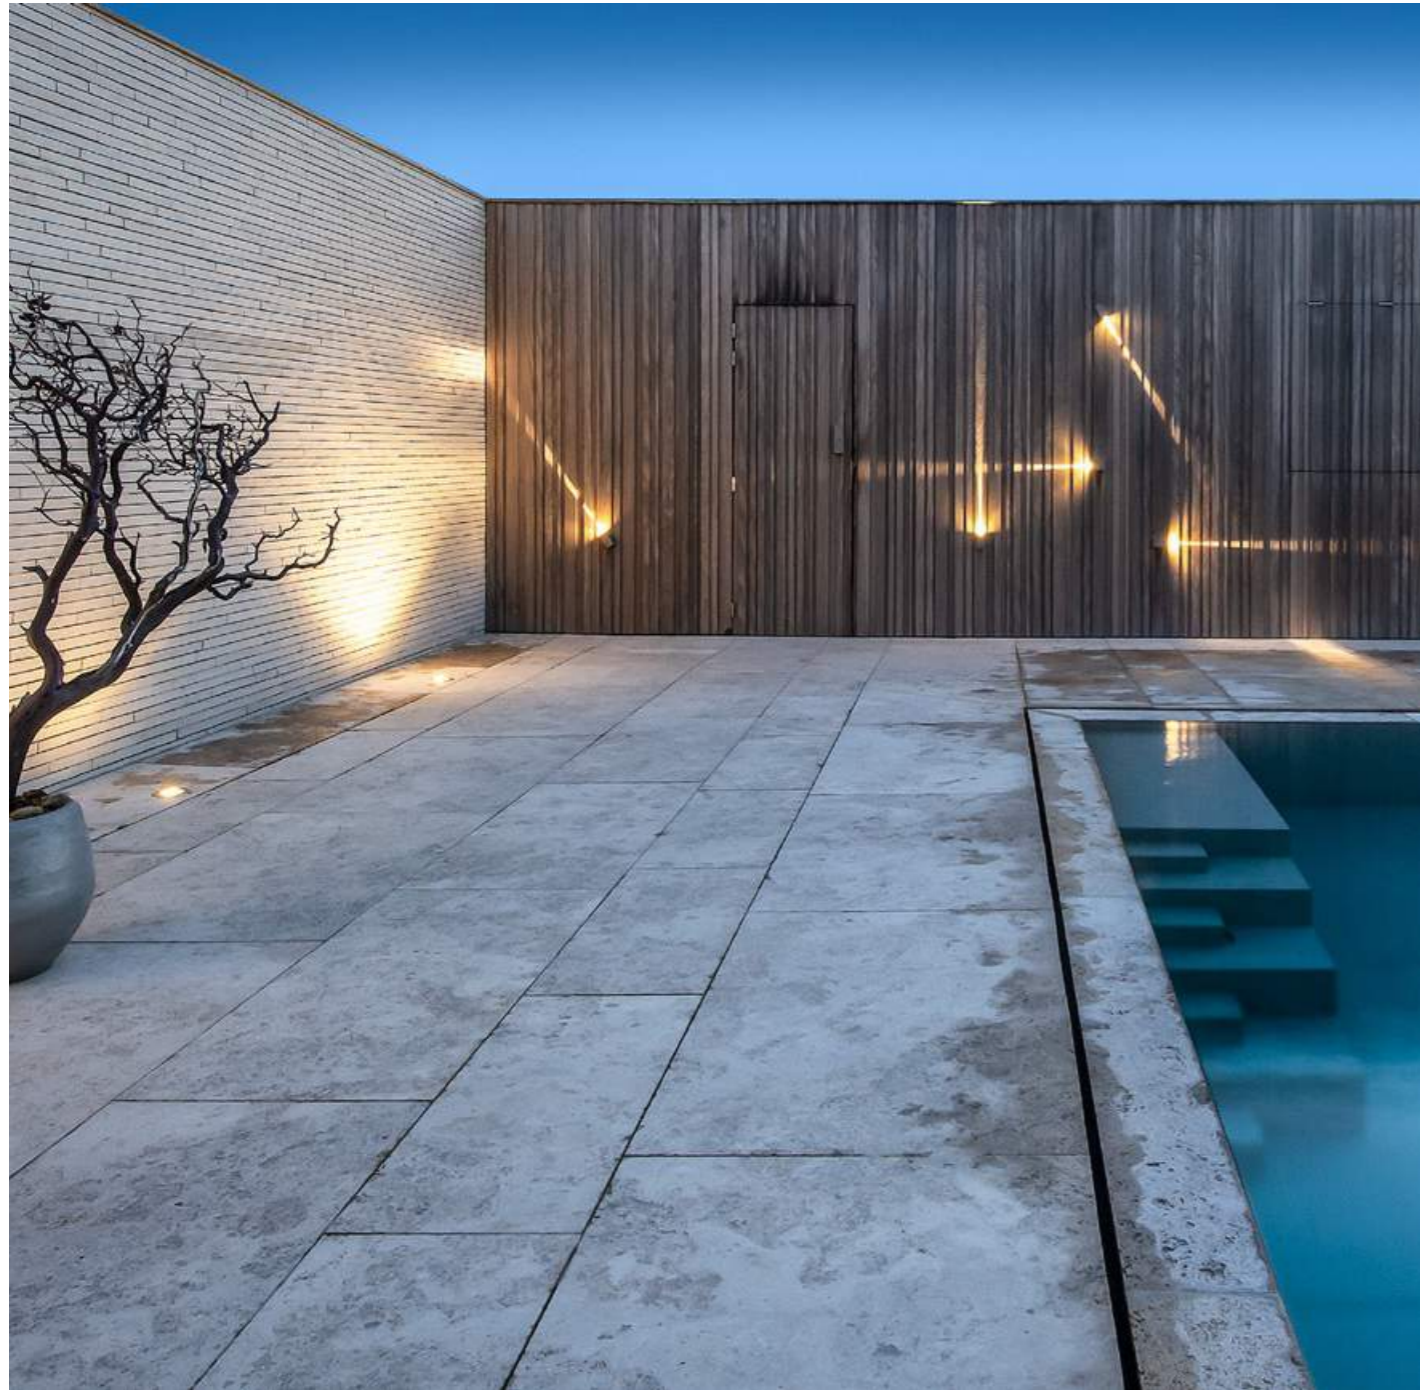

TRAIN NARROW

**OUTDOOR
WALL SURFACE**



1.0

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. power supply
aluminium powder coated

0.24kg IP65

3000K | >80 CRI | 420lm
narrow up or narrow down

CODE

719143D4

2.0

2xLED 3W | 220-240VAC | 50-60Hz
COB 3-step | incl. power supply
aluminium powder coated

0.35kg IP65

3000K | >80 CRI | 2x250lm
narrow up/narrow down

CODE

719243D4

3000K | >80 CRI | 2x250lm
narrow up/flood down






CODE

719253D4



BOX

OUTDOOR WALL SURFACE



1.0

LED 6W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated
incl. flaps for adjustable beam angle

0.60kg IP65

Color	CODE
White	740168W
Gold	740168Q
Grey	740168D
Black	740168B

Light Colour Selection

Light Colour	LUMEN	CRI	CODE
2700K	400	>80	2
3000K	440	>80	4

2.0

2xLED 3W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated
incl. flaps for adjustable beam angle

0.66kg IP65

Color	CODE
White	740148W
Gold	740148Q
Grey	740148D
Black	740148B

Light Colour Selection

Light Colour	LUMEN	CRI	CODE
2700K	2x200	>80	2
3000K	2x220	>80	4

3.0

LED 6W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated
incl. flaps for adjustable beam angle

0.67kg IP65

Color	CODE
White	740268W
Gold	740268Q
Grey	740268D
Black	740268B

Light Colour Selection

Light Colour	LUMEN	CRI	CODE
2700K	400	>80	2
3000K	440	>80	4

4.0

2xLED 3W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated
incl. flaps for adjustable beam angle

0.86kg IP65

Color	CODE
White	740248W
Gold	740248Q
Grey	740248D
Black	740248B

Light Colour Selection


Light Colour	LUMEN	CRI	CODE
2700K	2x200	>80	2
3000K	2x220	>80	4





BOXX

OUTDOOR WALL SURFACE



1.0

LED 2x 2xLED 3W | 220-240VAC
 50-60Hz | PCB 3-step | incl. PS
 phase-cut dim | aluminium powder
 coated | incl. flaps for adjustable
 beam angle

0.93kg | IP65 | 0.3°

CODE	
	739148W
	739148D
	739148B


Light Colour Selection

	LUMEN	CRI	CODE
2700K	2x400	>80	2
3000K	2x440	>80	4




RAY

OUTDOOR WALL SURFACE



p. 265 p. 355 p. 439 p. 469



1.0


LED 6W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated
incl. flaps for adjustable beam angle

0.47kg IP65

Color	CODE
White	741168W
Grey	741168D
Black	741168B

Light Colour Selection

Color	LUMEN	CRI	CODE
2700K	400	>80	2
3000K	440	>80	4



2.0


2xLED 3W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated
incl. flaps for adjustable beam angle

0.47kg IP65

Color	CODE
White	741148W
Grey	741148D
Black	741148B

Light Colour Selection

Color	LUMEN	CRI	CODE
2700K	2x200	>80	2
3000K	2x220	>80	4



3.0


LED 6W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated
incl. flaps for adjustable beam angle

0.53kg IP65

Color	CODE
White	741268W
Grey	741268D
Black	741268B

Light Colour Selection

Color	LUMEN	CRI	CODE
2700K	400	>80	2
3000K	440	>80	4



4.0

2xLED 3W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated
incl. flaps for adjustable beam angle

0.53kg IP65

Color	CODE
White	741248W
Grey	741248D
Black	741248B

Light Colour Selection

Color	LUMEN	CRI	CODE
2700K	2x200	>80	2
3000K	2x220	>80	4




PALOS UPDATE

**OUTDOOR
WALL SURFACE**



p. 567



1.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

1.55kg | IP65 | -0,3-D | G

3000K | >90 CRI | 520lm

	CODE
	716174W5
	716174D5
	716174A5

back




PALOS UPDATE

OUTDOOR
WALL SURFACE



p. 569



2.0

2xLED8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

1.86kg | IP65 | $\pm 0,3$ | \odot

3000K | >90 CRI | 2x520lm



CODE

	716274W5
	716274D5
	716274A5



X-BEAM

OUTDOOR
WALL SURFACE



1.0

LED 18W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

1.28kg IP65
 \varnothing 0,3+D \odot Δ 120°

\odot 0/110°

3000K | >80 CRI | 1040lm

CODE

700364D4

OPTIONAL

CODE

snoot **90019023**

2.0

LED 16W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

1.28kg IP65
 \varnothing 0,3+D \odot 9x Δ 12°

\odot 0/110°

3000K | >80 CRI | 895lm

CODE

700354D4

OPTIONAL

CODE

snoot **90019023**



back

FLOOR RECESSED

p. 531 – 539



CARD
p. 531



MAP
p. 533



MAP ASYM
p. 535



CHART
p. 537


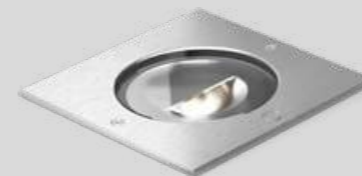


CHART ASYM
p. 539






back



CARD

OUTDOOR
FLOOR RECESSED



0.1

LED 1W | 350mA | 3Vf
PCB 3-step | excl. power supply
stainless steel | glass
aluminium powder coated

0.05kg IP67 IK07 $\approx 0.3^\circ$
16°

22 60

3000K | >80 CRI | 50lm

CODE
750161I4

0.2

LED 1W | 350mA | 3Vf
PCB 3-step | excl. power supply
stainless steel | glass
aluminium powder coated

0.06kg IP67 IK07 $\approx 0.3^\circ$
16°

22 60

3000K | >80 CRI | 50lm

CODE
750261I4

0.3

LED 1W | 350mA | 3Vf
PCB 3-step | excl. power supply
stainless steel | glass
aluminium powder coated

0.06kg IP67 IK07 $\approx 0.3^\circ$
16°

22 60

3000K | >80 CRI | 50lm

CODE
750361I4

ALWAYS USE


power supply IP66
CODE
350mA | 3W 90213101

ALWAYS USE

power supply IP66
CODE
350mA | 3W 90213101

ALWAYS USE


power supply IP66
CODE
350mA | 3W 90213101



back



MAP
OUTDOOR
FLOOR RECESSED



0.6

LED 5W | 220-240VAC | 50-60Hz
COB 3-step | incl. power supply
stainless steel | glass
aluminium powder coated

0.38kg IP67 IK08 0.3-10 38°


41 100

3000K | >80 CRI | 220lm

CODE
751163I4

OPTIONAL

recessed housing 90012201



0.9

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
stainless steel | glass
aluminium powder coated

0.70kg IP67 IK08 0.3-10 38°


78 135

3000K | >80 CRI | 470lm

CODE
751264I4

OPTIONAL

recessed housing 90012202



1.2

LED 12W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
stainless steel | glass
aluminium powder coated

1.01kg IP67 IK08 0.3-10 38°


110 120

3000K | >80 CRI | 750lm

CODE
751364I4

OPTIONAL

recessed housing 90012203



1.6

LED 15W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
stainless steel | glass
aluminium powder coated

1.01kg IP67 IK09 0.3-10 38°

150 185

3000K | >80 CRI | 950lm

CODE
751464I4


OPTIONAL

recessed housing 90012204



MAP ASYM

**OUTDOOR
FLOOR RECESSED**



1.2

LED 10W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
stainless steel | glass
aluminium powder coated

1.06kg IP67 IK08 \varnothing -0.3-D
T6


110 \varnothing 160

3000K | >80 CRI | 450lm
asymmetric reflector

CODE
75155714

OPTIONAL

CODE
recessed housing 90012203



1.6

LED 15W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
stainless steel | glass
aluminium powder coated

1.72kg IP67 IK09 \varnothing -0.3-D
T6

150 \varnothing 185

3000K | >80 CRI | 550lm
asymmetric reflector

CODE
75165714

OPTIONAL


CODE
recessed housing 90012204





CHART

OUTDOOR
FLOOR RECESSED



0.6


LED 5W | 220-240VAC | 50-60Hz
COB 3-step | incl. power supply
stainless steel | glass
aluminium powder coated

0.39kg IP67 IK08 $\approx 0.3^\circ$ $\triangle 38^\circ$

45 ≈ 118

3000K | >80 CRI | 220lm

CODE
75216314



0.9


LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
stainless steel | glass
aluminium powder coated

0.70kg IP67 IK08 $\approx 0.3^\circ$ $\triangle 38^\circ$

78 ≈ 135

3000K | >80 CRI | 470lm

CODE
75226414



1.2


LED 12W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
stainless steel | glass
aluminium powder coated

1.05kg IP67 IK08 $\approx 0.3^\circ$ $\triangle 38^\circ$

110 ≈ 175

3000K | >80 CRI | 750lm

CODE
75236414



1.6

LED 15W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
stainless steel | glass
aluminium powder coated

1.05kg IP67 IK09 $\approx 0.3^\circ$ $\triangle 38^\circ$

150 ≈ 185

3000K | >80 CRI | 950lm

CODE
75246414

OPTIONAL

CODE
recessed housing 90012201

OPTIONAL

CODE
recessed housing 90012202

OPTIONAL

CODE
recessed housing 90012203

OPTIONAL

CODE
recessed housing 90012204








CHART ASYM

**OUTDOOR
FLOOR RECESSED**



1.2

LED 10W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
stainless steel | glass

1.10kg IP67 IK08 0.3-10
16

110 160

3000K | >80 CRI | 450lm
asymmetric reflector

CODE
75255714

OPTIONAL

CODE
recessed housing 90012203

1.6

LED 15W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
stainless steel | glass

1.83kg IP67 IK09 0.3-10
16

150 185

3000K | >80 CRI | 550lm
asymmetric reflector

CODE
75265714

OPTIONAL

CODE
recessed housing 90012204



FLOOR SURFACE

p. 543 – 569



COSTA 1.0
p. 543



COSTA 2.0
p. 545



TAPE
p. 549



PACE
p. 551



SMILE
p. 561



FIFTY FIFTY
p. 563



GETTON
p. 553



LINUS
p. 555



EDGE
p. 557



PALLUZ C
p. 559




SWAY
p. 565




PALOS 1.0
p. 567





PALOS 2.0
p. 569



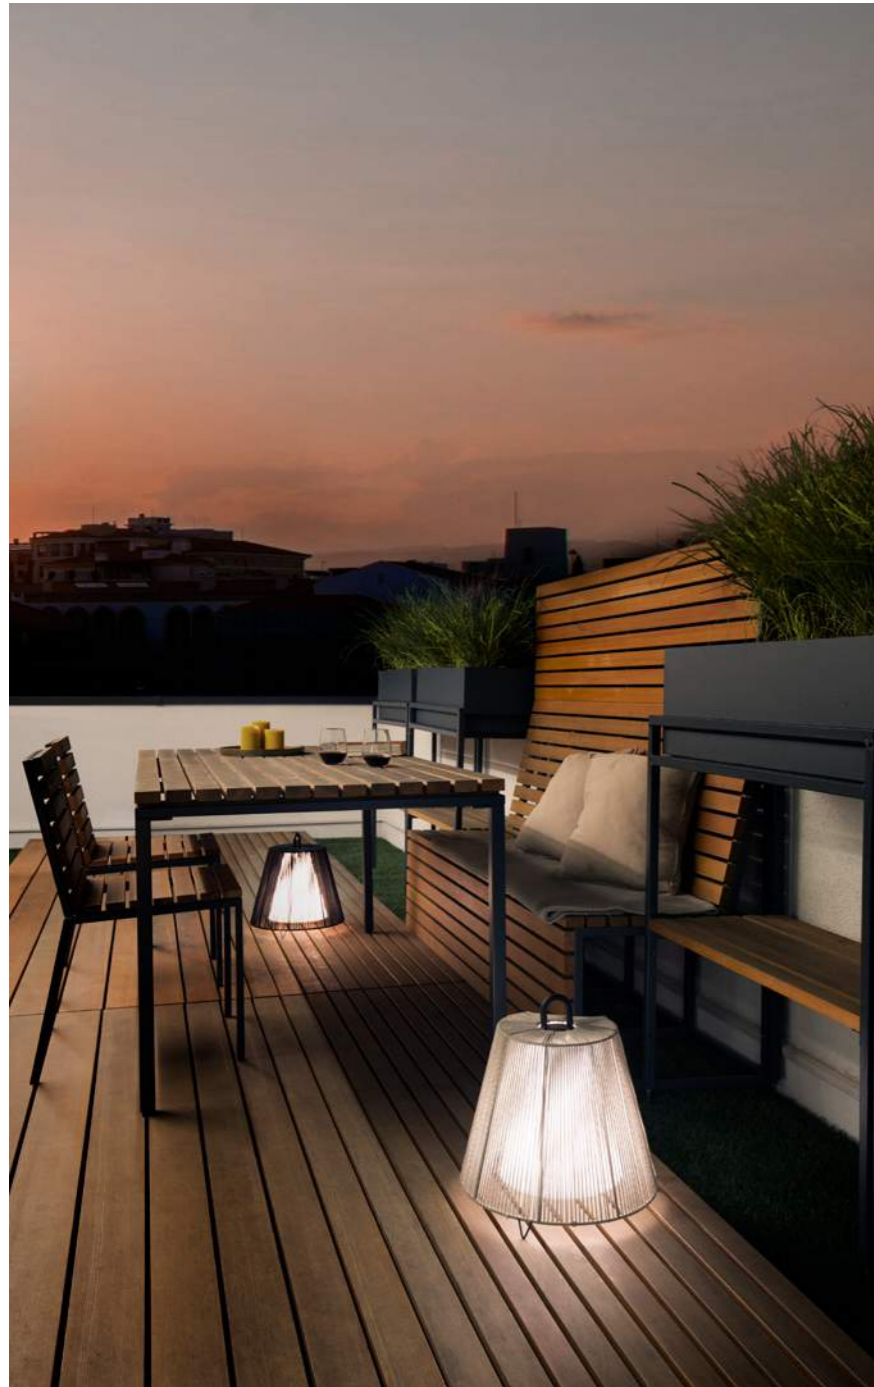

COSTA



OUTDOOR
FLOOR SURFACE

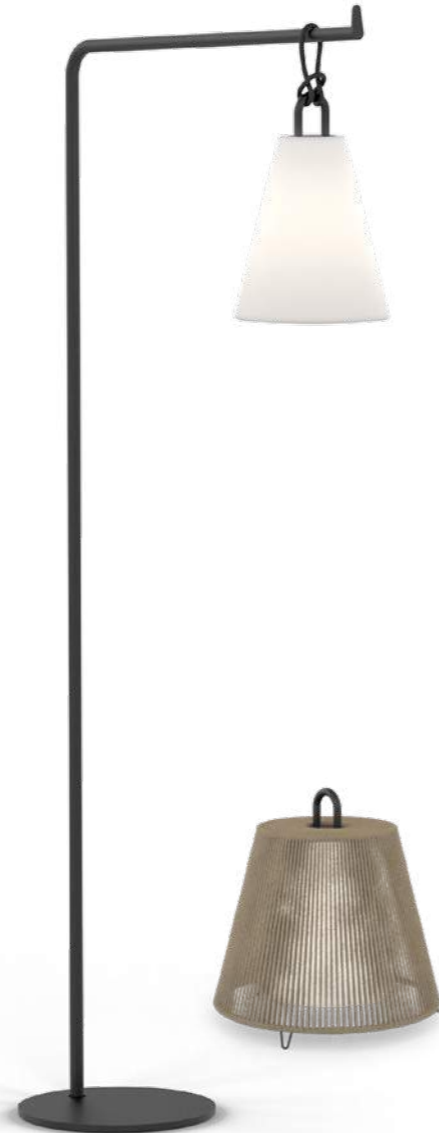

1.0 LED

2x LED channels 1.5W | 120lm
110-220VAC | 2200-4000K
rechargeable li-ion battery
incl. charger | light for 8 hours
recharging time 5 hours
polyethylene | polypropylene

0.90kg IP65

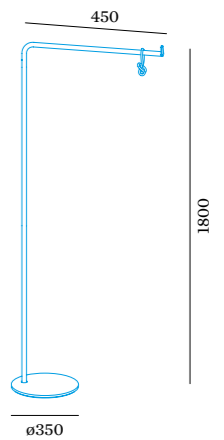

handle colour

	CODE
	865186YE9
	865186OR9
	865186SB9
	865186B9

OPTIONAL

1.0 rope

	CODE
	90057171
	90057170

OPTIONAL

pole

	CODE
	90056001





HOTEL YURBBAN BARCELONA | SPAIN



COSTA

OUTDOOR
FLOOR SURFACE

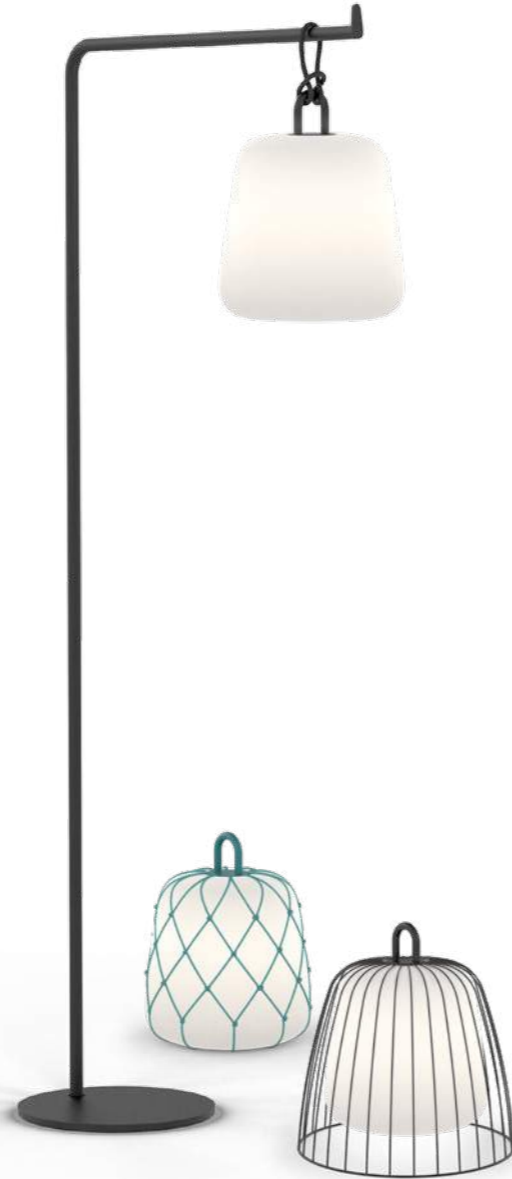

2.0 LED

2x LED channels 1.5W | 120lm
110-220VAC | 2200-4000K
rechargeable li-ion battery
incl. charger | light for 8 hours
recharging time 5 hours
polyethylene | polypropylene

1.10kg IP65

handle colour


handle colour	CODE
	865286YE9
	865286OR9
	865286SB9
	865286OB9



OPTIONAL

2.0 rope


2.0 rope	CODE
	90057192
	90057191
	90057193
	90057190



OPTIONAL

2.1 cage


2.1 cage	CODE
	90057182
	90057181
	90057183
	90057180

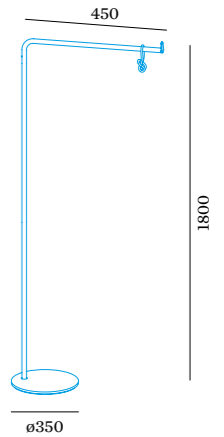

OPTIONAL


pole

pole	CODE
	90056001



back





4.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated


1.92kg IP65 $\pm 0.3 \cdot D$

3000K | >90 CRI | 420lm

	CODE
	722274W5
	722274D5

OPTIONAL

	CODE
ground spike	90013102



6.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated


2.60kg IP65 $\pm 0.3 \cdot D$

3000K | >90 CRI | 420lm

	CODE
	722374W5
	722374D5

OPTIONAL

	CODE
ground spike	90013102



8.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated


3.10kg IP65 $\pm 0.3 \cdot D$

3000K | >90 CRI | 420lm

	CODE
	722474W5
	722474D5

OPTIONAL

	CODE
ground spike	90013102



4.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated


1.00kg IP65 \pm 0,3-D

3000K | >90 CRI | 420lm

	CODE
	723174W5
	723174D5
	723174B5

OPTIONAL

	CODE
ground spike	90013102



6.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated


1.33kg IP65 \pm 0,3-D

3000K | >90 CRI | 420lm

	CODE
	723274W5
	723274D5
	723274B5

OPTIONAL

	CODE
ground spike	90013102



8.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated


1.61kg IP65 \pm 0,3-D

3000K | >90 CRI | 420lm

	CODE
	723374W5
	723374D5
	723374B5

OPTIONAL

	CODE
ground spike	90013102



back




GETTON

OUTDOOR FLOOR SURFACE



p. 503



1.0

LED 8W | 220-240VAC | 50-60Hz
 PCB 3-step | incl. PS | phase-cut dim
 aluminium powder coated

0.80kg IP65 $\pm 0.3^\circ$

3000K | >80 CRI | 665lm | opal glass


CODE
 717574D4

ALWAYS USE

CODE
 base 400 910052D0
 base 600 910054D0
 base 800 910058D0

OPTIONAL

CODE
 ground spike 90013101



2.0

LED 8W | 220-240VAC | 50-60Hz
 PCB 3-step | incl. PS | phase-cut dim
 aluminium powder coated

0.80kg IP65 $\pm 0.3^\circ$

3000K | >80 CRI | 720lm | clear glass

CODE
 717674D4

ALWAYS USE


CODE
 base 400 910052D0
 base 600 910054D0
 base 800 910058D0

OPTIONAL

CODE
 ground spike 90013101



**OUTDOOR
FLOOR SURFACE**



1.0

LED 7W | 220-240VAC | 50-60Hz
COB 3-step | incl. power supply
aluminium powder coated

0.95kg IP65 3-0.3-1 G

3000K | >80 CRI | 320lm

	CODE
	726173D4
	726173Y4
	726173A4

ALWAYS USE


	CODE
base 150	
	910024D0
	910024Y0
	910024A0

	CODE
base 350	
	910026D0
	910026Y0
	910026A0

	CODE
base 550	
	910028D0
	910028Y0
	910028A0

OPTIONAL

	CODE
ground spike	90013103
ground fixation	90013302



2.0

LED 7W | 220-240VAC | 50-60Hz
COB 3-step | incl. power supply
aluminium powder coated

0.99kg IP65 3-0.3-1 G

3000K | >80 CRI | 300lm | opal glass

	CODE
	726273D4
	726273Y4
	726273A4

ALWAYS USE


	CODE
base 150	
	910024D0
	910024Y0
	910024A0

	CODE
base 350	
	910026D0
	910026Y0
	910026A0

	CODE
base 550	
	910028D0
	910028Y0
	910028A0

OPTIONAL

	CODE
ground spike	90013103
ground fixation	90013302



3.0

LED 7W | 220-240VAC | 50-60Hz
COB 3-step | incl. power supply
aluminium powder coated

0.52kg IP65 3-0.3-1 G

3000K | >80 CRI | 300lm

	CODE
	726373D4
	726373Y4
	726373A4

ALWAYS USE

	CODE
base 150	
	910024D0
	910024Y0
	910024A0

	CODE
base 350	
	910026D0
	910026Y0
	910026A0

	CODE
base 550	
	910028D0
	910028Y0
	910028A0


OPTIONAL

	CODE
ground spike	90013103
ground fixation	90013302





EDGE
OUTDOOR
FLOOR SURFACE



2.0


LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

2.41kg | IP65 | >80 CRI | >480lm

3000K | >80 CRI | 480lm

CODE

721174D4



4.0


LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

3.34kg | IP65 | >80 CRI | >480lm

3000K | >80 CRI | 480lm

CODE

721274D4



6.0


LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

4.45kg | IP65 | >80 CRI | >480lm

3000K | >80 CRI | 480lm

CODE

721474D4



8.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

5.60kg | IP65 | >80 CRI | >480lm

3000K | >80 CRI | 480lm

CODE



721374D4





PALLUZ C

OUTDOOR FLOOR SURFACE



1.0

LED 8W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated

1.30kg IP65 $\approx 0.3^\circ$

3000K | >80 CRI | 665lm | opal glass

CODE

724374D4

ALWAYS USE

CODE

base 230 910033D0

base 600 910036D0

base 800 910038D0

invisible fixation

base 230 910032D0

OPTIONAL

CODE

ground spike for invisible base

230 90013104

ground fixation for base

230 | 600 | 800 90013303

2.0

LED 8W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
aluminium powder coated

1.30kg IP65 $\approx 0.3^\circ$

3000K | >80 CRI | 720lm | clear glass

CODE

724474D4

ALWAYS USE

CODE

base 230 910033D0

base 600 910036D0

base 800 910038D0

invisible fixation

base 230 910032D0

OPTIONAL

CODE

ground spike for invisible base

230 90013104

ground fixation for base

230 | 600 | 800 90013303







SMILE

OUTDOOR FLOOR SURFACE



p. 405 p. 491



1.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

1.15kg IP65 0.3-1

3000K | >80 CRI | 360lm

CODE

703554D4

2.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.95kg IP65 0.3-1

3000K | >80 CRI | 360lm

CODE

703654D4

ALWAYS USE

base with fixation plate

CODE

base 300	910013D0
base 400	910014D0
base 600	910016D0
base 800	910018D0
base 1000	910010D0

base with concrete fixation

CODE

base 300	910073D0
base 400	910074D0
base 600	910076D0
base 800	910078D0
base 1000	910070D0

ALWAYS USE

base with fixation plate

CODE

base 300	910013D0
base 400	910014D0
base 600	910016D0
base 800	910018D0
base 1000	910010D0

base with concrete fixation

CODE



base 300	910073D0
base 400	910074D0
base 600	910076D0
base 800	910078D0
base 1000	910070D0





FIFTY FIFTY

OUTDOOR
FLOOR SURFACE



1.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

1.20kg | IP65 | 0.3-1 | 6

3000K | >80 CRI | 360lm

CODE

756174D4

2.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.98kg | IP65 | 0.3-1 | 6

3000K | >80 CRI | 360lm

CODE

756274D4

ALWAYS USE

base with fixation plate

CODE

base 300	910013D0
base 400	910014D0
base 600	910016D0
base 800	910018D0
base 1000	910010D0

base with concrete fixation

CODE

base 300	910073D0
base 400	910074D0
base 600	910076D0
base 800	910078D0
base 1000	910070D0

ALWAYS USE

base with fixation plate


CODE

base 300	910013D0
base 400	910014D0
base 600	910016D0
base 800	910018D0
base 1000	910010D0

base with concrete fixation

CODE

base 300	910073D0
base 400	910074D0
base 600	910076D0
base 800	910078D0
base 1000	910070D0




back



SWAY

OUTDOOR FLOOR SURFACE



1.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated


1.01kg | IP54 | 140°/140°

140°/140°

3000K | >80 CRI | 520lm

CODE

720174D4



2.0

2xLED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

1.10kg | IP54 | 140°/140°

140°/140°

3000K | >80 CRI | 2x520lm

CODE

720274D4

ALWAYS USE

base with fixation plate

CODE

base 300	910013D0
base 400	910014D0
base 600	910016D0
base 800	910018D0
base 1000	910010D0

base with concrete fixation

CODE

base 300	910073D0
base 400	910074D0
base 600	910076D0
base 800	910078D0
base 1000	910070D0

ALWAYS USE

base with fixation plate

CODE


base 300	910013D0
base 400	910014D0
base 600	910016D0
base 800	910018D0
base 1000	910010D0

base with concrete fixation

CODE

base 300	910073D0
base 400	910074D0
base 600	910076D0
base 800	910078D0
base 1000	910070D0





1.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

1.40kg | IP65 | -0.3°C

3000K | >90 CRI | 520lm

Color	CODE
Grey	716374D5
Black	716374A5

ALWAYS USE

base with fixation plate
base 300

Color	CODE
Grey	910013D0
Black	910013A0

base 400

Grey	910014D0
Black	910014A0

base 600

Grey	910016D0
Black	910016A0

base 800

Grey	910018D0
Black	910018A0

base 1000

Grey	910010D0
Black	910010A0

ALWAYS USE

base with concrete fixation
base 300

Color	CODE
Grey	910073D0
Black	910073A0

base 400

Grey	910074D0
Black	910074A0

base 600


Grey	910076D0
Black	910076A0


base 800

Grey	910078D0
Black	910078A0

base 1000

Grey	910070D0
Black	910070A0





2.0

LED 2xLED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

1.65kg IP65 0.3-1

3000K | >90 CRI | 2x520lm

	CODE
	716474D5
	716474A5

ALWAYS USE

base with fixation plate
base 300

	CODE
	910013D0
	910013A0

base 400

	910014D0
	910014A0

base 600

	910016D0
	910016A0

base 800

	910018D0
	910018A0

base 1000

	910010D0
	910010A0

ALWAYS USE

base with concrete fixation
base 300

	CODE
	910073D0
	910073A0

base 400

	910074D0
	910074A0

base 600

	910076D0
	910076A0

base 800

	910078D0
	910078A0

base 1000


	910070D0
	910070A0

FLOOR PROJECTOR

p. 573 – 579



STIPO
p. 573

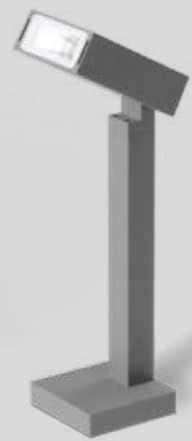


STAKE
p. 575



STAKE FOLD
p. 577




X-BEAM
p. 579


back



STIPO

OUTDOOR FLOOR PROJECTOR



1.0

LED 7W | 220-240VAC | 50/60Hz
COB 3-step | incl. power supply
aluminium powder coated


0.5 kg | IP65 | 135° | 38°

3000K | >80 CRI | 460lm | 2m cable

	CODE
	737157D4
	737157Y4

OPTIONAL

	CODE
ground spike	90013106



2.0

LED 7W | 220-240VAC | 50/60Hz
COB 3-step | incl. power supply
aluminium powder coated


0.49 kg | IP65 | 135° | 38°

3000K | >80 CRI | 460lm | 2m cable

	CODE
	737267D4
	737267Y4

OPTIONAL

	CODE
ground spike	90013106



3.0

LED 7W | 220-240VAC | 50/60Hz
COB 3-step | incl. power supply
aluminium powder coated

0.5 kg | IP65 | 135° | 38°

3000K | >80 CRI | 460lm | 2m cable

	CODE
	737357D4
	737357Y4

ALWAYS USE

	CODE
pole 200 excl. spike	
	910062D0
	910062Y0


	CODE
pole 400 excl. spike	
	910064D0
	910064Y0

	CODE
pole 600 excl. spike	
	910066D0
	910066Y0

	CODE
pole 800 excl. spike	
	910068D0
	910068Y0

OPTIONAL

	CODE
ground spike	90013106



4.0

LED 7W | 220-240VAC | 50/60Hz
COB 3-step | incl. power supply
aluminium powder coated

0.49 kg | IP65 | 135° | 38°

3000K | >80 CRI | 460lm | 2m cable

	CODE
	737467D4
	737467Y4

ALWAYS USE

	CODE
pole 200 excl. spike	
	910062D0
	910062Y0

	CODE
pole 400 excl. spike	
	910064D0
	910064Y0

	CODE
pole 600 excl. spike	
	910066D0
	910066Y0

	CODE
pole 800 excl. spike	
	910068D0
	910068Y0



OPTIONAL

	CODE
ground spike	90013106



STAKE

OUTDOOR FLOOR PROJECTOR



1.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.55kg | IP54 | 0.3° | 0/120°

0/120°

3000K | >80 CRI | 460lm | 1m cable

CODE
727174D4

2.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.50kg | IP54 | 0.3° | 0/120°

0/120°

3000K | >80 CRI | 460lm

CODE
727374D4

OPTIONAL


CODE
ground spike 90013106
snoot 90019004

ALWAYS USE

CODE
base 200 910042D0
base 400 910044D0

OPTIONAL

CODE
ground spike 90013107
snoot 90019004




back



STAKE FOLD

**OUTDOOR
FLOOR PROJECTOR**



1.0

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

0.78kg | IP54 | 0.3m | 0/90°


0/90°

3000K | >80 CRI | 460lm

CODE
727274D4

OPTIONAL

CODE
ground spike 90013107
snoot 90019004





back



PRIVATE RESIDENCE AUSTRIA

X-BEAM

OUTDOOR FLOOR PROJECTOR



1.0

LED 18W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

1.28kg IP65
 0.3-12° 120°

0/110°

3000K | >80 CRI | 1040lm

CODE
700364D4

OPTIONAL

CODE
ground spike 90013115
snoot 90019023

2.0

LED 16W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated

1.28kg IP65
 0.3-12° 9x12°

0/110°

3000K | >80 CRI | 895lm

CODE
700354D4

OPTIONAL


CODE
ground spike 90013115
snoot 90019023



back

**TECH
NICAL**

WELL, WELL ... LOOK WHAT THE CAT DRAGGED IN.




CRI 70+

AREA OF APPLICATION

Offices and shops
for average use

ANWENDBEREBEICH

Büro- und Geschäftsräume mit durchschnittlichen Anwendungen



CRI 80+

AREA OF APPLICATION

Private homes, offices,
and sales areas

ANWENDBEREBEICH

*Privaträume, Büros
und Verkaufsbereiche*




CRI 90+

AREA OF APPLICATION


Museums, galleries, exquisite dining,
and exclusive products in stores

ANWENDBEREBEICH


*Museen, Gallerien, exquisites Essen und
Qualitätsprodukte in Shops*

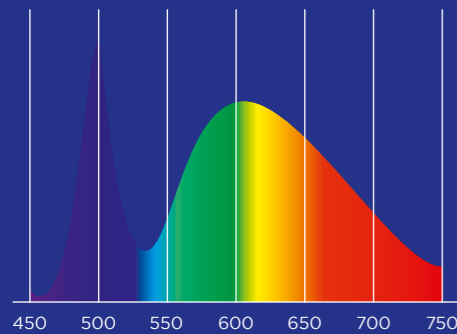

Wavelength (nm) / Wellenlänge (nm)

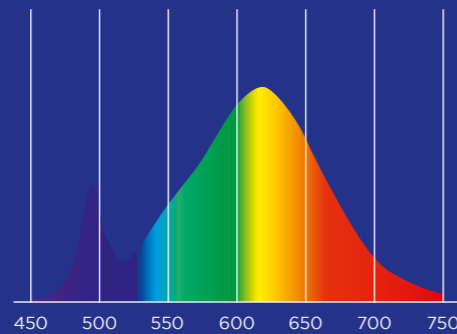

Wavelength (nm) / Wellenlänge (nm)

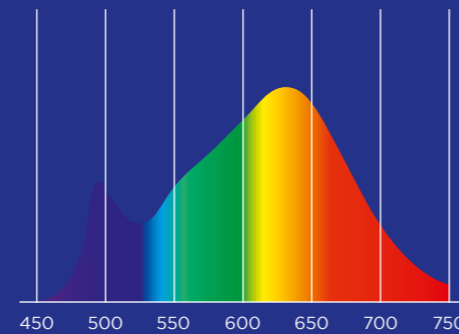


Wavelength (nm) / Wellenlänge (nm)

Why do our LEDs put things in the best light? Because they have a colour rendering index above 80. You're probably thinking "Okay...". But what exactly does that mean? The colour rendering index, the CRI, shows the quality of how colours are perceived under artificial light. The higher this value, and 100 CRI would be possible in theory, the more natural and appealing objects look in your home. So your bright red sofa will finally get the attention it deserves!

Warum unsere LEDs die Dinge ins rechte Licht rücken? Weil sie einen Farbwiedergabewert von mindestens >80 haben. Aha, werden Sie sich jetzt denken. Aber was genau bedeutet das? Nun, der Farbwiedergabewert – oder CRI Index – zeigt an, in welcher Qualität Farben von einer künstlichen Lichtquelle wiedergegeben werden. Je höher also dieser Wert ist – theoretisch wären 100 CRI möglich - desto natürlicher und schöner sehen die Objekte in Ihrem Zuhause aus. So bekommt Ihr knallrotes Sofa endlich die Aufmerksamkeit, die es verdient!


YOU HAD ME AT HELLO.

DIMMING

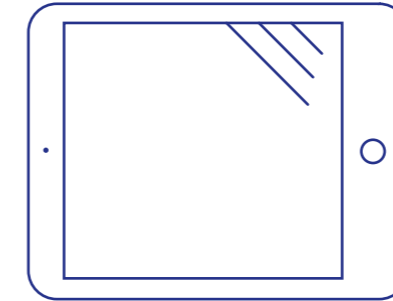

DIM DALI

Digital

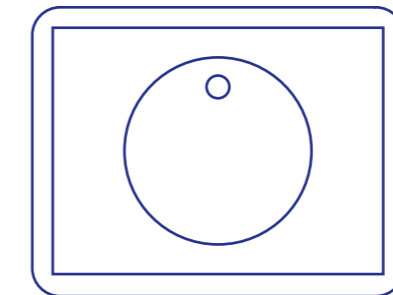

PHASE-CUT DIM

Triac (Analog)

LET THERE BE LIGHT

Would you like to control your light digitally or through the building automation system? No problem! DALI lets you group different lights, dim lights separately, or even program different light ambiance scenarios. Sounds great? It is. Because all you need for this is a five-wire cable and the corresponding software. Then you can control all of your lighting conveniently on your iPad or iPhone. Almost like James Bond.

ES WERDE LICHT


Sie möchten Ihr Licht digital oder über die Gebäudeautomatisierung steuern? Kein Problem. Mit DALI können Sie verschiedene Leuchten gruppieren, Leuchten separat dimmen und sogar verschiedene Lichtstimmungen vorab einstellen. Klingt toll? Ist es auch. Denn für all das brauchen Sie nur ein 5-poliges Kabel und die entsprechende Software. Danach können Sie die gesamte Beleuchtung mit nur einem Klick über das iPad und iPhone steuern. Fast wie James Bond.

WHOA THAT'S BRIGHT ...

You will never hear that phrase in your apartment. Because the analogue phase cut dimmer lets you set the light intensity in every room perfectly. What do you need? Normal wiring with a three-wire cable and a suitable dimmer. A solution that is especially perfect when you are renovating your apartment and don't want to change the wiring. And with the Ambient White Dim, you can even set the colour temperature with a simple phase-cut dimmer. Nothing could be easier.

UI, DAS BLENDET ...

Diesen Satz werden Sie in Ihrer Wohnung garantiert nie hören. Denn mit dem analogen Phasenabschnittsdimmer lässt sich die Lichtintensität in jedem Raum perfekt einstellen. Was Sie dazu brauchen? Eine normale Verkabelung mit einem 3-poligen Kabel und einen passenden Dimmer. Eine Lösung, die vor allem dann perfekt ist, wenn Sie gerade Ihre Wohnung renovieren und die Verkabelung nicht ändern wollen. Und mit dem Ambient White Dim können Sie mit einem einfachen Phasenabschnittsdimmer sogar die Lichtfarbe einstellen. Bequemer geht's nicht.

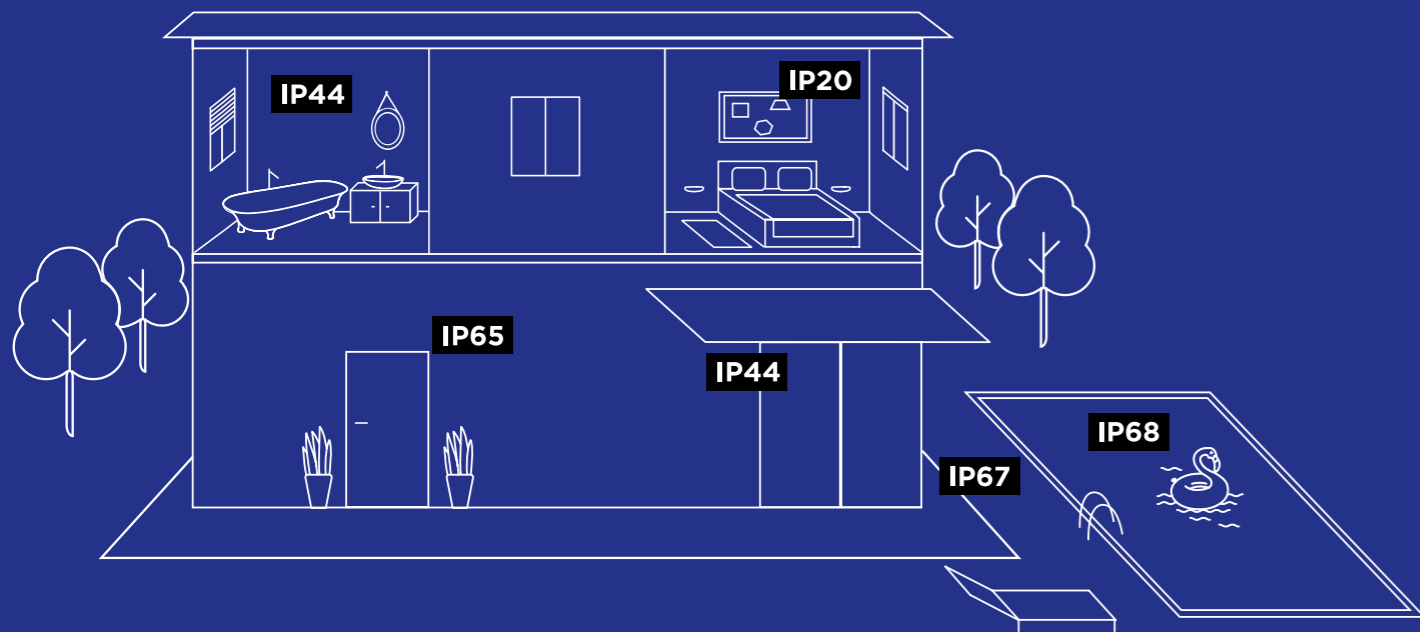

GENERAL REMARK

We advise to have the lighting devices installed only by a qualified electrician. In case the area is cleaned with water jets, then a minimum of IP65 is required.

ALLGEMEINER HINWEIS

Wir empfehlen, die Leuchtkörper nur von einem Elektrofachmann installieren zu lassen. Bei Wasserstrahlreinigung der Umgebung mindestens Wasserschutzklasse IP65 wählen.

SAFETY FIRST

IP RATING

FIRST DIGIT

Protection against dust

Schutz gegen Festkörper



No protection
Kein Schutz



Protected against solid objects greater than 50 mm Ø
Geschützt vor festen Gegenständen über 50 mm Ø



Protected against solid objects greater 12 mm Ø
Geschützt vor festen Gegenständen über 12 mm Ø



Protected against solid objects over 2.5mm Ø
Geschützt vor festen Gegenständen über 2,5mm Ø



Protected against solid objects greater than 1.0 mm Ø
Geschützt vor festen Gegenständen über 1,0 mm Ø



Dust protected
Staubgeschützt



Dust tight
Staubdicht

SECOND DIGIT

Protection against water

Schutz gegen Flüssigkeiten




No protection
Kein Wasserschutz



Protected against vertically dripping water
Geschützt vor senkrecht fallendem Tropfwasser



Protected against dripping water (tilted up to 15°)
Geschützt vor schräg fallendem Tropfwasser (bis 15°)



Protected against spray water
Geschützt vor Sprühwasser



Protected against splashing water from all directions
Geschützt vor Spritzwasser aus allen Richtungen



Protected against water jets
Geschützt vor Strahlwasser



Protected against strong water jets
Geschützt vor starkem Strahlwasser



Protected against penetrating water during short-term immersion
Geschützt vor eindringendem Wasser beim kurzzeitigen Eintauchen







Protected against submersion
Geschützt vor eindringendem Wasser beim Untertauchen

DIM THE LIGHTS

IT CAN BE SO EASY

Never have your words and your touch been any more illuminating than with our new collection of ZigBee-compatible luminaires. All it takes to adjust and dim your lights is a simple swipe on your smartphone screen or a command to your voice-controlled device. Sounds easy? It is: Choose your favourite ZigBee products from our collection, connect them to your smart home system such as Amazon Echo or homee and you're good to go. Whether you want bright lights for breakfast, candle light atmosphere for dinner or anything in between – just kick up your feet and touch or talk to set your desired mood.

Noch nie war die Erleuchtung so einfach wie mit unserer ZigBee-kompatiblen Leuchtenkollektion – ein einfacher Klick oder eine Aufforderung an dein sprachgesteuertes Gerät genügen. Klingt einfach? Ist es auch: Lieblingsprodukte aus unserer ZigBee Kollektion auswählen, mit dem Smart-Home-System wie Amazon Echo oder homee verbinden und los geht's. Ob ein hell erleuchtetes Frühstück, schummrige Atmosphäre für ein Candle-Light-Dinner oder für alles dazwischen – zurücklehnen und die gewünschte Lichtstimmung genießen.

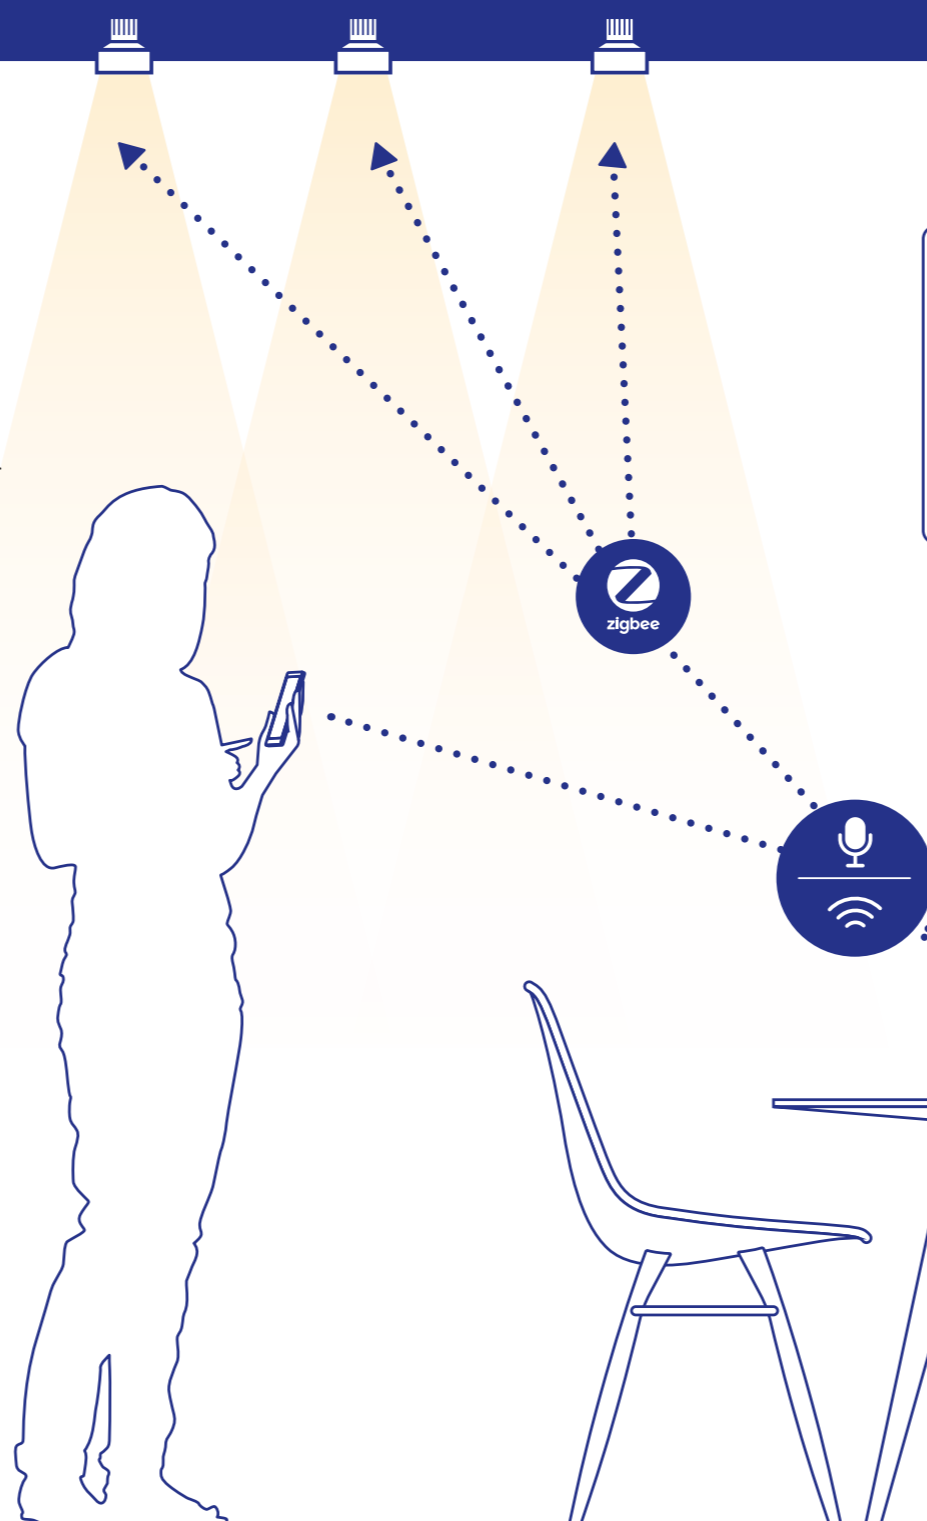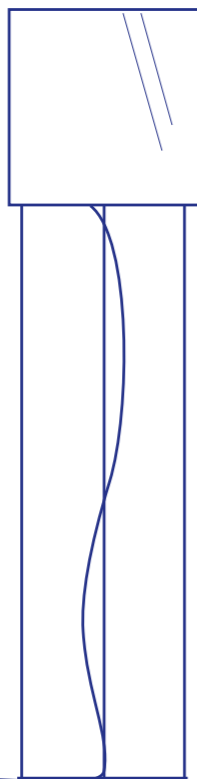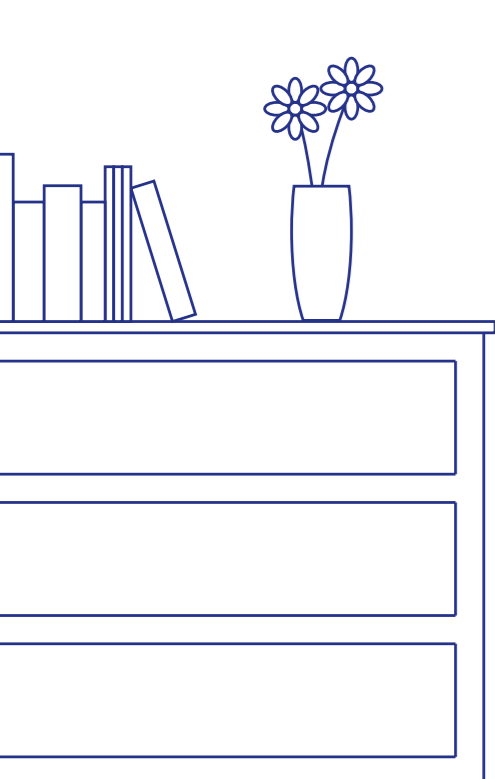

ZIGBEE LED 2700K
LED 10W | 2700K | 220-240VAC
50-60Hz | +80 CRI | 720lm
⌵ 36°

CODE
901268W2
901268B2



FIND ALL COMPATIBLE PRODUCTS
weverducre.com/smartlighting

POWER SUPPLIES

ACCESSORIES

350/500/700mA 20W

Driver 220-240VAC | 50-60Hz
20W | 350/500/700mA with output
selection | 350mA 25-50V | 500mA
20V-40V | 700mA 14V-28,5V
L/W/H 101.5x51x29.5

CE 0.09kg  SELV  IP20

DEEP 7/10W (2x)
RON 7/10W (2x) | **RONY** 7/10W (2x)

CODE	CODE
90218601	90213201

350mA 4W

Driver 100-240VAC | 50-60Hz
4W | 350mA | 4-12V
L/W/H 43x42x23

CE 0.05kg   TÜV IP20

350mA 10W 1-10V DIM

Driver 220-240VAC | 50-60Hz | 10W
350mA | 14-28V | 1-10V dim
L/W/H 101,5x51x29,5

CE 0.09kg  SELV  IP20

DEEP 7W | **RON** 7W | **RONY** 7W
STRANGE ceiling 7W

CODE	CODE
90223401	90223401

350mA 15W DIM

Driver 220-240VAC | 50-60Hz | 15W
350mA | 21-42V | phase-cut dim
L/W/H 101,5x51x29,5





CE 0.09kg  SELV  IP20

DEEP PETIT (2x) | **DEEP** 7W (1x)
PLANO PETIT (2x) | **PLANO** 7W (1x)

CODE	CODE
90223401	90223503

350mA 10W DALI


Driver 220-240VAC | 50-60Hz | 5-100%
10W | 350mA | 2.5-26V | DALI dim
L/W/H 124x31x21

CE 0.08kg    EMC SELV  IP20

LED MODULES HO (1x) | 73240577
73240682 | 73240542 | 73240681

CODE	CODE
90243401	90243401

350mA 18W DALI

Driver 220-240VAC | 50-60Hz | 1-100%
18W | preset at 350mA | 8-50V | touch
dim | DALI
L/W/H 119x53x30
CE 0.08kg  SELV  IP20

LED MODULES HO (1x) | 73240577
73240682 | 73240542 | 73240681

CODE	CODE
90253601	90253601

500mA 10W 1-10V DIM

Driver 220-240VAC | 50-60Hz
10W | 500mA | 11-20V | 1-10V dim
L/W/H 100x43x22.5

CE 0.06kg   IP20

DEEP 10W | **RON** 10W | **RONY** 10W
LUNA 10W | **STRANGE** 10W
PLANO 10W

CODE	CODE
90234401	90234401

500mA 18W DALI

Driver 220-240VAC | 50-60Hz | 10-100%
18W | preset at 500mA | 7.5-35VDC at
500mA | touch dim | DALI
L/W/H 119x53x30

CE 0.08kg  SELV  IP20 

included in **CORO SURFACE** 1.4
DEEP 10W (1x) | **RON** 10W (1x)
RONY 10W (1x)

CODE	CODE
90254602	90254602

500mA 10W

Driver 220-240VAC | 50Hz
10W | 500mA | 11-20V
L/W/H 101.5x51x29.2

CE 0.116kg  SELV  IP20

DEEP 10W | **RON** 10W | **RONY** 10W
LUNA 10W | **STRANGE** ceiling 10W
PLANO 10W

CODE	CODE
90214405	90214405

500mA 21W DIM

Driver 220-240VAC | 50-60Hz
21W | 500mA | 16-42V
L/W/H 110x52x22 | phase-cut dim

CE 0.11kg  SELV  IP20

included in **CORO SURFACE** 1.4

CODE	CODE
90224702	90224702

500mA 10W DALI

Driver 220-240VAC | 50-60Hz | 1-100%
10W | 350mA | 2.5-20V | DALI
L/W/H 124x31x21

CE 0.08kg    EMC SELV  IP20

DEEP 10W | **RON** 10W | **RONY** 10W
STRANGE ceiling 10W

CODE	CODE
90244401	90244401

500mA 21W DIM

Driver 220-240VAC | 50-60Hz | 5-100%
21W | 500mA | 28-42V | phase-cut dim
L/W/H 101.5x51x29.5

CE 0.09kg  SELV  IP20

DEEP 10W (2x) | **RON** 10W (2x)
RONY 10W (2x)

CODE	CODE
90224701	90224701

500mA 6W

Driver 90-264VAC | 50-60Hz
6W | 500mA | 3-12V
L/W/H 64x35x21

CE 0.04kg   EMC IP20

THEMIS 5W | **STRANGE** wall 5W
LITO 3W | **SMILE IN** 6W

CODE	CODE
90214201	90214201

500mA 15W DIM

Driver 220-240VAC | 50-60Hz | 5-100%
15W | 500mA | 13.5-30V
L/W/H 102x51x30 | phase-cut dim

CE 0.08kg  SELV  IP20

DEEP 10W | **RON** 10W | **RONY** 10W
STRANGE ceiling 10W

CODE	CODE
90224501	90224501

500mA 25W DALI

Driver 220-240VAC | 50-60Hz | 1-100%
25W | 350-1050mA | preset at 500mA
20-50V | DSI | switch dim | DALI
L/W/H 130x43x30

CE 0.17kg  SELV  IP20

DEEP 10W (2x) | **RON** 10W (2x)
RONY 10W (2x) **PLANO** 10W (2x)
STRANGE CEILING 10W (2x)

CODE	CODE
90254603	90254603

350mA 6W

Driver 90-264VAC | 50-60Hz
6W | 350mA | 3-22V
L/W/H 64x35x21



CE 0.04kg   IP20

LITO 2W | **STRIPE** 1W | **EYE** 1W
SMILE IN 4W

CODE	CODE
90213202	90213202

350mA 15W DIM

Driver 220-240VAC | 50Hz | 15W
350mA | 28-42V | phase-cut dim
L/W/H 101,5x51x29,5

CE 0.11kg  SELV  IP20

LED MODULES HO (1x) | 73240577 |
73240682 | 73240542 | 73240681

CODE	CODE
90228501	90228501

350mA 10W

Driver 220-240VAC | 50-60Hz | 10W
350mA | 12-28V | phase-cut dim
L/W/H 102x38x21



CE 0.09kg  SELV  IP20

DEEP PETIT (1x) | **DEEP** 7W (1x)
PLANO PETIT (1x) | **PLANO** 7W (1x)

CODE	CODE
90223402	90223402

350mA 30W

Driver 220-240VAC | 50-60Hz
30W | 350mA | 43-86V
L/W/H 127x43x30

CE 0.15kg  SELV  IP20

DEEP PETIT (3x) | **PLANO**
PETIT (3x) | **PLANO** PETIT 3.0 |
STRANGE PETIT (3x) | **STRANGE**
PETIT 3.0

CODE	CODE
90213701	90213701

POWER SUPPLIES

ACCESSORIES

700mA 6W

Driver 90-264VAC | 50-60Hz
6W | 700mA | 3-8.4V
L/W/H 64x35x21

CE 0.04kg   IP20

EYE 2W | **STRIPE 2W** | **THEMIS 8W**
STRANGE wall 2W

CODE

90215203

700mA 3W IP66

Driver 90-264VAC | 50-60Hz
3W | 700mA | 3-6V
L/W/H 52x30x23

CE 0.09kg   EMC IP66

ORIS 0.7 2W

CODE

90215101

700mA 6W IP67

Driver 90-295VAC | 47-63Hz
7W | 700mA | 3-10,5V
L/W/H 57x41x24

CE 0.07kg    IP67

ORIS 1.3 4W
ORIS 2.0 4W

CODE

90215301

700mA 12W IP67

Driver 120-240VAC | 50-60Hz
12W | 700mA | 2-18V
L/W/H 81x40x23

CE 0.28kg  SELV IP67

CODE

90215402

700mA 18W IP67 DIM

Driver 120-240VAC | 50-60Hz
18W | 700mA | 4-26V | dim trailing edge
L/W/H 133x40x30

CE 0.28kg  SELV   IP67

CODE

90225602

700mA 10W DALI

Driver 220-240VAC | 50-60Hz | 1-100%
10W | 350mA | 2.5-14V | DALI
L/W/H 124x31x21

CE 0.08kg EL   EMC SELV  IP20

CODE

90245401

700mA 14W DIM

Driver 220-240VAC | 50-60Hz | 5-100%
14W | 700mA | 10-20V | phase-cut dim
L/W/H 102x51x30

CE 0.07kg  SELV  IP20

included in **CORO RECESSED 1.3**,
1.6 | **CORY RECESSED 1.6**, 2.1

CODE

90225501

700mA 20W DIM

Driver 220-240VAC | 50-60Hz
20W | 700mA | 16-28V
L/W/H 110x52x22 | phase-cut dim

CE 0.11kg  SELV  IP20

included in **CORO SURFACE 1.6**

CODE

90225603

700mA 25W DIM

Driver 220-240VAC | 50-60Hz
25W | 700mA | 17-35V
L/W/H 145x51x30 | phase-cut dim

CE 0.12kg  SELV  IP20


included in **CORO RECESSED 2.4**,
2.6 | **CORO SURFACE 2.0**, 2.5, 2.6,
3.4

CODE

90225701

TRANSFORMER 12V/105W

230-240VAC | 50-60Hz | 35-105VA
105W | 12V | leading + trailing edge
L/W/H 108x52x33

CE 0.12kg  IP20

CODE

90221905

LED DRIVER 12V/10W

220-240VAC | 50-60Hz | 3-10VA
10W | 12V | leading + trailing edge
L/W/H 102x51x30

CE 0.1kg  IP20

CODE

90221401

LED DRIVER 12V/25W

220-240VAC | 50-60Hz | 8-25VA
25W | 12V | leading + trailing edge
L/W/H 145x51x29,5

CE 0.1kg  IP20

CODE

90221701

TRANSFORMER 12V/70W

230-240VAC | 50-60Hz | 20-70VA
70W | 12V | leading + trailing edge
L/W/H 108x52x33

CE 0.12kg  IP20

CODE

90221904

350mA 3W IP66

Driver 90-264VAC | 50-60Hz
3W | 350mA | 3-15V
L/W/H 52x30x23

CE 0.05kg   EMC IP66

CODE

90213101

350mA 7W IP67

Driver 90-295VAC | 47-63Hz
7W | 350mA | 10-20V
L/W/H 57x41x24


CE 0.05kg  SELV  IP67

CODE

90213301

500mA 7W IP67

Driver 90-295VAC | 47-63Hz
7W | 500mA | 5-14.5V
L/W/H 57x41x24

CE 0.15kg  SELV IP67

CODE

90214301

500mA 12W IP67

Driver 120-240VAC | 50-60Hz
12W | 500mA | 2-26V
L/W/H 81x40x23

CE 0.15kg  SELV IP67

CODE

90214402

DIMMER FOR SWITCH

DIM leading /trailing edge
230V | max. 200W LED
L/W/H 48x17,5x46

CE IP30




CODE

90019017

DIMMER DIN RAIL

DIM leading /trailing edge
230V | max. 200W LED
L/W/H 17x55x90

CE IP30



CODE

90019018

CONNECTION BOX 3P

incl. strain relief | 3 pole push
connector
L/W/H 75x35x25




CODE

90059119

CONNECTION BOX 5P

incl. strain relief | 5 pole push
connector
L/W/H 70x60x30



CODE

90059120

LED LAMPS

ACCESSORIES

PAR16 LED 2700K

PAR16 LED | GU10 | 175-250VAC
50-60Hz | 2700K | 7W | >80 CRI
480lm | phase-cut dim

CE 0.06kg IP20 Δ 45°



CODE

901228W2

PAR16 LED 2700K

PAR16 LED | GU10 | 175-250VAC
50-60Hz | 2700K | 7W | >90 CRI
360lm | phase-cut dim

CE 0.06kg IP20 Δ 45°



CODE

901228B3

PAR16 LED 2700K

PAR16 LED | GU10 | 220-240VAC
50-60Hz | 2700K | 4.6W | >80 CRI
350lm | phase-cut dim

CE 0.06kg IP20 Δ 36°



CODE

905228S2

QT14 LED 3000K

QT14 LED | G9 | 175-250VAC
50-60Hz | 3000K | 3W | >80 CRI | 300lm

CE 0.05kg IP20



CODE

9019G703

PAR16 LED 3000K

PAR16 LED | GU10 | 175-250VAC
50-60Hz | 3000K | 7W | >90 CRI
360lm | phase-cut dim

CE 0.06kg IP20 Δ 45°



CODE

901228B5

PAR16 LED 3000K

PAR16 LED | GU10 | 220-240VAC
50-60Hz | 3000K | 4.6W | >80 CRI
350lm | phase-cut dim

CE 0.06kg IP20 Δ 36°



CODE

905228S4

PAR16 LED 3000K

PAR16 LED | GU10 | 175-250VAC
50-60Hz | 3000K | 7W | >80 CRI
465lm | phase-cut dim

CE 0.06kg IP20 Δ 45°



CODE

901228W4

PAR16 LED 4000K

PAR16 LED | GU10 | 175-250VAC
50-60Hz | 4000K | 7W | >80 CRI
450lm | phase-cut dim

CE 0.06kg IP20 Δ 45°




CODE

901228W6

PAR16 FLAT HEAD

PAR16 | GU10 | 220-240VAC
50-60Hz

CE 0.06kg IP20




CODE

90059125

LED AC MODULE 2700K

220-240V | COB 3-step | phase-cut
dim | >90 CRI | 8W | 2700K | 480lm
compatibility on request

CE \diamond 0.08kg IP20 Δ 36°



CODE


901268W3

901268B3

LED AC MODULE 3000K

220-240V | COB 3-step | phase-cut
dim | >90 CRI | 8W | 3000K | 500lm
compatibility on request

CE \diamond 0.08kg IP20 Δ 36°



CODE

901268W5

901268B5

PAR16 LED AMBIENT

PAR16 LED | GU10 | 220-240VAC
50-60Hz | 1800-2850K | 7W | 380lm
ambient white phase-cut dim

CE 0.06kg IP20 Δ 40°



CODE

901229S9

SPRING CLIP

Alternative lamp fixation | push-in
system for \varnothing 50 lamp rings

MR16 | LED | PAR16 | max. 12W

DEEP ADJUST | DEEP ASYM

DEEP 2.0 | PYRAMID | PLANO

STRANGE | SPINEO | NOP

SOLID

	CODE
	73240651
	73240941
	73240940
	73240942
	73240652

LED MODULE HO 2700K

LED Module | 350mA | 35Vf
2700K | 12W | >90 CRI | 1050lm
compatibility on request

CE \diamond 0.06kg IP20 Δ 26°



CODE

73240577

73240682

LED MODULE HO 3000K

LED Module | 350mA | 35Vf
3000K | 12W | >90 CRI | 1100lm
compatibility on request

CE \diamond 0.06kg IP20 Δ 26°



CODE

73240542


73240681

DECO LAMPS

ACCESSORIES

G95 LAMP 2200K

G95 CARBON FILAMENT | E27
220-240VAC | 2200K | 15W | 50lm
phase-cut dim
WIRO 6.1, 6.5



CODE
9003E102

ST64 LAMP 2200K

ST64 CARBON FILAMENT | E27
220-240VAC | 2200K | 15W | 50lm
phase-cut dim
WIRO 1.8, 3.8, 6.1, 6.5



CODE
9003E105

QA60 LAMP 2200K

QA60 CARBON FILAMENT | E27
220-240VAC | 2200K | 15W | 50lm
phase-cut dim
WIRO 1.8, 2.0, 3.8, 6.1, 6.5 | **CONE**
GLOBE 1.0, 2.0, 3.0



CODE
9003E124

QA60 LED 2200K

QA60 LED FILAMENT | E27
220-240VAC | 50-60Hz | 2200K | 6W
>80 CRI | 450lm | phase-cut dim
gold tinted glass
WIRO 1.8, 2.0, 3.8, 6.1, 6.5 | **CONE**
GLOBE 1.0, 2.0, 3.0 | **J.J.W.** | **BISHOP**



CODE
9003E109

QA60 LED 2700K OPAL MIRROR

QA60 LED FILAMENT | E27
220-240VAC | 50-60Hz | 2700K | 6W
>90 CRI | 400lm | phase-cut dim
MIRRO



CODE
gold mirror 9003E139
silver mirror 9003E140

QA60 LED 2700K DIM

QA60 LED FILAMENT | E27
220-240VAC | 50-60Hz | 2700K | 6W
>85 CRI | 500lm | phase-cut dim
WIRO 1.8, 2.0, 3.8, 6.1, 6.5 | **CONE**
GLOBE 1.0, 2.0, 3.0 | **ROCK** | **J.J.W.**
BISHOP



CODE
9003E138

QA60 LED 2700K OPAL

QA60 LED | E27 | 220-240VAC
50-60Hz | 2700K | 14.5W | >80 CRI
1520lm | phase-cut dim
matt
ROCK | **REVER** Suspended | **BISHOP**



CODE
9003E131

QT14 LED 2700K

QT14 LED | G9 | 220-240VAC | 50-60Hz
2700K | 3W | >80 CRI | 170lm
phase-cut dim | opal
DRO

CE 0.05kg IP20



CODE
9019G706

QT14 LED 2700K

QT14 LED | G9 | 220-240VAC
50-60Hz | 2700K | 3W | >80 CRI | 200lm
phase-cut dim
DRO

CE 0.05kg IP20



CODE
9019G705

QT14 LED 3000K

QT14 LED | G9 | 175-250VAC | 50-60Hz
3000K | 3W | >80 CRI | 190lm
phase-cut dim | opal
DRO

CE 0.05kg IP20




CODE
9019G707

QT14 LED 3000K

QT14 LED | G9 | 175-250VAC
50-60Hz | 3000K | 3W | >80 CRI | 300lm

DRO

CE 0.05kg IP20



CODE
9019G703

QA60 LED 2700K OPAL


QA60 LED | E27 | 220-240VAC
50-60Hz | 2800K | 9.5W | >80 CRI
810lm | phase-cut dim
matt
ROCK | **REVER** TABLE | **FLOOR**
BISHOP



CODE
9003E148

G95 LED 2200K


G95 LED FILAMENT | E27
220-240VAC | 50-60Hz | 2200K | 6W
>95 CRI | 450lm | phase-cut dim
gold tinted glass
WIRO 6.1, 6.5 | **ROCK** | **BISHOP**



CODE
9003E111

G95 LED 2700K OPAL

G95 LED | E27 | 220-240VAC | 50-60Hz
2700K | 12W | >80 CRI | 1050lm
phase-cut dim
WIRO 6.1, 6.5 | **ROCK** | **BISHOP**



CODE
9003E137

G95 LED 2700K MIRROR

G95 LED FILAMENT | E27
220-240VAC | 50-60Hz | 2700K | 6W
>90 CRI | 500lm | phase-cut dim
MIRRO



CODE
gold mirror 9003E142
silver mirror 9003E149

TCR LED 3000K

TCR LED | GX53 | 175-264VAC
50-60Hz | 3000K | 6W | >80 CRI | 450lm

CE 0.12kg IP20



CODE
901348W4

G125 LED 2200K

G125 LED FILAMENT | E27
220-240VAC | 50-60Hz | 2200K | 6W
>95 CRI | 450lm | gold tinted glass
WIRO 6.1, 6.5 | **ROCK** | **BISHOP**



CODE
9003E112

C35 LED 2700K OPAL

C35 LED | E14 | 220-240VAC | 50-60Hz
2700K | 6W | >80 CRI | 470lm
phase-cut dim | matt
REVER WALL



CODE
9003C101

ST64 LED 2200K DIM

ST64 LED FILAMENT | E27
220-240VAC | 50-60Hz | 2200K | 6W
>95 CRI | 450lm | phase-cut dim
gold tinted glass
WIRO 1.8, 3.8, 6.1, 6.5 | **BISHOP**



CODE
9003E110

DECO LAMPS

ACCESSORIES

T30-225 LED 2200K

T30-225 LED FILAMENT | E27
220-240VAC | 50-60Hz | 2200K | 6W
>95 CRI | 450lm | phase-cut dim
gold tinted glass

WIRO 3.8, 6.1, 6.5 | Wall | Table | Floor
CONE | **DIAMOND** | **INDUSTRY**
GLOBE 1.0, 2.0, 4.0, 5.0, 6.0 | **ROCK**



CODE
9003E129

T30-300 LED 2700K

T30-300 LED FILAMENT | E27
220-240VAC | 50-60Hz | 2700K | 8W
>95 CRI | 550lm | phase-cut dim

WIRO 3.8, 6.1, 6.5 | **DIAMOND**
INDUSTRY | **GLOBE** 1.0, 2.0, 5.0, 6.0
Table 2.0 | Floor 1.0, 2.0 | **ROCK**



CODE
9003E135

T30-300 LED 2200K

T30-300 LED FILAMENT | E27
220-240VAC | 50-60Hz | 2200K | 8W
>95 CRI | 550lm | phase-cut dim
gold tinted glass

WIRO 3.8, 6.1, 6.5 | **DIAMOND**
INDUSTRY | **GLOBE** 1.0, 2.0, 5.0, 6.0
Table 2.0 | Floor 1.0, 2.0 | **ROCK**



CODE
9003E130

T30-225 LED 2700K DIM

T30-225 LED FILAMENT | E27
220-240VAC | 50-60Hz | 2700K | 6W
>90 CRI | 500lm | phase-cut dim
gold tinted glass

WIRO 1.8, 3.8, 6.1, 6.5 | Wall | Table | Floor
CONE | **DIAMOND** | **INDUSTRY**
GLOBE 1.0, 2.0, 4.0, 5.0, 6.0 | **ROCK**



CODE
9003E136

T32-180 LAMP 2200K

T32-180 CARBON FILAMENT | E27
220-240VAC | 2200K | 15W | 50lm
phase-cut dim

WIRO 1.8, 3.8, 6.1, 6.5 | **WIRO** Wall
Table | Floor | **CONE** | **DIAMOND**
GLOBE | **INDUSTRY** | **ROCK**



CODE
9003E106

T32-300 LAMP 2200K

T32-300 CARBON FILAMENT | E27
220-240VAC | 2200K | 15W | 50lm
phase-cut dim


WIRO 3.8, 6.1, 6.5 | **INDUSTRY**
DIAMOND | **GLOBE** 1.0, 2.0, 5.0, 6.0
GLOBE Floor 1.0, 2.0 | **GLOBE** Table
2.0 | **ROCK**



CODE
9003E127

PLANO 111


plasterkit



CODE
90017106

THEMIS 1.7


plasterkit



CODE
90017111

THEMIS 2.7


plasterkit



CODE
90017112

THEMIS 5.0

plasterkit



CODE
90017115

PLASTERKITS

ACCESSORIES

LUNA 1.0 ROUND

plasterkit
not compatible with LUNA round 1.0
LED HV



CODE
90017101

LUNA 2.0 SQUARE

plasterkit
not compatible with LUNA square 1.0
LED HV



CODE
90017102

LITO


plasterkit



CODE
90017119

MIRBI 2.0

plasterkit



CODE
90017124

PLANO 1.0

plasterkit



CODE
90017104

PLANO 2.0

plasterkit




CODE
90017105

PLASTERKITS

ACCESSORIES


STRANGE 1.0 | SNEAK TRIMLESS 1.0
aluminium plasterkit

▮ 86x86 ▮ 4-25



STRANGE 1.0 | SNEAK TRIMLESS 1.0
plastic plasterkit

▮ 86x86 ▮ 10 or 13




CODE
90017120

CODE
90017122
90017116


STRANGE PETIT 1.0
aluminium plasterkit

▮ 64x64 ▮ 7-17



STRANGE PETIT 1.0
plastic plasterkit

▮ 65x65 ▮ 10 or 13




CODE
90017202

CODE
90017200
90017201


STRANGE 1.0 111
plasterkit

▮ 153x153 ▮ 4-25



STRANGE 2.0 | SNEAK TRIMLESS 2.0
aluminium plasterkit

▮ 156x86 ▮ 4-25




CODE
90017118

CODE
90017121

STRANGE 2.0 | SNEAK TRIMLESS 2.0
plastic plasterkit


▮ 156x86 ▮ 10 or 13



CODE
90017123
90017117

ORIS 0.7
plasterkit + recessed housing


▮ 191x58 ▮ 60



CODE
90012039


STRANGE PETIT 2.0
aluminium plasterkit

▮ 64x115 ▮ 7-17



STRANGE PETIT 2.0
plastic plasterkit

▮ 67x118 ▮ 10 or 13




CODE
90017205

CODE
90017203
90017204


STRANGE PETIT 3.0
aluminium plasterkit

▮ 64x167 ▮ 7-17



STRANGE PETIT 3.0
plastic plasterkit

▮ 68x168 ▮ 10 or 13




CODE
90017208

CODE
90017206
90017207

ORIS 1.3
plasterkit + recessed housing


▮ 122x122 ▮ 60



CODE
90012041

ORIS 2.0
plasterkit + recessed housing

▮ 123x191 ▮ 60



CODE
90012043

STRIPE 0.4 | 0.7
plasterkit + recessed housing


▮ 75x75 ▮ 55



CODE
90012037

STRIPE 2.2
plasterkit + recessed housing

▮ 251x76 ▮ 55



CODE
90012038


RECESSED HOUSING

ACCESSORIES

HIDE 1 LAMP

recessed housing + plasterkit
aluminium | steel powder coated


⊞ 115x115 ⊞ 125



HIDE 2 LAMPS

recessed housing + plasterkit
aluminium | steel powder coated


⊞ 212x115 ⊞ 125



HIDE 3 LAMPS

recessed housing + plasterkit
aluminium | steel powder coated


⊞ 306x115 ⊞ 125



HIDE 4 LAMPS

recessed housing + plasterkit
aluminium | steel powder coated

⊞ 402x115 ⊞ 125



	CODE
	90012009
	90012017

	CODE
	90012010
	90012018


	CODE
	90012011
	90012019

	CODE
	90012012
	90012020

MIRBI 2.0

recessed housing


⊞ 235x235 ⊞ 50



LUNA

recessed housing
always use in combination with
plasterkit | not compatible with
LUNA round/square 1.0 LED HV

⊞ 130x160 ⊞ 122



SMILE IN

recessed housing


⊞ 91 ⊞ 55



MAP 0.6 | CHART 0.6

recessed housing


⊞ 137 ⊞ 110



MAP 0.9 | CHART 0.9

recessed housing


⊞ 137 ⊞ 130



MAP 1.2 | CHART 1.2 MAP ASYM 1.2 | CHART ASYM 1.2

recessed housing


⊞ 190 ⊞ 158



MAP 1.6 | CHART 1.6 MAP ASYM 1.6 | CHART ASYM 1.6

recessed housing

⊞ 220 ⊞ 184



	CODE
	90012045

	CODE
	90012026

	CODE
	90012030

	CODE
	90012201

	CODE
	90012202


	CODE
	90012203

	CODE
	90012204

LITO

recessed housing
always use in combination with
plasterkit


⊞ 122x90 ⊞ 45



THEMIS 1.7

recessed housing
always use in combination with
plasterkit


⊞ 272x160 ⊞ 85



THEMIS 2.7

recessed housing
always use in combination with
plasterkit

⊞ 372x160 ⊞ 85



THEMIS 5.0

recessed housing
always use in combination with
plasterkit

⊞ 572x160 ⊞ 85



EYE

recessed housing


⊞ 55 ⊞ 40



ORIS 0.7

concrete housing


⊞ 192x58 ⊞ 60



ORIS 1.3

concrete housing


⊞ 121x121 ⊞ 60



ORIS 2.0

concrete housing

⊞ 123x191 ⊞ 60



	CODE
	90012027

	CODE
	90012032

	CODE
	90012033

	CODE
	90012036

	CODE
	90012025

	CODE
	90012044

	CODE
	90012040

	CODE
	90012042

for more support and planning of 1-phase track systems,
please check our FAQ section on weverducre.com

1-PHASE TRACK


for more support and planning of 1-phase track systems,
please check our FAQ section on weverducre.com

1-PHASE TRACK

ACCESSORIES

TRACK PROFILE 1M


recessed



	CODE
	90014118
	90014119

TRACK PROFILE 2M


recessed



	CODE
	90014120
	90014121

TRACK PROFILE 3M


recessed



	CODE
	90014122
	90014123

TRACK PROFILE 1M


surface



	CODE
	90014001
	90014007

TRACK PROFILE 2M


surface



	CODE
	90014002
	90014008

TRACK PROFILE 3M


surface



	CODE
	90014003
	90014009

COVERPLATE I/L/T/X

only use with recessed tracks



	CODE
	90014126
	90014127

COVERPLATE END FEEDS


only use with recessed tracks



	CODE
	90014124
	90014125

END FEED


left



	CODE
	90014018
	90014019

END FEED

right



	CODE
	90014020
	90014021

CONNECTOR


straight



	CODE
	90014022
	90014023

L-CONNECTOR LEFT


can be used as feed



	CODE
	90014024
	90014025

L-CONNECTOR RIGHT

can be used as feed



	CODE
	90014026
	90014027


for more support and planning of 1-phase track systems,
please check our FAQ section on weverducre.com

1-PHASE TRACK

ACCESSORIES

MIDDLE FEED

straight



CODE

90014036

90014037

END CAP LEFT/RIGHT



CODE

90014028

90014029

TRACK ADAPTER

no space for driver
for suspension power cable
incl. strain relief



CODE

90014044

90014043

T-CONNECTOR

can be used as feed



CODE

90014010

90014011

T-CONNECTOR

can be used as feed



CODE

90014012

90014013

T-CONNECTOR

can be used as feed



CODE

90014014

90014015

T-CONNECTOR

can be used as feed



CODE

90014016

90014017

X-CONNECTOR

can be used as feed



CODE

90014049

90014050

FLEXIBLE CORNER



CODE

90014042

90014041

HEIGHT ADJ. SLEEVE



CODE

90014040

SUSPENSION CLAMP



CODE

90014038


for more support and planning of 3-phase track systems,
please check our FAQ section on weverducre.com

3-PHASE TRACK

ACCESSORIES

TRACK PROFILE 1M

surface




CODE

90014060

90014061

TRACK PROFILE 2M

surface




CODE

90014062

90014063

TRACK PROFILE 3M

surface



CODE

90014064

90014065

SUSPENSION CLAMP

fast mounting



CODE

90014130

90014128

HEIGHT ADJ. SLEEVE



CODE

90014040

WIRE SUSPENSION

incl. ceiling fixation bracket | suitable
also for 1-phase track



1.5m

CODE

90014047

90014039

3.0m

CODE

90014053

90014082

TRACK ADAPTER

no space for driver
for suspension power cable
incl. strain relief



CODE

90014078

90014079

COMPLETE SUSPENSION SET

incl. ceiling fixation



CODE

90014083

SUSPENSION WIRE SET

cable with loop | 3.0m



CODE

90014131

90014129

for more support and planning of 3-phase track systems,
please check our FAQ section on weverducre.com

3-PHASE TRACK

ACCESSORIES

SUSPENSION OPTIONS

ACCESSORIES

T-CONNECTOR

can be used as feed



CODE

	90014084
	90014085

T-CONNECTOR

can be used as feed



CODE

	90014086
	90014087

T-CONNECTOR

can be used as feed



CODE

	90014088
	90014089

T-CONNECTOR

can be used as feed



CODE

	90014090
	90014091

STRAIGHT CONNECTOR



CODE

	90014080
	90014081

END CAP

end cap left / right



CODE

	90014076
	90014077

END FEED

left



CODE

	90014066
	90014067

END FEED

right



CODE

	90014068
	90014069

MIDDLE FEED

straight



CODE

	90014070
	90014071

L-CONNECTOR

left



CODE

	90014072
	90014073

L-CONNECTOR

right



CODE

	90014074
	90014075

ROOMOR E27

6.0m suspension

	CODE	2482E0B_
		2482E0R_
		2482E0G_

WIRO

single decenter set without ceiling
base | E27 | 2.6m



CODE

	90015160
--	----------

WIRO

single decenter set without ceiling
base | E27 | 6.0m



CODE

	90015161
--	----------

WIRO

6.0m suspension

Decenter 1.0

CODE

	90052051
--	----------

Decenter 2.0

CODE

	90052056
--	----------

Decenter 3.0

CODE

	90052063
--	----------

ROOMOR PAR16

6.0m suspension

	CODE	248220B_
		248220R_
		248220G_

BISHOP SUSPENSION 6.0M

only for BISHOP 4.0 and 6.0

white susp. set - white ceiling base
grey susp. set - grey ceiling base
red susp. set - white ceiling base
black susp. set - black ceiling base

	CODE	90015128
		90015140
		90015136
		90015127

BISHOP SUSPENSION 6.0M

only for BISHOP 8.0

white susp. set - white ceiling base
grey susp. set - grey ceiling base
red susp. set - white ceiling base
black susp. set - black ceiling base


	CODE	90015131
		90015141
		90015137
		90015130

SUSPENSION OPTIONS

ACCESSORIES

INVISIBLE CEILING SUSPENSION SYSTEM

plasterkit | system - with fixation and adjustment with or without steel cable | max. 10kg




CODE

90015195

STRAIN RELIEF

accessory for WIRO suspension




CODE

90052064

HOOK

for multi suspension
REVER | ROCK



CODE

90052066

90052065

SHIEK 4.0 | 5.0

cable ring for 3 lamps



CODE

90059123

90059121

SHIEK 4.0 | 5.0

cable ring for 4 lamps



CODE

90059124

90059122

WIRO

cable wall bracket



CODE

90052062

WIRO

ceiling hook



CODE

90052061

ROOMOR CEILING 1.0 | 2.0

extension tube | 0.5m



CODE

90019192

ROOMOR CEILING 1.0 | 2.0

extension tube | 1.0m




CODE

90019191

CORK MULTI

multiple suspension ceiling base
round for 4 to 8 lamps | incl. PS




CODE

90052015

90052016

CORK MULTI

multiple suspension ceiling base
600mm | 2 lamps | incl. PS




CODE

90052017

90052018

CORK MULTI

multiple suspension ceiling base
900mm | 3 lamps | incl. PS




CODE

90052019

90052020

MULTIPLE SUSPENSION CEILING BASE ROUND

BOX | DOCUS | HEXO | RAY MULTI
WETRO | SHIEK | DINOR | SELO
standard up to 4 lamps
add 90059118 for 5 - 8 lamps



CODE

90052005

90052006

CONNECTOR SET


extra set standard connectors for
5 to 8 pieces | use when
connecting more than 4 Multi
fixtures to one ceiling base round

CODE

90059118

SINGLE CEILING BASE

semi recessed | for shades without
steel wire only



CODE

90052026

90052027

SINGLE SUSPENSION

ceiling base round




CODE

90052022

90052021

STRAIN RELIEF

for multi base | without steel wire
REVER | ROCK | CONE




CODE

90052023

MULTIPLE SUSPENSION CEILING BASE

BOX | DOCUS | HEXO | RAY MULTI
WETRO | SHIEK | SELO
600mm | 2 lamps




CODE

90052007

90052008

MULTIPLE SUSPENSION CEILING BASE

BOX | DOCUS | HEXO | RAY MULTI
WETRO | SHIEK | SELO
900mm | 3 lamps




CODE

90052009

90052010

MULTIPLE SUSPENSION CEILING BASE

BOX | DOCUS | HEXO | RAY MULTI
WETRO | SHIEK | SELO
1200mm | 4 lamps




CODE

90052011

90052012

MULTIPLE SUSPENSION CEILING BASE

BOX | DOCUS | HEXO | RAY MULTI
WETRO | SHIEK | SELO
1500mm | 5 lamps



CODE

90052013


90052014

ACCESSORIES

ACCESSORIES

ROOMOR


shade 1.0



	CODE
	9113610B1
	9113610K1
	911361RW1
	911361GW1
	911361FT1

ROOMOR


shade 2.0



	CODE
	9113620B1
	9113620K1
	911362RW1
	911362GW1
	911362FT1

ROOMOR


shade 3.0



	CODE
	9113630B1
	9113630K1
	911363RW1
	911363GW1
	911363FT1

ROOMOR

shade 4.0



	CODE
	9113640B1
	9113640K1
	911364RW1
	911364GW1
	911364FT1

CORK

bottle 1 | clear glass



CODE
90019013

CORK


bottle 2 | clear glass with closing cap



CODE
90019014

ATIM


louvre long



CODE
90019106

ATIM


louvre carré



CODE
90019105

STAKE


snoot



CODE
90019004

GETTON


big cover



CODE
911141W1
911141D1

X-BEAM


snoot



CODE
90019023

BOX | RAY


flaps for adjustable beam angle
powder coated white



CODE
900401W0

BASE 600


FIFTY FIFTY | SMILE | SWAY | PALOS
with fixation plate



CODE
910016D0
910016A0

BASE 800


FIFTY FIFTY | SMILE | SWAY | PALOS
with fixation plate



CODE
910018D0
910018A0

BASE 1000


FIFTY FIFTY | SMILE | SWAY | PALOS
with fixation plate



CODE
910010D0
910010A0

BASE 400


FIFTY FIFTY | SMILE | SWAY | PALOS
with concrete ground fixation



CODE
910074D0
910074A0

BASE 600


FIFTY FIFTY | SMILE | SWAY | PALOS
with concrete ground fixation



CODE
910076D0
910076A0

BASE 800

FIFTY FIFTY | SMILE | SWAY | PALOS
with concrete ground fixation



CODE
910078D0
910078A0

BASE 300

FIFTY FIFTY | SMILE | SWAY | PALOS
with concrete ground fixation



CODE
910073D0
910073A0

BASE 300


FIFTY FIFTY | SMILE | SWAY | PALOS
with fixation plate



CODE
910013D0
910013A0

BASE 400

FIFTY FIFTY | SMILE | SWAY | PALOS
with fixation plate



CODE
910014D0
910014A0

GROUND FIXATION


ACCESSORIES

PALLUZ C 230
invisible fixation base



CODE
910032D0

PALLUZ C 230




CODE
910033D0

STAKE POLE 200




CODE
910042D0

STAKE POLE 400




CODE
910044D0

X-BEAM
ground spike




CODE
90013115

PALLUZ C 600



CODE
910036D0

PALLUZ C 800




CODE
910038D0

LINUS 150




CODE
910024D0
910024Y0
910024A0

LINUS 350




CODE
910026D0
910026Y0
910026A0

TAPE | PACE
ground spike




CODE
90013102

GETTON POLE
ground spike




CODE
90013101

LINUS
ground spike




CODE
90013103

LINUS
ground fixation




CODE
90013302

LINUS 550




CODE
910028D0
910028Y0
910028A0

GETTON 400



CODE
910052D0

GETTON 600




CODE
910054D0

GETTON 800




CODE
910058D0

PALLUZ C
ground fixation




CODE
90013303

PALLUZ C
ground spike only for invisible
fixation base 230




CODE
90013104

STAKE 1.0 | STIPO
ground spike



CODE
90013106

STAKE POLE | FOLD
ground spike





























CODE
90013107

NOTES

Lined writing area on the left page.























































Lined writing area on the right page.

ICONS

ICON	ENGLISH	GERMAN	FLEMISH	FRENCH	SPANISH	ITALIAN	RUSSIAN
	Cutout Round	Ausschnitt rund	Ronde inbouwopening	Découpe ronde	Corte circular	Taglio tondo	Вырез круглый
	Cutout Square	Ausschnitt eckig	Rechthoekige inbouwopening	Découpe rectangulaire	Corte rectangular	Taglio quadro	Вырез квадратный
	Recessed Depth	Einbautiefe	Inbouwdiepte	Profondeur d'encastrement	Profundidad de empotramiento	Profondità dell'incasso	Установочная глубина
	Low Recessed Depth	Geringe Einbautiefe	Lage inbouwdiepte	Encastré Profondeur faible	Reducida profundidad de empotramiento	Profondità dell'incasso ridotta	Низкая глубина встраивания
	Thickness	Stärke	Dikte	Épaisseur	Espesor	Spessore	Толщина
	Turn Vertical	Vertikal drehbar	Verticaal richtbaar	Orientable vertical	Orientable en vertical	Orientabile in verticale	Наклонный по вертикали
	Turn Horizontal	Horizontal drehbar	Horizontaal richtbaar	Orientable horizontal	Orientable en horizontal	Orientabile in orizzontale	Поворотный по горизонтали
	Beam Angle	Abstrahlwinkel	Reflectorhoek	Faiseau	Ángulo de apertura	Angolo di apertura (del fascio)	Угол рассеивания
	Class 1 Fixture	Leuchte der Klasse 1	Toestel klasse 1	Appareil classe 1	Aparato de clase 1	Lampada classe 1	Класс защиты светильника 1
	Class 2 Fixture	Leuchte der Klasse 2	Toestel klasse 2	Appareil classe 2	Aparato de clase 2	Lampada classe 2	Класс защиты светильника 2
	Class 3 Fixture	Leuchte der Klasse 3	Toestel klasse 3	Appareil classe 3	Aparato de clase 3	Lampada classe 3	Класс защиты светильника 3
	Safety Distance	Sicherheitsabstand	Veiligheidsafstand	Distance de sécurité	Distancia de seguridad	Distanza di sicurezza	Безопасное расстояние
	Glowtest 960	Glühdrahtprüfung 960	Gloeidraadtest 960	Test au fil incandescent 960	Prueba de hilo 960	Resistenza alla temperatura 960°	Тестирование на нагрев 960
	IP Rated	Schutzklasse	IP rating	Indice de protection	Grado IP	Grado di protezione IP	Класс защиты IP
	Plastic	Kunststoff	Kunststof	Plastique	Plástico	Plastica	пластик
	Protection Glass	Sicherheitsglas	Beschermglas	Verre de protection	Vidrio de protección	Protetto con vetro	Защитное стекло
	Tempered Glass	Temperiertes Glas	Getemperd beschermglas	Verre de protection température sur verre	Cristal atemperado	Vetro temperato	Закалённое стекло
	Fixation Ceiling	Deckenmontage	Plafondbevestiging	Montage au plafond	Montaje en techo	Montaggio a soffitto	Потолочное крепление
	Fixation Wall	Wandmontage	Wandbevestiging	Montage au mur	Montaje en pared	Montaggio a parete	Настенное крепление
	Fixation Floor	Bodenmontage	Vloerbevestiging	Montage au sol	Montaje en suelo	Montaggio a pavimento	Напольное крепление
	Up/Down	aufwärts/abwärts strahlend	Verlichting up of down	Éclairage haut ou bas	Emisión superior/inferior	Luce monoemissione sopra/sotto	Освещение вверх или вниз
	Side	seitlich abstrahlend	Verlichting lateraal	Éclairage laterale	Emisión lateral	Luce laterale	Освещение в сторону
	Up and Down	direkt und indirekt abstrahlend	Verlichting up en down	Éclairage haut et bas	Emisión superior e inferior	Luce monoemissione sopra e sotto	Освещение вверх и вниз
	Surround	allseitig abstrahlend	Sfeerverlichting	Éclairage multidirections	Emisión perimetral	Luce diffusa	Освещение вокруг
	CE/VDE/ENEC Certificate	CE Zertifikat	CE Certificaat	Certificat CE	Certificado CE	Certificato CE	Сертификат CE
	Available mid 2019	Verfügbar Mitte 2019	Beschikbaar midden 2019	Disponible mi-2019	Disponibile a mediados de 2019	Disponibile a metà del 2019	Доступно в середине 2019 года

A RAINBOW OF POSSIBILITIES

COLOUR CODES

	A Aluminium Anodised		E/WB White Texture + Black		GR Greyish Rose		N Black Chrome		R/RW Coral Red + White Texture		W White Texture RAL 9010
	A Anthracite Grey RAL 7016		F Aluminium Brushed + Black		HR Hip Rose		NB Black Texture + Black Chrome		R/VB Black Texture + Rust		W Autumn White
	AY Amber Yellow		F/FT Felt Grey		I Inox		O Green RAL 6019		S Silver / Grey RAL 9006		WB Black Texture + White Opal Glass
	B Black Texture RAL 9005		G Gold		J White Texture + Gold		OR Orange		SB Light Blue		WN Walnut
	B Simple Black		G Light Gold		K Black Texture + Gold		P Copper		SG Smoke Grey		X White Texture + Aluminium Brushed
	C Chrome		G Cement Grey RAL 7033		L Aluminium Brushed		P Copper + Black Texture		SY Soft Yellow		Y Brown Texture RAL 8019
	CW Champagne White		G/GW Grey + White		M Matt Chrome		P Pink Copper		T Grey Texture		YB Black Texture + Brown Opal Glass
	D Dark Grey Texture RAL 9007		GB Black Texture + Light Gold		MB Marble Black		Q Bronze		TG Tea Green		YE Yellow
	D Multi Colour		GG Greyish Green		MW Marble White		R Coral Red RAL 3016		V Rust		Z/PB Black Texture + Copper

HELLO, CAN YOU HEAR ME?

CONTACT

HEAD OFFICE + SHOWROOM

WEVER & DUCRÉ BVBA

Spinnerijstraat 99/21
8500 Kortrijk
Belgium
Phone +32 56 49 28 00
office@weverducre.com
weverducre.com

REPRESENTATIVE OFFICES

WEVER & DUCRÉ SCHWEIZ GMBH

Kellerstrasse 22
6005 Luzern
Switzerland
Phone +41 41 361 60 60
office.ch@weverducre.com

WEVER & DUCRÉ INC.

133 West 19th Street, 9th Floor
New York, NY 10011
United States of America
Phone +1 212 343 8100
office.us@weverducre.com
weverducre.us

SHOWROOMS

WEVER & DUCRÉ DEUTSCHLAND GMBH

Schanzenstrasse 36, Geb. 234B
51063 Cologne
Germany
Phone +49 221 13 06 49 60
Fax +49 221 13 06 49 69
office.de@weverducre.com

WEVER & DUCRÉ ASIA PACIFIC LTD.

RM. 1413, Block A, Sea View Estate
2 Watson Road North Point
Hong Kong
Phone +852 21 10 69 24
Fax +852 31 06 40 96
office.hk@weverducre.com
office.cn@weverducre.com

WEVER & DUCRÉ FRANCE

10, rue Pecquay
75004 Paris
France
Phone +33 1 40 29 81 01
office.fr@weverducre.com

WEVER & DUCRÉ AB

Hårdvällsgatan 18
115 46 Stockholm
Sweden
Phone +46 708 44 84 84
office.se@weverducre.com

WEVER & DUCRÉ UK

23 Batemans Row
London EC2A 3HH
United Kingdom
Phone +44 20 31 74 01 77
info.uk@weverducre.com

WEVER & DUCRÉ POLAND

Diamond Business Park
Posag 7 Panien Street no 1,
02-495 Warsaw
Poland
Phone +48 73 03 30 341
office.pl@weverducre.com

WEVER & DUCRÉ ITALY


Via Giannino Ancillotto, 15
30027 San Doná di Piave - Venezia
Italy
Phone +39 04 21 17 78 388
office.it@weverducre.com

WEVER & DUCRÉ AUSTRIA

showroom.at@weverducre.com
WEVER & DUCRÉ IBERIA info.es@weverducre.com
WEVER & DUCRÉ NETHERLANDS info.nl@weverducre.com
WEVER & DUCRÉ RUSSIA info.ru@weverducre.com
WEVER & DUCRÉ MIDDLE EAST office.me@weverducre.com
WEVER & DUCRÉ FINLAND office.fi@weverducre.com

1st edition, March 2019, ©Wever & Ducré® bvba.

All prices are non-binding recommended prices excluding VAT, lamps (bulbs) are not included. The prices and terms of payment stated in our order confirmation shall apply. To all prices and all extra expenses, we add the legally applicable value added taxes. Should our costs increase by the time of delivery, the prices can be recalculated on a pro rata basis. The prices stated shall apply net ex works. Information on availability as well as delivery terms and dates are provided as a point of reference only and are not binding. Prices are valid till the publication of a new price list. We expressly reserve the right to make changes in price, measurements and design. The details provided in this catalogue were correct at the time of publication. They do not constitute any kind of obligation on our part and are for information only. We shall not be held liable for any discrepancies between the illustrations or descriptions given and the actual product neither for any misprints and/or typing errors. We reserve the right to make alterations or modifications to our products at any time. All mentioned RAL codes are indicative and approximative. We shall not be held liable for any discrepancies which may occur. All mentioned lumen values refer to white luminaires (in terms of finishing, covers or housings). Further lumen values on request. The general terms and conditions of Wever & Ducré bvba shall apply to all purchases and orders. The applicable version of the general terms and conditions can be viewed at www.weverducre.com/en/downloads.

What's that? A whole new product range, and already several project references? See it this way: Inspiration is key to success in design, so what we care for most is inspiring you and showing you the potential of what we at Wever & Ducré do. Thus, we took the liberty of editing some original images to give you an impression of how our luminaires improve living, office, outdoor, and other spaces. These pictures are marked with an 

Corian® is a registered trademark of DuPont™

ThermoX® is a registered trademark of KAISER GmbH & Co KG (www.kaiser-elektro.de), a company independent of Wever & Ducré.

ARTWORK

Steffen Seeger

GRAPHIC DESIGN

Carina Erlach, Lisa Hauser

PRINT PRODUCTION

Lisa Hauser

ILLUSTRATION

Lukas Hochenwarter

TEXT

Tanja Petschnig

LITHOGRAPHY

Volker Waldhauser

PROJECT MANAGEMENT

Victoria Konrad

PRINTING

Drukarnia Perfekt S.A., Warsaw, Poland

PHOTOGRAPHY

311PHOTOGRAPHY (p. 344-345) | Adelina Illiev (p. 442) | Aikon Producties bvba (p. 46) | Aleksandr Del Cero (p. 266) | Alexander Maria Lohmann (p. 264, 318) | Alexander Schwarz (p. 532) | Artion Istuganov (p. 496) | Aurelien Aumont (p. 152) | B.C. Gassner (p. 474) | Bruno Eggermont (p. 142) | Cafeine.be architectuurfotografie (p. 524) | Carlo Falanga - Torre del Greco (p. 354) | Christian Brandstätter (p. 154, 480) | Christian Repnik (p. 542) | Christian Weinrich (p. 116 - 125, 132) | Christoph Steinbauer (p. 110, 126, 216, 296, 324, 392, 458, 470, 492, 548, 562, 564) | Corinna Unterkofler (p. 310) | Corinna Unterkofler / Joachim Grubelnik (p. 129, 346, 430-431, 464) | Croce & Wir (p. 546) | Dani Rovira Fotografia (p. 544) | Das Bildwerk (p. 130) | David Aebi (p. 552) | Dizzart Studio (p. 260) | Edgar Navarre (p. 432) | Egon Gade (p. 176) | Emma Marshall Photography (p. 146-147) | FOTHOMOHITO (p. 338) | George Fakaros (p. 566) | Georges Leroux (p. 135) | Gerald Rafelghem (p. 166, 280, 402, 530) | Hannes Windrath (p. 144) | Jaro van Meerten, The Art of Living Magazine (p. 198) | Jean Marc Manson (p. 248) | Jiří Dymáček (p. 510-511) | Joachim Grothus (p. 246) | Johannes Meger (p. 274, 276) | Justine Szczepanycyk (p. 218) | KAPPFHAMMER (p. 74) | Kim Forrás (p. 182, 372, 388, 498, 560) | Kris Dekeijser (p. 48, 50, 56, 60, 64, 68, 128, 138, 140, 156-164, 172, 180, 184, 186, 190-196, 202, 206, 208, 222-226, 232-238, 241, 244, 252, 256, 270, 278, 282-288, 292, 294, 298 - 301, 308, 311, 314, 320, 328, 332, 340, 350, 352, 356-359, 366, 370, 378, 382-386, 394, 398, 404, 416, 420, 422, 426-428, 468, 490, 512, 520, 534, 556, 572, 576) | Kurt Hoerbst (p. 390, 466) | Kurt Kuball (p. 240, 500, 550) | Laura Bertone (p. 242, 268) | Leonas Garbačauskas Photographer (p. 536) | Lukas Roth (p. 102) | Lupi Spuma Fine Photography (COVER, p. 8-16, 115, 374) | Marc Hadden (p. 150, 170, 316) | Marco Richter Photography (p. 188, 400) | Martin Baitinger (p. 58-59) | Martin Steinthaler (p. 478) | Martin Zilka (p. 554) | Massimo Spicca (p. 322-323) | Mattia Aquila (p. 254, 348) | Miquel Llonch (p. 30) | Miriam Raneburger (p. 462) | Nick Guttridge (p. 210) | Nikki Candelero (p. 250-251) | Oliver Nauditt (p. 334) | paul ott fotografiert (p. 104-108, 111, 112, 329, 502, 506, 508, 514-517, 574, 578) | Paula Beetlestone (p. 504) | Peter Holgersson AB (p. 488) | Photojoost (p. 368) | Salvatore Guido (p. 22-28, 32-40, 44, 66, 70, 72, 76-100, 214, 220, 272, 312, 406 - 414, 436, 444, 448) | Schwarz+Licht (p. 302) | Selma Hengeveld (p. 52) | Sonja Zettl (p. 54, 55) | Soren Kristensen (p. 174) | Sourbron Fotografie (p. 342) | Studio Erick Saillet (p. 178, 258, 434) | Tiziano Cristofoli (p. 262-263) | Tom Ferguson (p. 330, 452) | Vogelsänger Studios (p. 376-377) | Walters Media (p. 438, 440-441) | wide shot photography Alexandre Van Battel (p. 136) | Zvonimir Mihaljek (p. 494)

**THIS
IS NOT
THE
END**

PAY A VISIT TO [WEVERDUCRE.COM](https://www.weverducre.com)



WEVERDUCRE.COM